

STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power Pmin W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 8012-40/500S	8.2 ... 12.4 GHz	40 ±1.5	500	0.2	15	1.1:1	WR-90	SMA-f

S: Single directional coupler

OPTIONS

1) male RF input connector


2) alternative main line connectors


X) custom frequency range and custom coupling attenuation upon request

*) WRD 650: below 6.2 GHz, VSWR and directivity deteriorate

Notice:

Under normal operating conditions all Directional Couplers do not need to be mounted to a heatsink. However, if the units permanently run into high mismatch conditions at full rated power, the circuits will heat up significantly. In this case, we would recommend the units be mounted to a suitable heatsink or metal surface, capable to maintain a baseplate temperature of +60°C max.

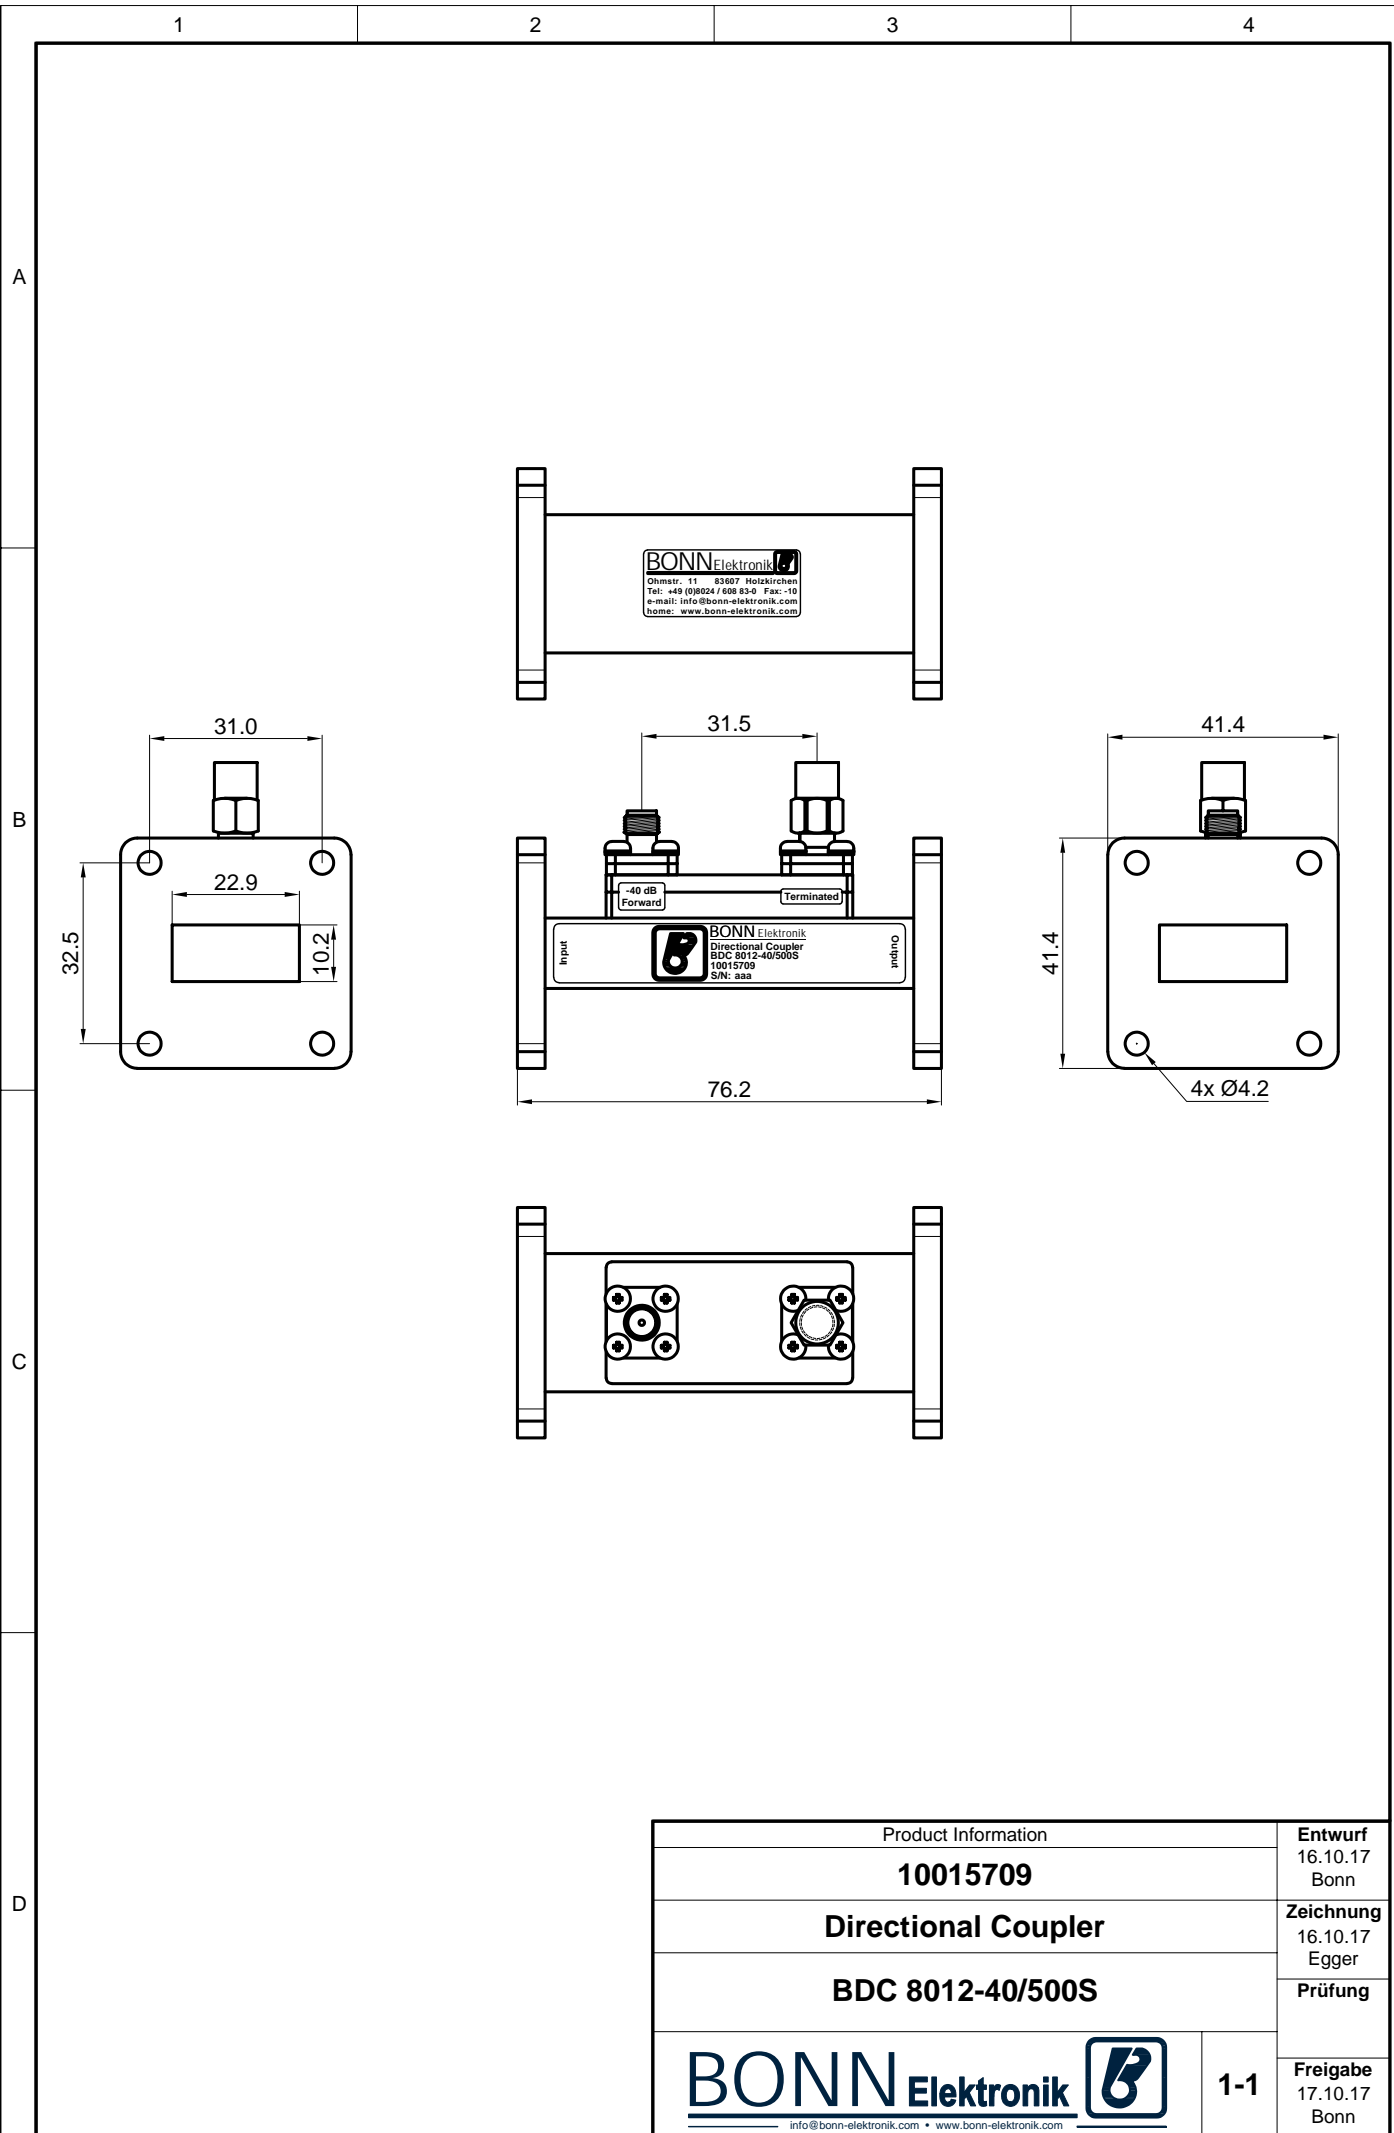

Product Information		Entwurf 16.10.17 Bonn
10015709		Zeichnung 16.10.17 Egger
Directional Coupler		Prüfung
BDC 8012-40/500S		Freigabe 17.10.17 Bonn
BONN Elektronik 		1-1
info@bonn-elektronik.com • www.bonn-elektronik.com		