




STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power P _{min} W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 0210-30/150	20 ... 1000 MHz	30 ±1.5	150	0.8	20	1.3:1	N-f	SMA-f

S: Single directional coupler

OPTIONS

- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

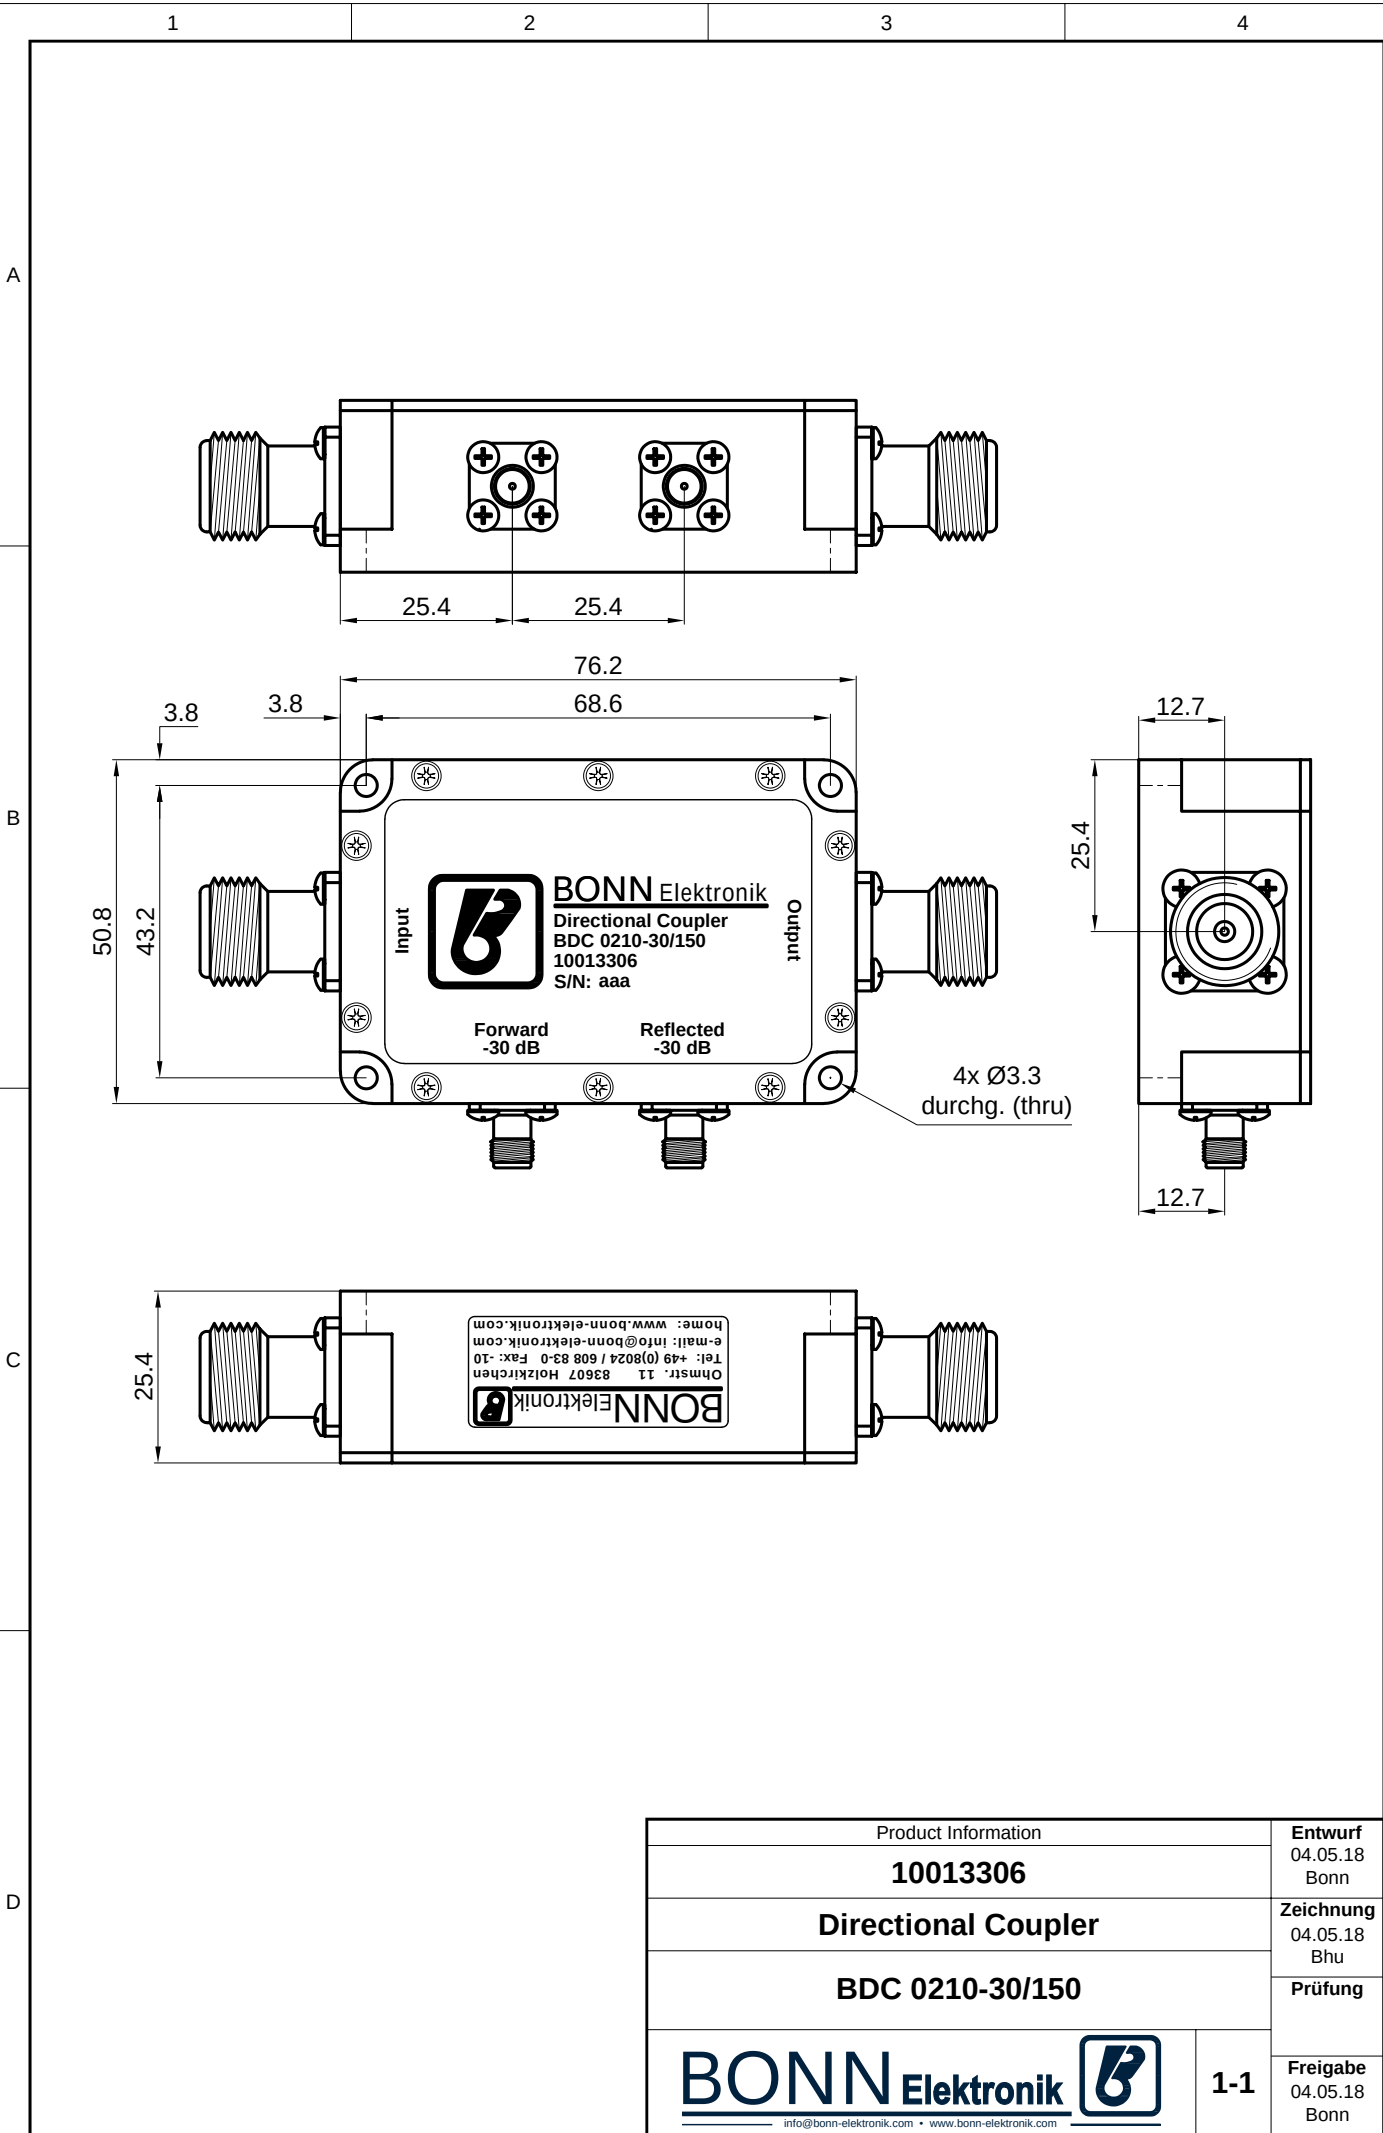


A

B

C

D

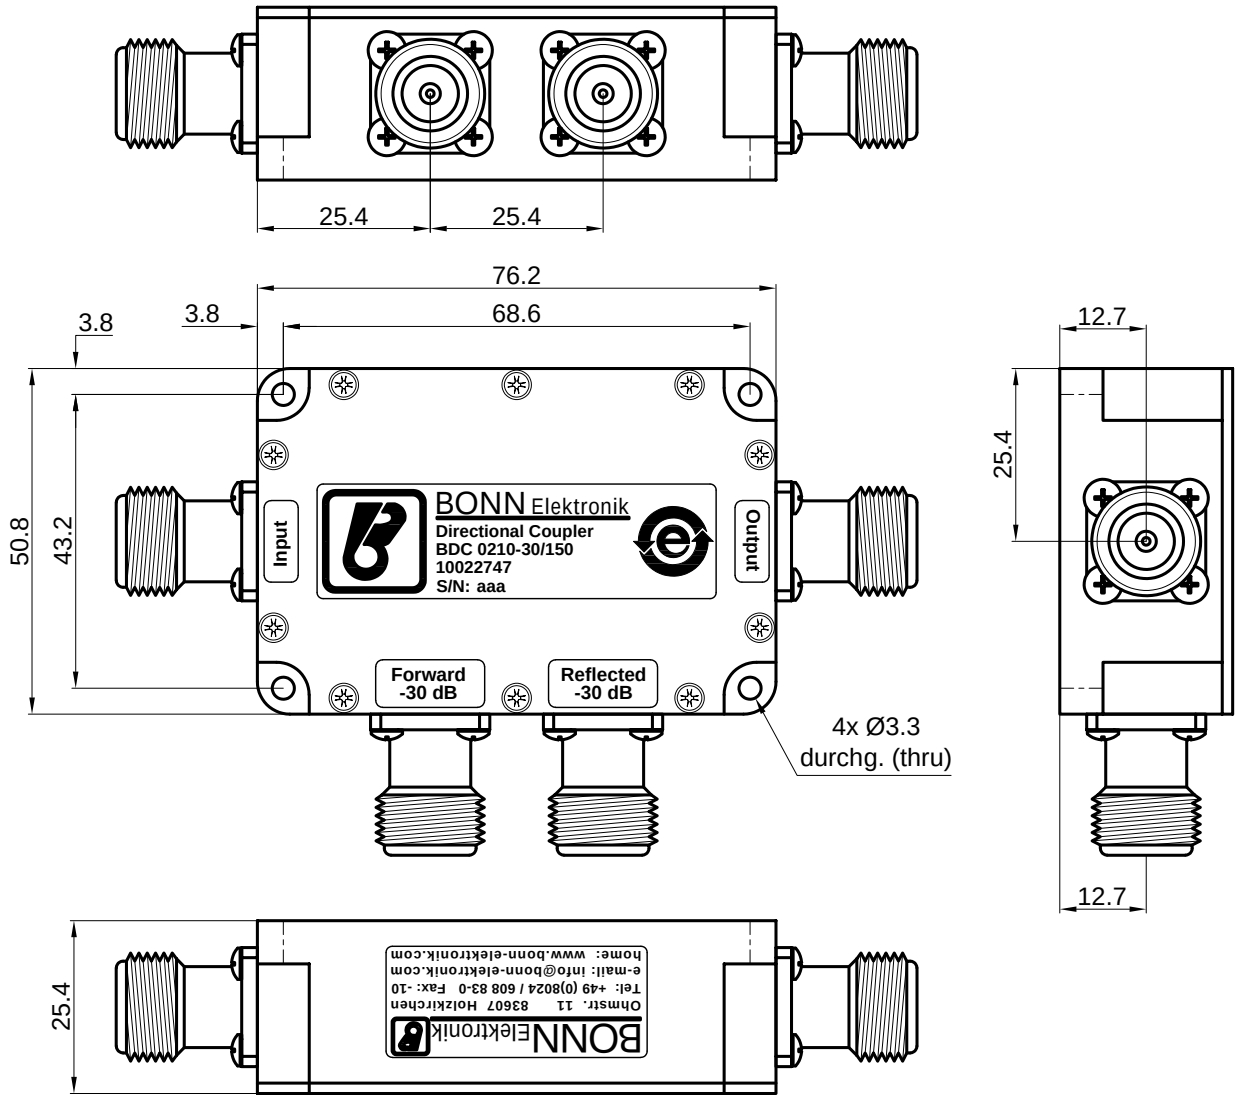

Product Information		Entwurf
10022747		14.12.2021 Bonn
Directional Coupler		Zeichnung 14.12.2021 Bhu
BDC 0210-30/150		Prüfung
Blatt 1-1		Freigabe 14.12.2021 Bonn