




STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power P _{min} W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 0100-50/1000	9 kHz ... 1000 MHz	50 ±1.5	1000	0.45	25	1.3:1	SC-f	SMA-f

S: Single directional coupler


OPTIONS

- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

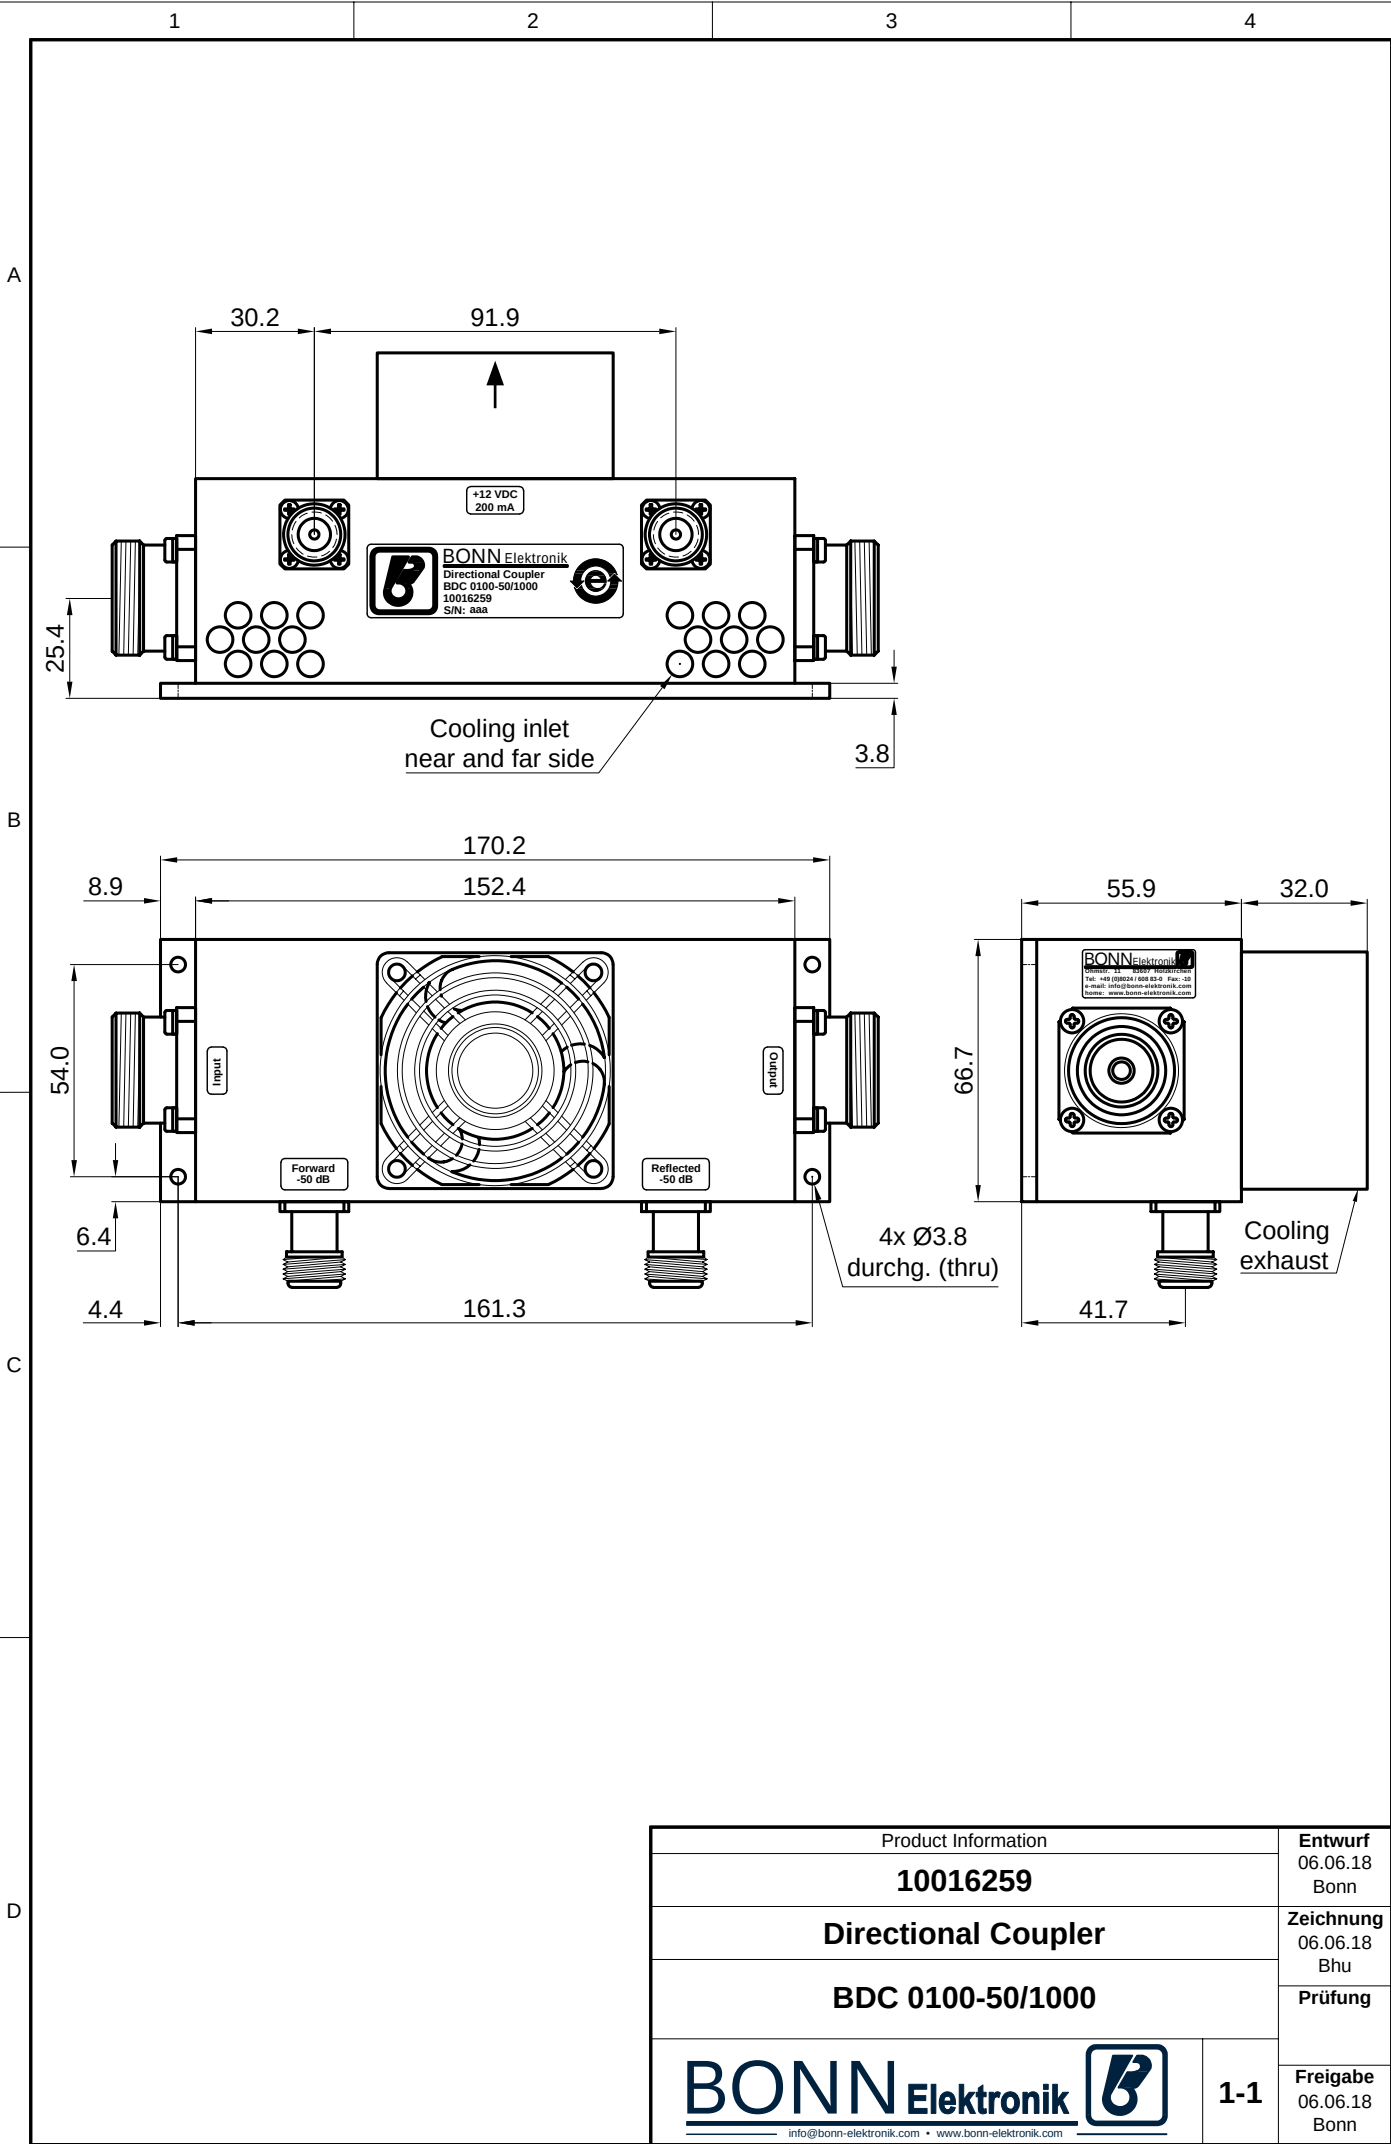


Product Information		Entwurf
10016259		06.06.18 Bonn
Directional Coupler		Zeichnung
BDC 0100-50/1000		06.06.18 Bhu
BONN Elektronik  info@bonn-elektronik.com • www.bonn-elektronik.com		Prüfung
		Freigabe
1-1		06.06.18 Bonn

A

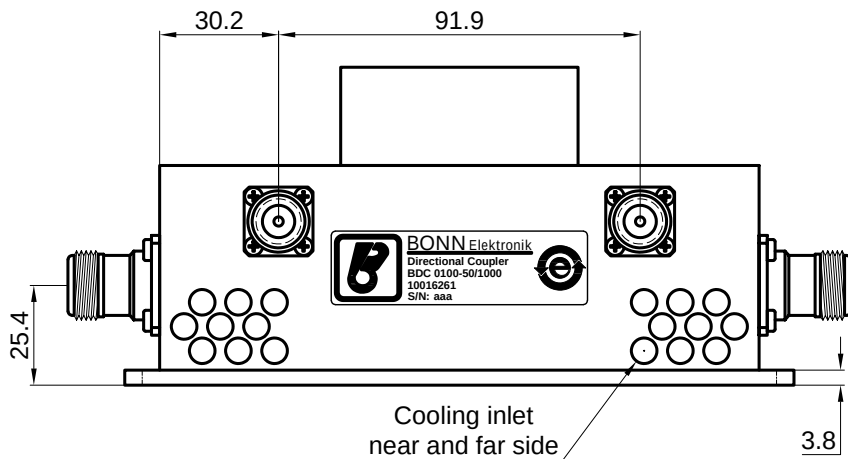

B

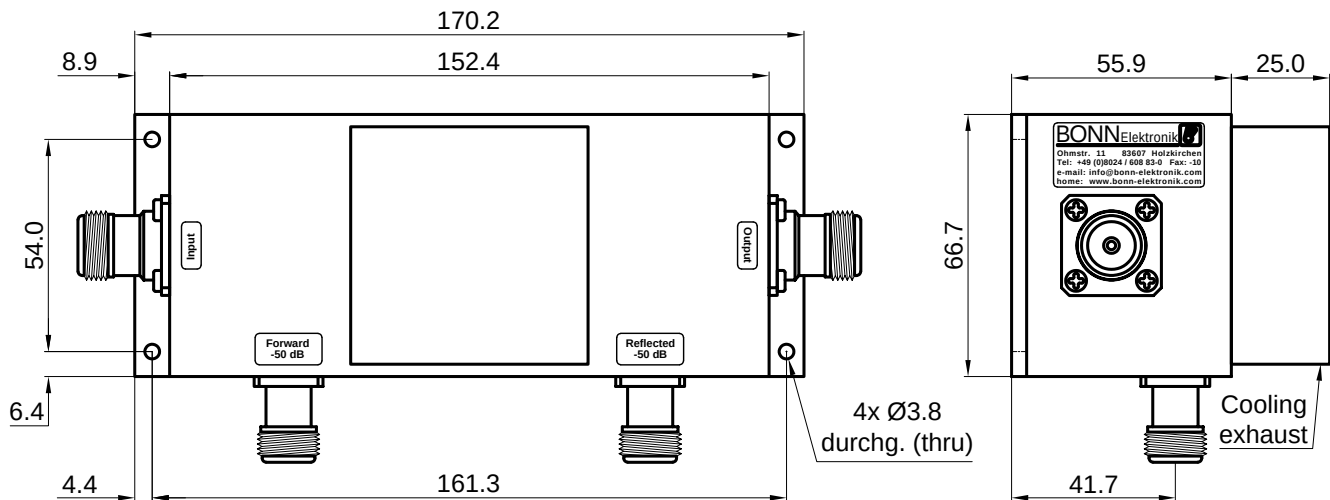

C

D

Product Information		Entwurf
10016261		05.06.18 Bonn
Directional Coupler		Zeichnung
BDC 0100-50/1000		05.06.18 Bhu
 info@bonn-elektronik.com • www.bonn-elektronik.com		Prüfung
		Freigabe
1-1		06.06.18 Bonn