



STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power Pmin W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 0120-30/50	1 ... 2000 MHz	30 ±2	50	1.25	18	1.35:1	SMA-f	SMA-f

S: Single directional coupler

OPTIONS


- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

A

B

C

D

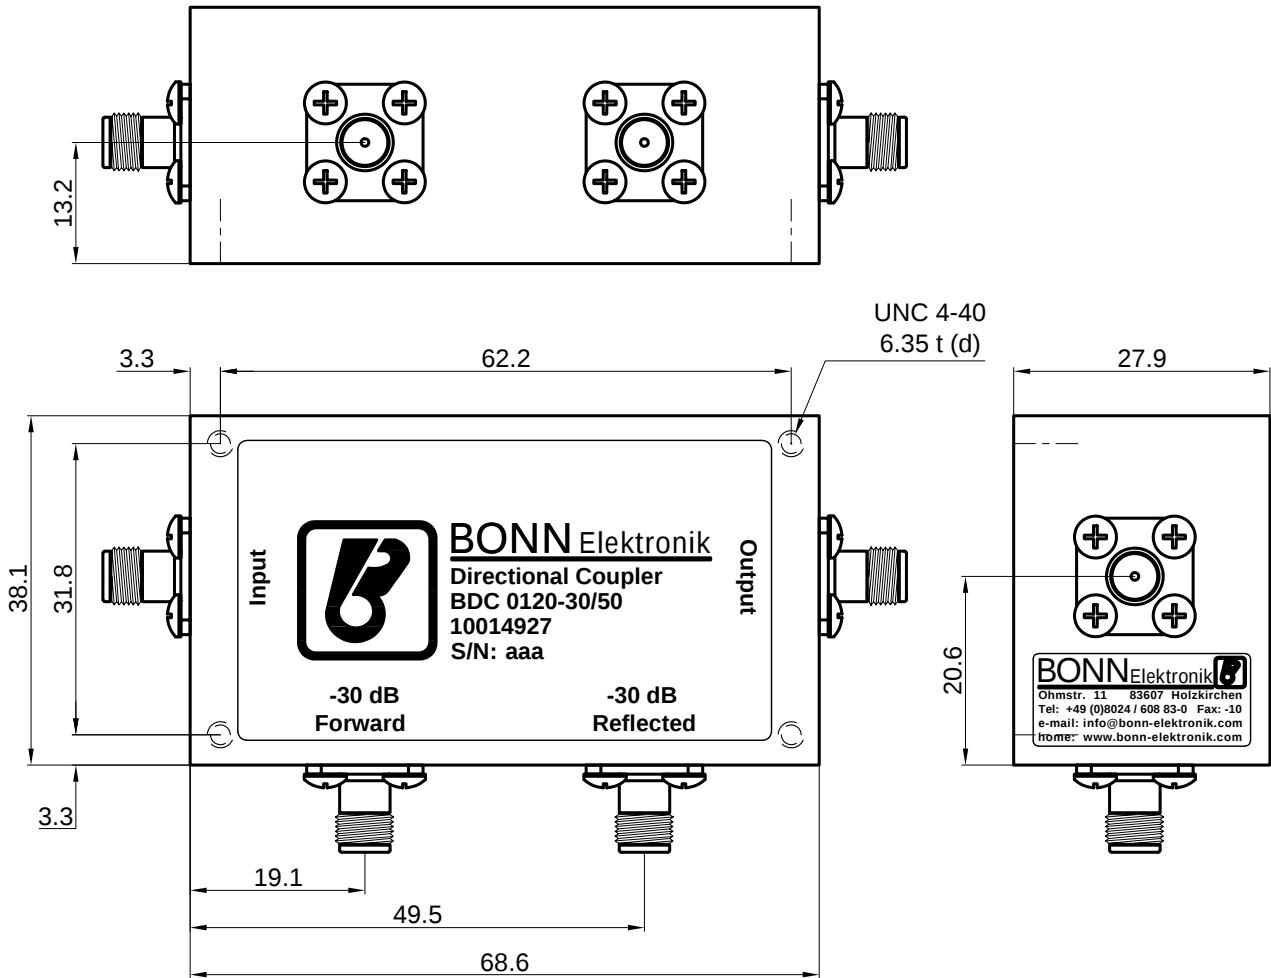

Product Information		Entwurf
10014927		12.03.18 Bonn
Directional Coupler		Zeichnung 12.03.18 Bhu
BDC 0120-30/50		Prüfung
BONN Elektronik 		Freigabe 24.04.18 Bonn
info@bonn-elektronik.com • www.bonn-elektronik.com		1-1