






STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power Pmin W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 0103-60/15000	1 ... 30 MHz	60 ±1.5	15000	0.05	25	1.1:1	1 5/8" EIA	N-f

S: Single directional coupler

OPTIONS


- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

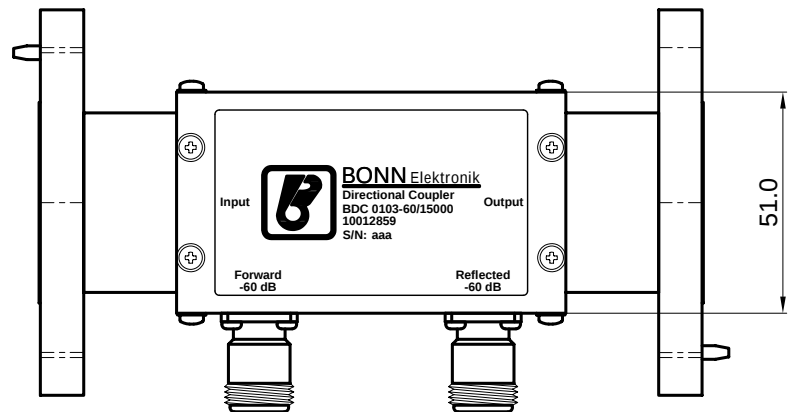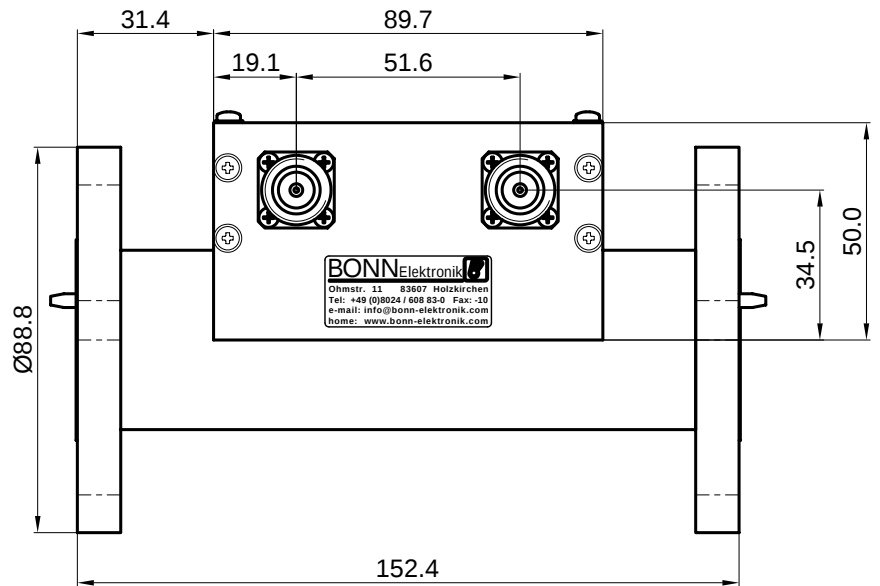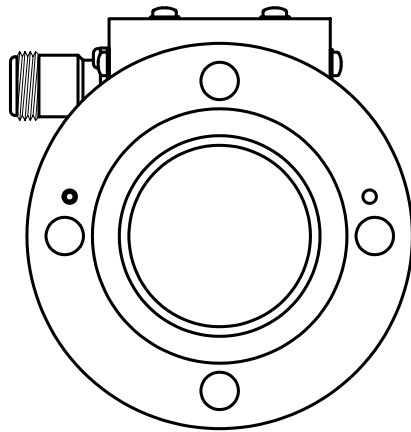

Product Information		Entwurf 02.05.18 Bonn
10012859		
Directional Coupler		Zeichnung 02.05.18 Bhu
BDC 0103-60/15000		
		Prüfung
		Freigabe 16.05.18 Bonn

Dieses Dokument ist Eigentum der Firma Bonn Elektronik GmbH.
Vervielfältigung und Veröffentlichung ohne ausdrückliche Genehmigung ist untersagt. Änderungen im
Sinne des technischen Fortschritts können ohne Vorankündigungen vorgenommen werden. Wenn
nichts anders angegeben alle Maße in Millimeter.

This document is the property of Bonn Elektronik GmbH.
Reproduction and release without express permission is strictly prohibited.
We reserve the right to introduce modifications without prior notification, where they serve
technical progress. Unless otherwise indicated all dimensions in millimeters.

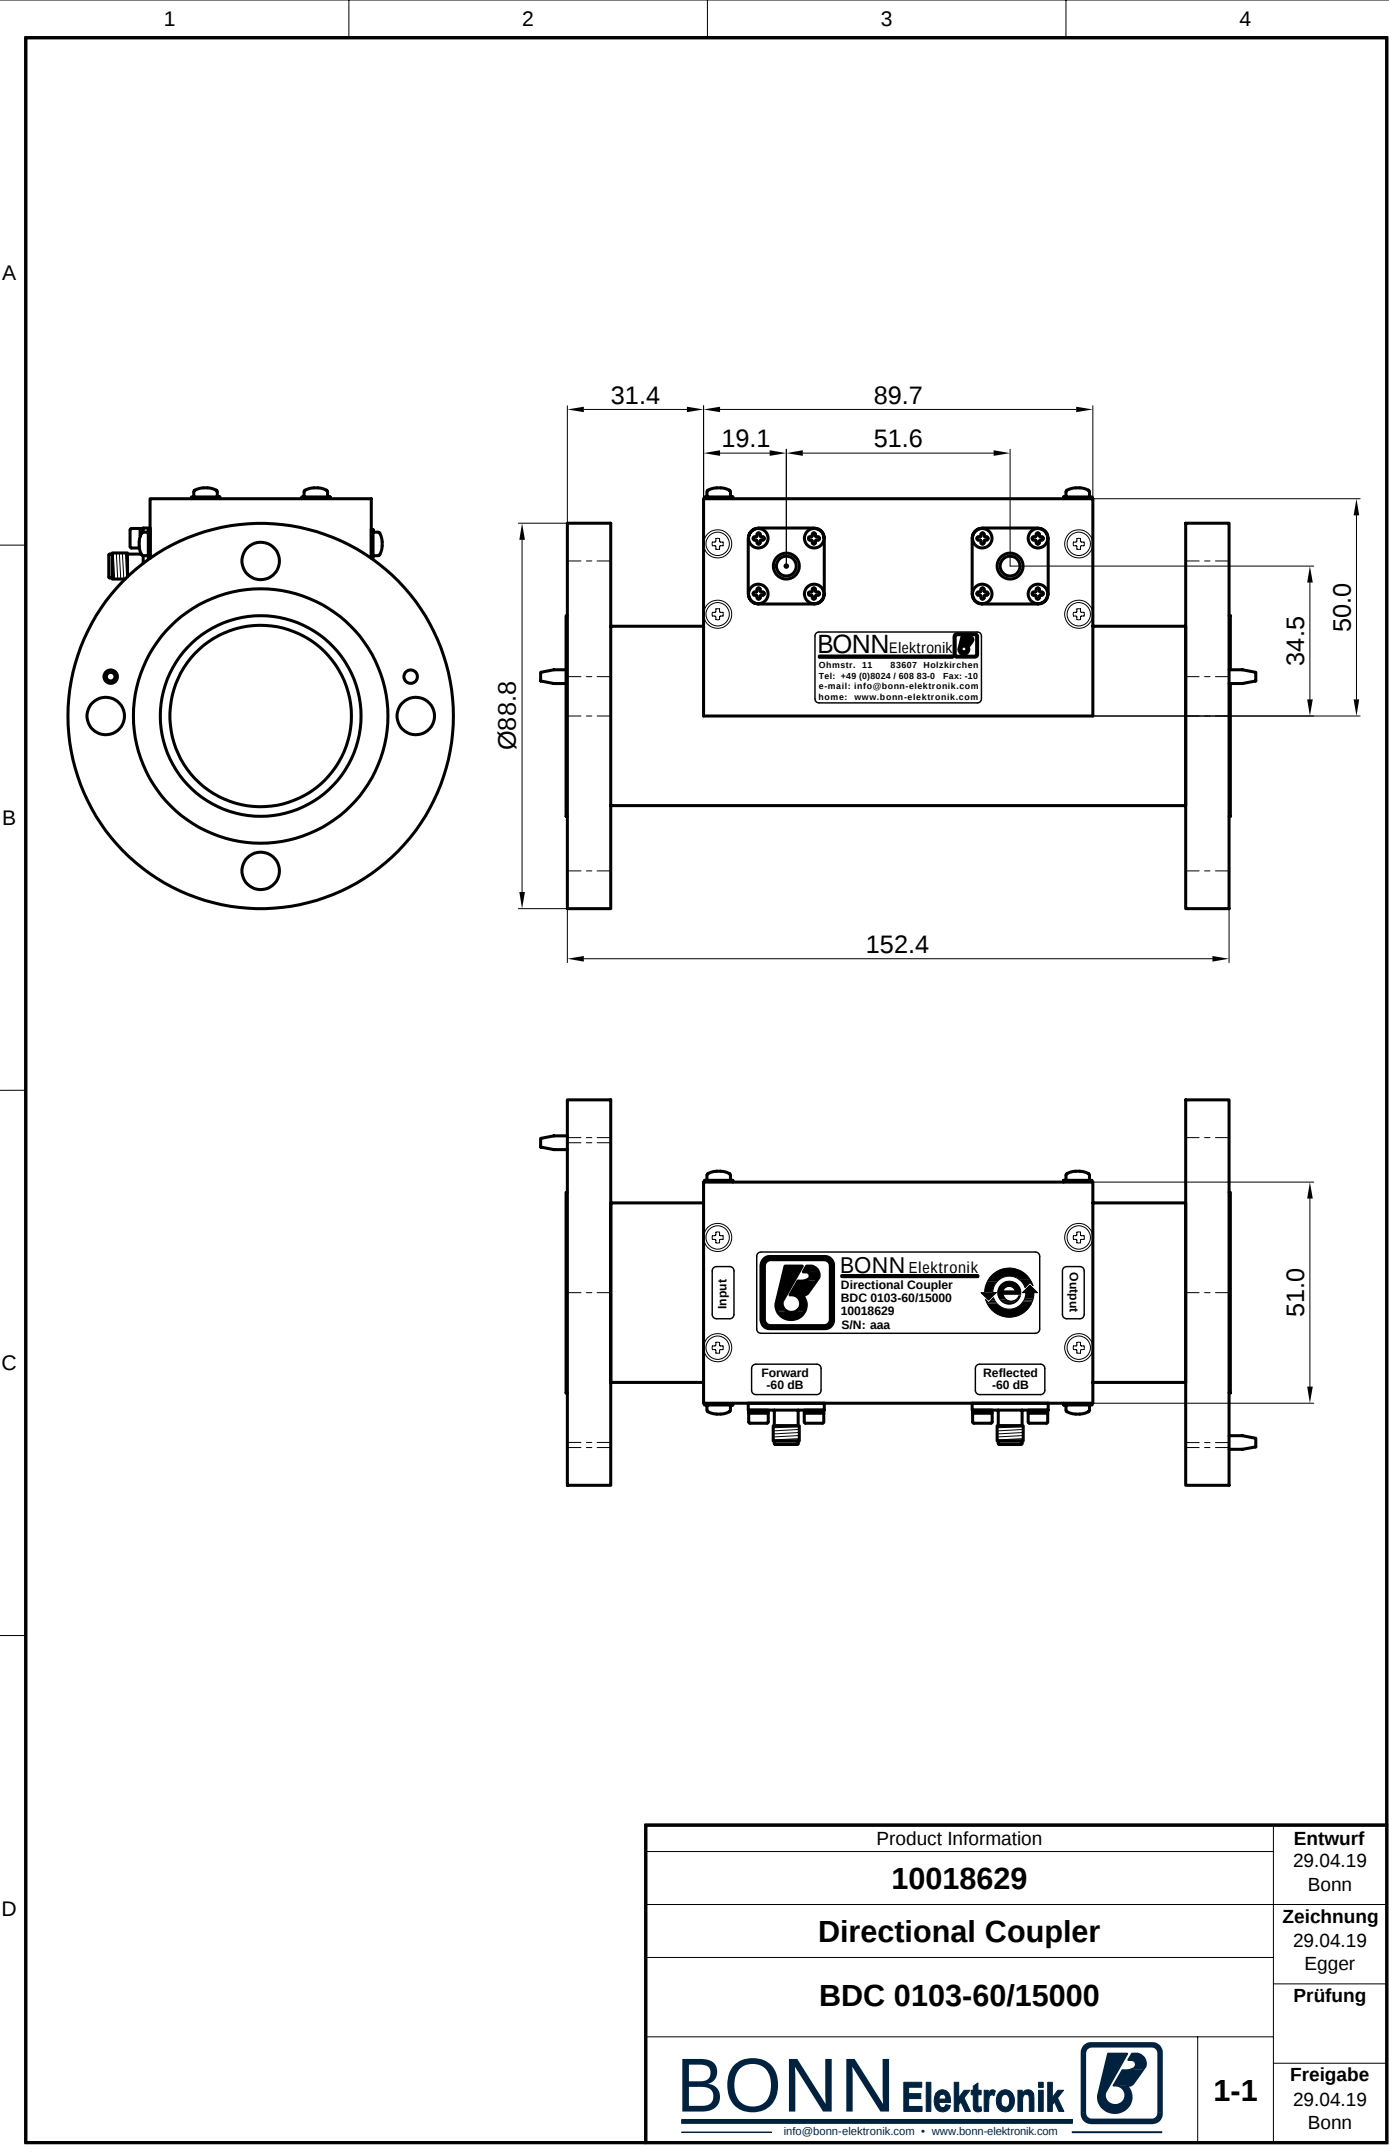

Product Information		Entwurf
10018629		29.04.19 Bonn
Directional Coupler		Zeichnung
BDC 0103-60/15000		29.04.19 Egger
BONNElektronik  info@bonn-elektronik.com • www.bonn-elektronik.com		Prüfung
		Freigabe
1-1		29.04.19 Bonn