

BDC 20 ... 130 MHz Directional Coupler

STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power Pmin W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 0213-60/10000	20 ... 130 MHz	60 ±1.5	10000	0.1	25	1.15:1	1 5/8" EIA	SMA-f

S: Single directional coupler

OPTIONS




- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

A

B

C

D

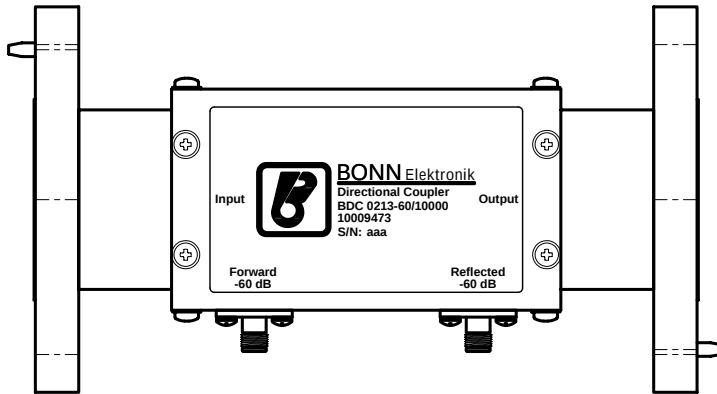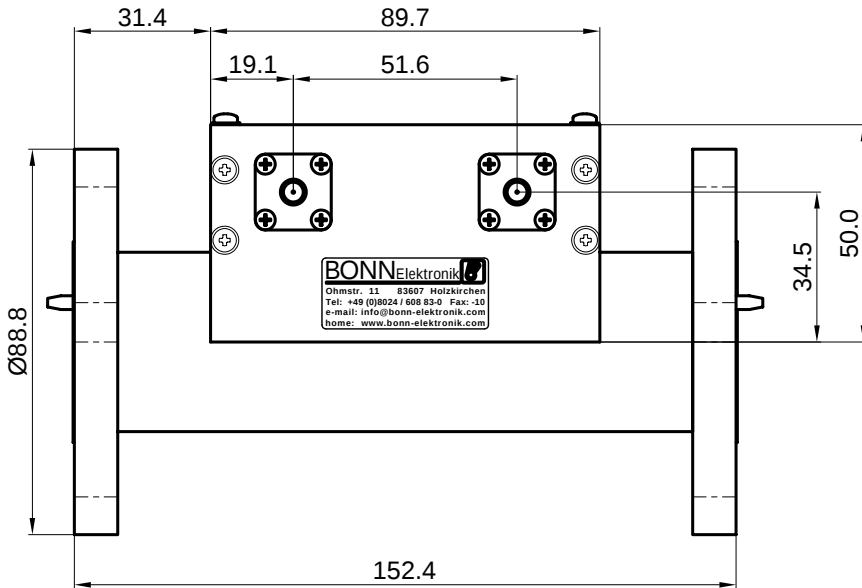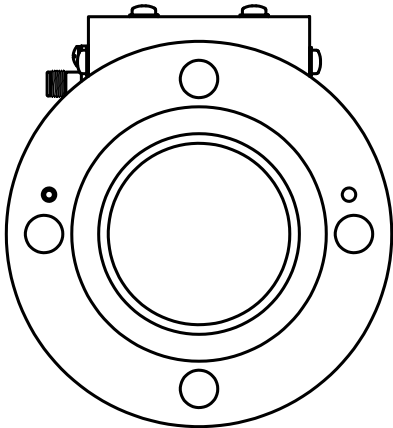

Product Information		Entwurf
10009473		04.05.18 Bonn
Directional Coupler		Zeichnung
BDC 0213-60/10000		04.05.18 Bhu
		Prüfung
BONNElektronik		Freigabe
1-1		16.05.18 Bonn