



STANDARDMODELLE

Modell	Frequenzbereich X)	Kopplung X) dB	Leistung P _{min} W	Dämpfung max dB	Richtschärfe min dB	VSWR max Hauptarm	Hauptarm Stecker 1), 2)	Koppelarm Stecker 3)
BDC 4018-20/50S	4 ... 18 GHz	20 ±1,5	50	0,6	12	1.4:1	SMA-f	SMA-f


S: Einzel-Richtkoppler

OPTIONEN

- 1) Männlicher Stecker am HF-Eingang
- 2) Andere Steckerart am Hauptarm
- 3) N-f Stecker an den Koppelports
- X) Spezielle Frequenzbereiche und Koppeldämpfungen auf Anfrage

Dieses Dokument ist Eigentum der Firma Bonn Elektronik GmbH. Vervielfältigung und Veröffentlichung ohne ausdrückliche Genehmigung ist untersagt. Änderungen im Sinne des technischen Fortschritts können ohne Vorankündigungen vorgenommen werden. Wenn nichts anders angegeben alle Maße in Millimeter.

This document is the property of Bonn Elektronik GmbH. Reproduction and release without express permission is strictly prohibited. We reserve the right to introduce modifications without prior notification, where they serve technical progress. Unless otherwise indicated all dimensions in millimeters.

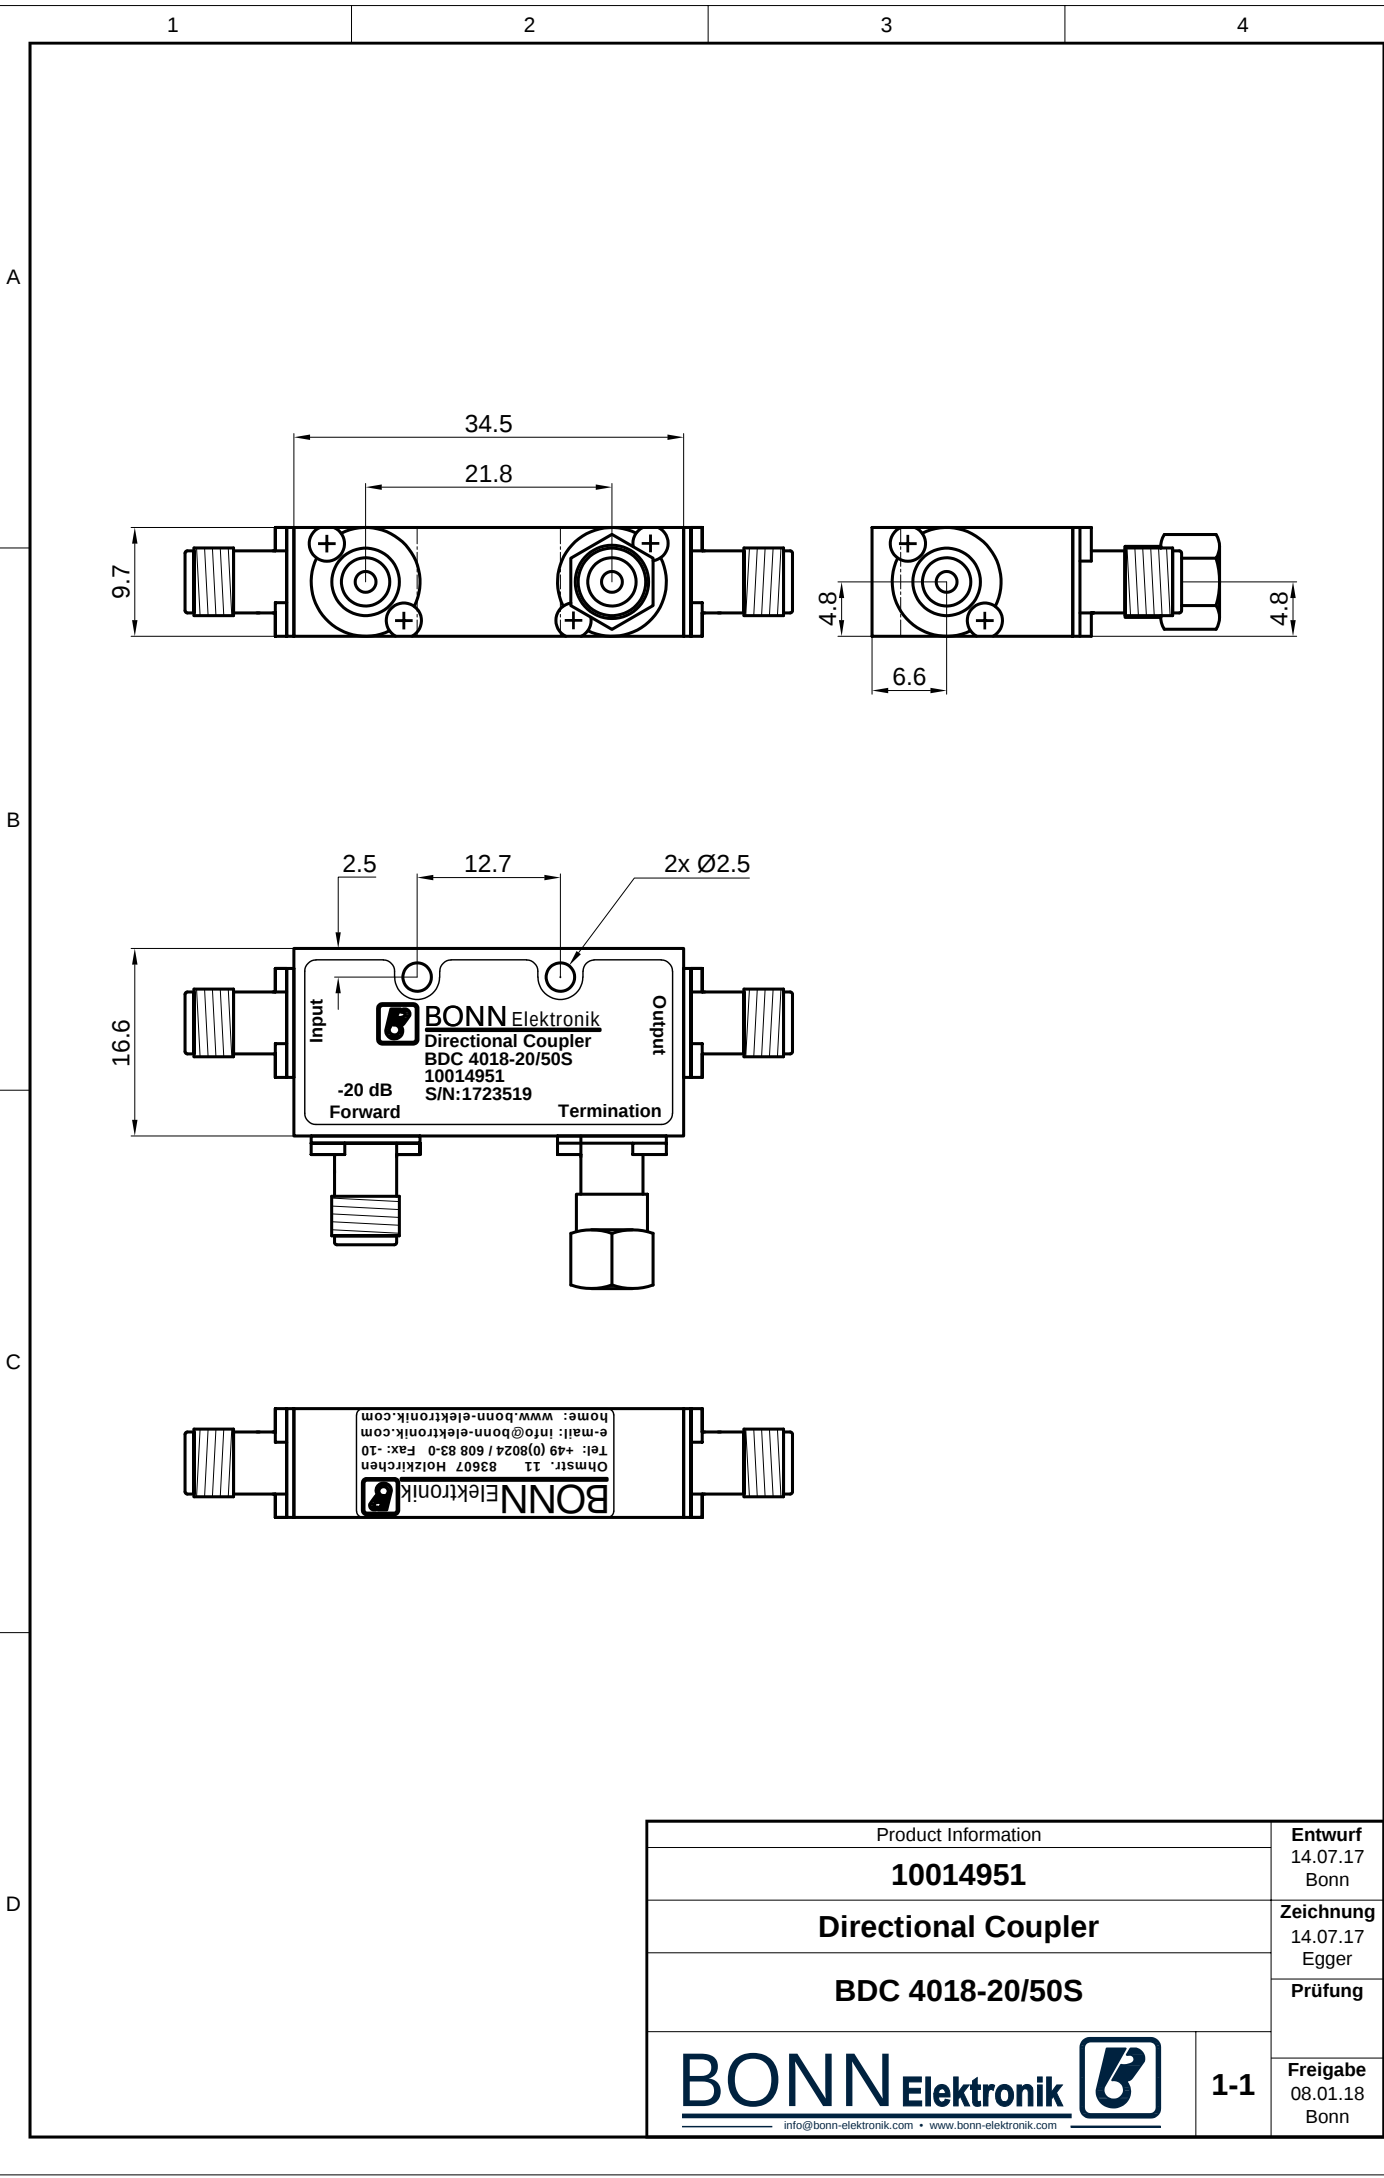

Product Information		Entwurf
10014951		14.07.17 Bonn
Directional Coupler		Zeichnung
BDC 4018-20/50S		14.07.17 Egger
		Prüfung
BONN Elektronik 		Freigabe
info@bonn-elektronik.com • www.bonn-elektronik.com		08.01.18 Bonn
1-1		

