

BDC 20 ... 1000 MHz

Directional Coupler

STANDARD MODELS


Model	Frequency Range X)	Coupling X) dB	Power P _{min} W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 0210-53/1200	20 ... 1000 MHz	53 ±2	1200	0.4	20	1.3:1	7-16-f	SMA-f

S: Single directional coupler


OPTIONS

- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

A

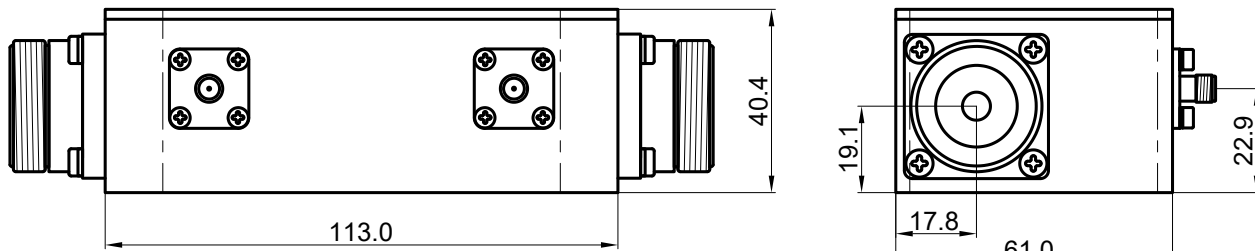

B

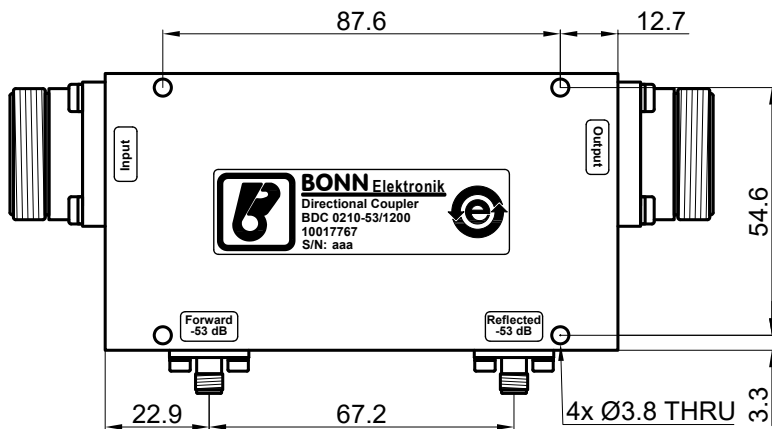

C



D

Product Information		Entwurf
10017767		08.11.18 Bonn
Directional Coupler		Zeichnung
BDC 0210-53/1200		08.11.18 Egger
BONN Elektronik 		Prüfung
1-1		Freigabe
info@bonn-elektronik.com • www.bonn-elektronik.com		08.11.18 Bonn