

STANDARD MODELS

Model	Frequency Range	Power CW min W	Attenuation nom / Variation dB	VSWR max	Input Connector	Output Connector	Dimensions (L, W, H) mm	Weight kg	Part Number
BCA 0030-40/1000	DC ... 3 GHz	1000	40±1.5	1.35:1	7-16-f	N-f	376 / 227 / 249	18.2	10009011



Dimensions without connectors
Technical Drawing(s) on next page

STANDARD SPECIFICATIONS

Impedance: 50 Ohm nominal

GENERAL


Ambient Temperature: 0 ... +45 °C
Storage Temperature: -20 ... +85 °C


OPTIONS

Special frequency ranges, attenuation values and RF connectors upon request

Dieses Dokument ist Eigentum der Firma Bonn Elektronik GmbH.
 Vervielfältigung und Veröffentlichung ohne ausdrückliche Genehmigung ist untersagt. Änderungen im
 Sinne des technischen Fortschritts können ohne Vorankündigungen vorgenommen werden. Wenn
 nichts anders angegeben alle Maße in Millimeter.

This document is the property of Bonn Elektronik GmbH.
 Reproduction and release without express permission is strictly prohibited.
 We reserve the right to introduce modifications without prior notification, where they serve
 technical progress. Unless otherwise indicated all dimensions in millimeters.

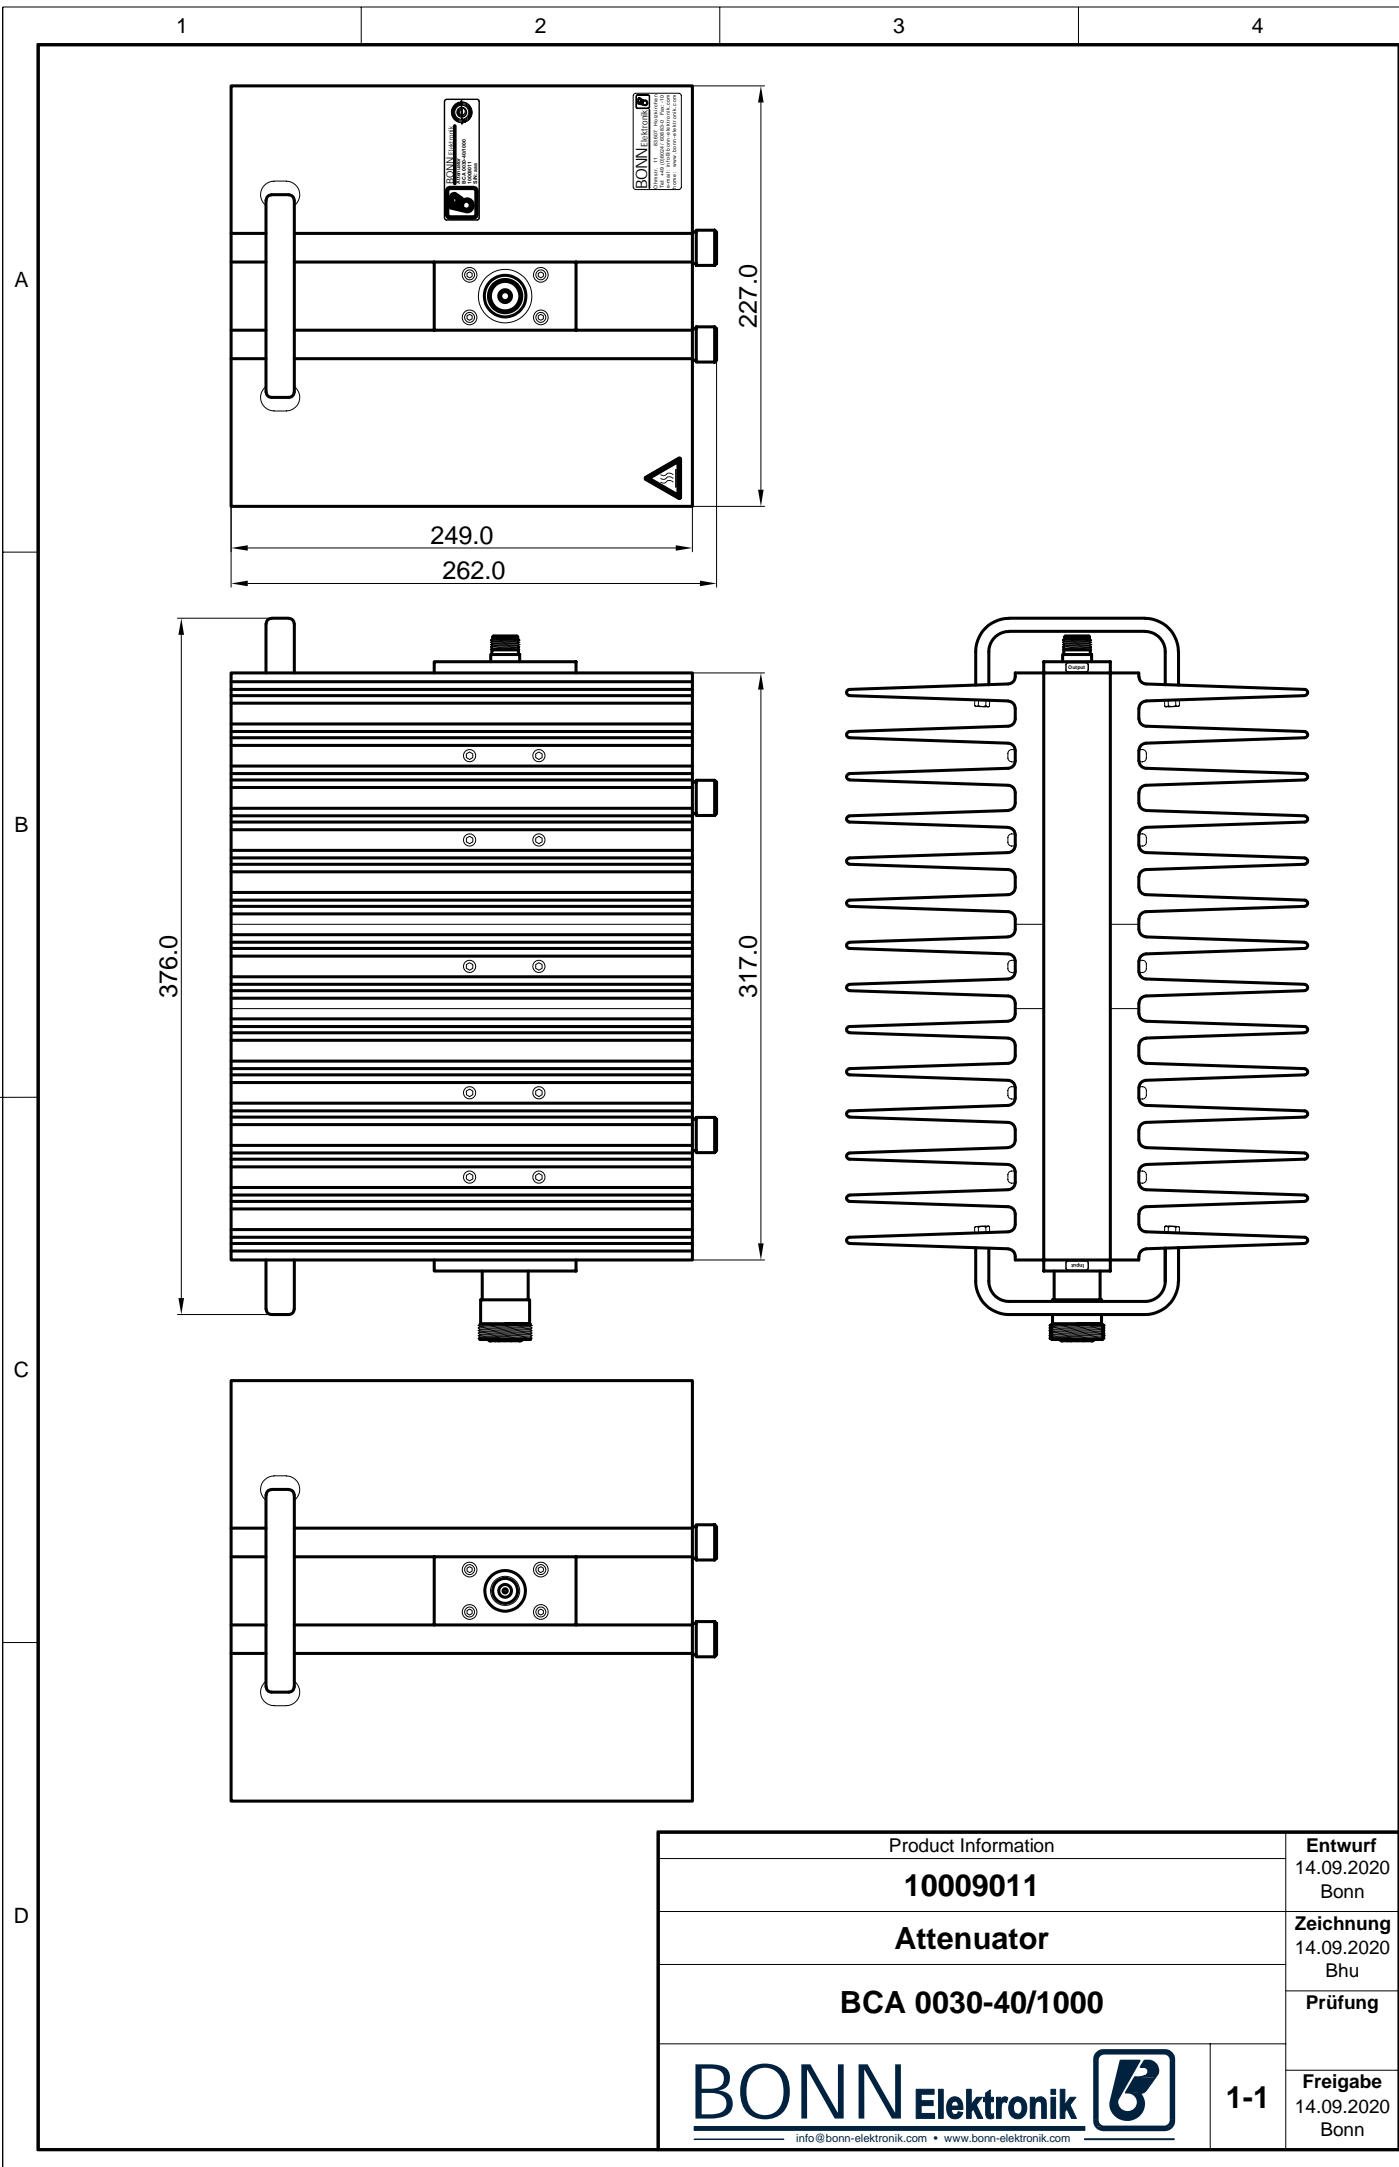

Product Information		Entwurf 14.09.2020 Bonn
10009011		Zeichnung 14.09.2020 Bhu
Attenuator		Prüfung
BCA 0030-40/1000		Freigabe 14.09.2020 Bonn
		1-1
<small>info@bonn-elektronik.com • www.bonn-elektronik.com</small>		