



STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power Pmin W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 1040-20/200	1 ... 4 GHz	20 ±1	200	0.2	20	1.3:1	N-f	SMA-f

S: Single directional coupler

OPTIONS

- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

A

B

C




D

1

2

3

4

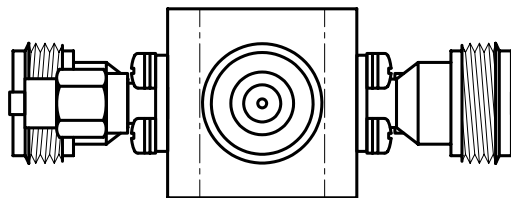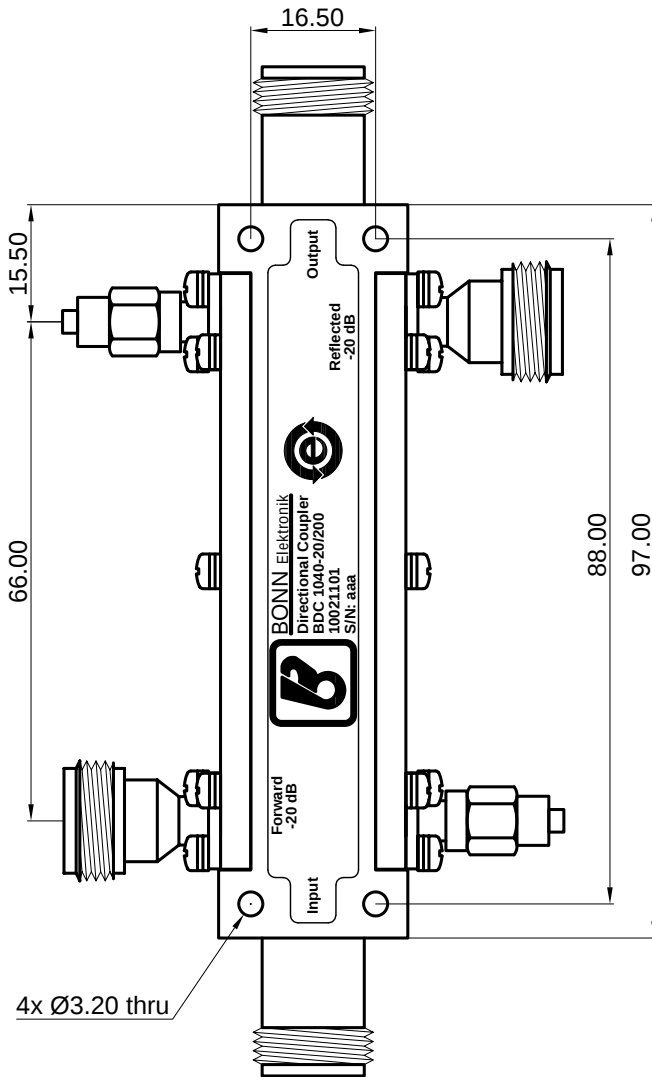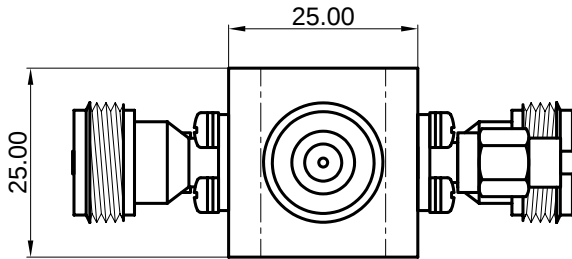

Product Information		Entwurf
10021101		21.06.2021 Bonn
Directional Coupler		Zeichnung 21.06.2021 Bhu
BDC 1040-20/200		Prüfung
BONN Elektronik 		Blatt 1-1 Freigabe 21.06.2021 Bonn
info@bonn-elektronik.com • www.bonn-elektronik.com		