



STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power Pmin W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 2018-40/400	2 ... 18 GHz	40 ±2.4	400	0.5	10	1.4:1	N-m	N-f

S: Single directional coupler

OPTIONS

- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

A

B

C


D

1

2

3

4

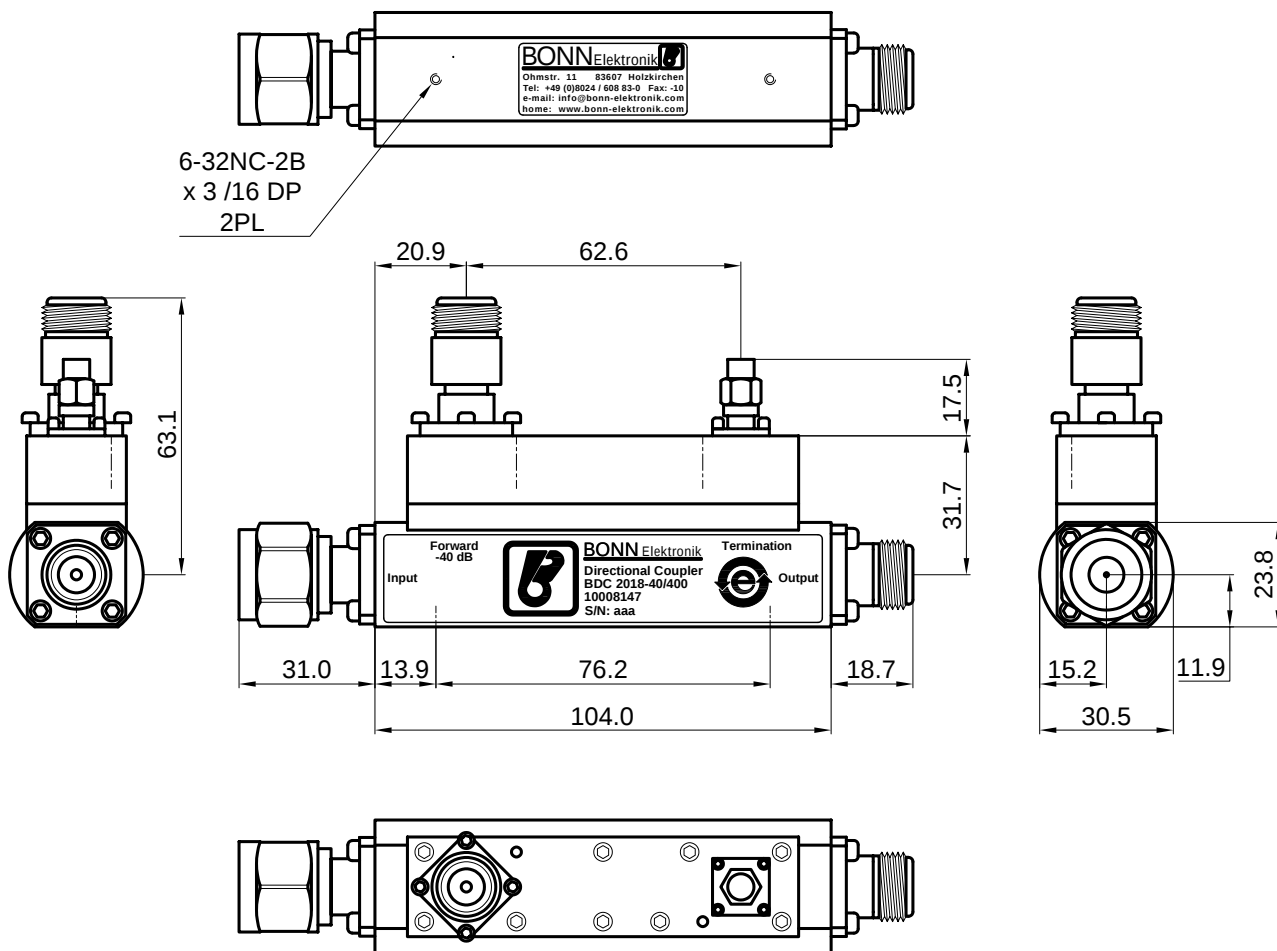

Product Information		Entwurf
10008147		09.02.18 Bonn
Directional Coupler		Zeichnung
BDC 2018-40/400		09.02.18 Bhu
BONN Elektronik  info@bonn-elektronik.com • www.bonn-elektronik.com		Prüfung
		Freigabe
1-1		09.02.18 Bonn


A

B

C

D

1 2 3 4

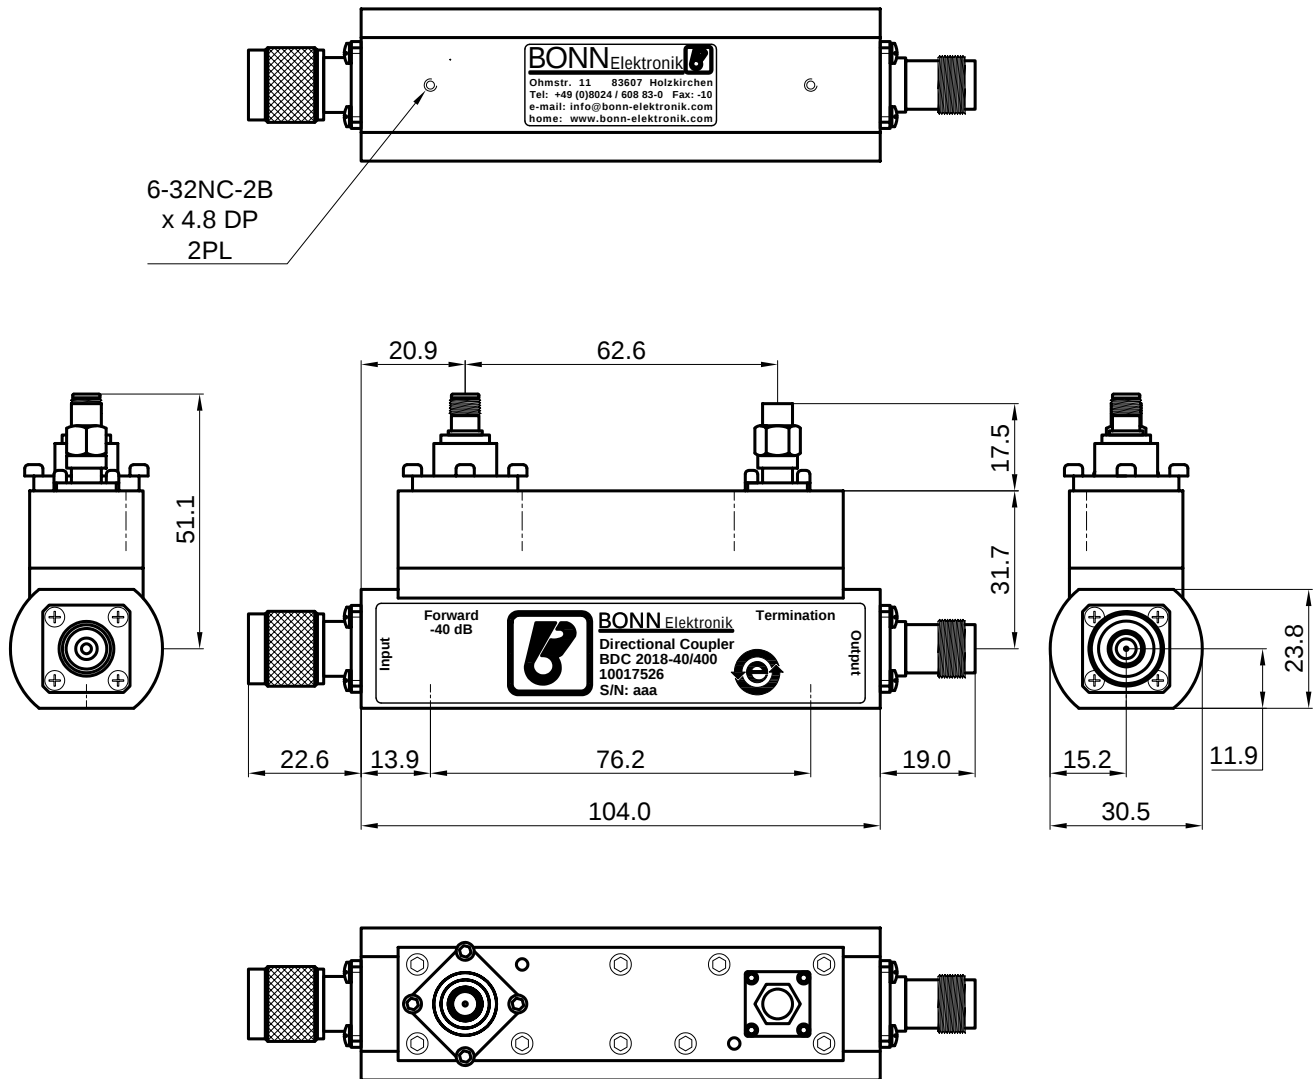

Product Information		Entwurf
10017526		07.01.19 Bonn
Directional Coupler		Zeichnung 07.01.19 Bhu
BDC 2018-40/400		Prüfung
BONN Elektronik 		Freigabe 07.01.19 Bonn
info@bonn-elektronik.com • www.bonn-elektronik.com		1-1