

STANDARD MODELS


Model	Frequency Range X)	Coupling X) dB	Power P _{min} W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 6018-50/300	6 ... 18 GHz	50 ±1	300	0.3	10	1.5:1	N-f	SMA-f

S: Single directional coupler

OPTIONS

- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

This document is the property of Bonn Elektronik GmbH.
 Reproduction and release without express permission is strictly prohibited.
 We reserve the right to introduce modifications without prior notification, where they serve
 technical progress. Unless otherwise indicated all dimensions millimeters

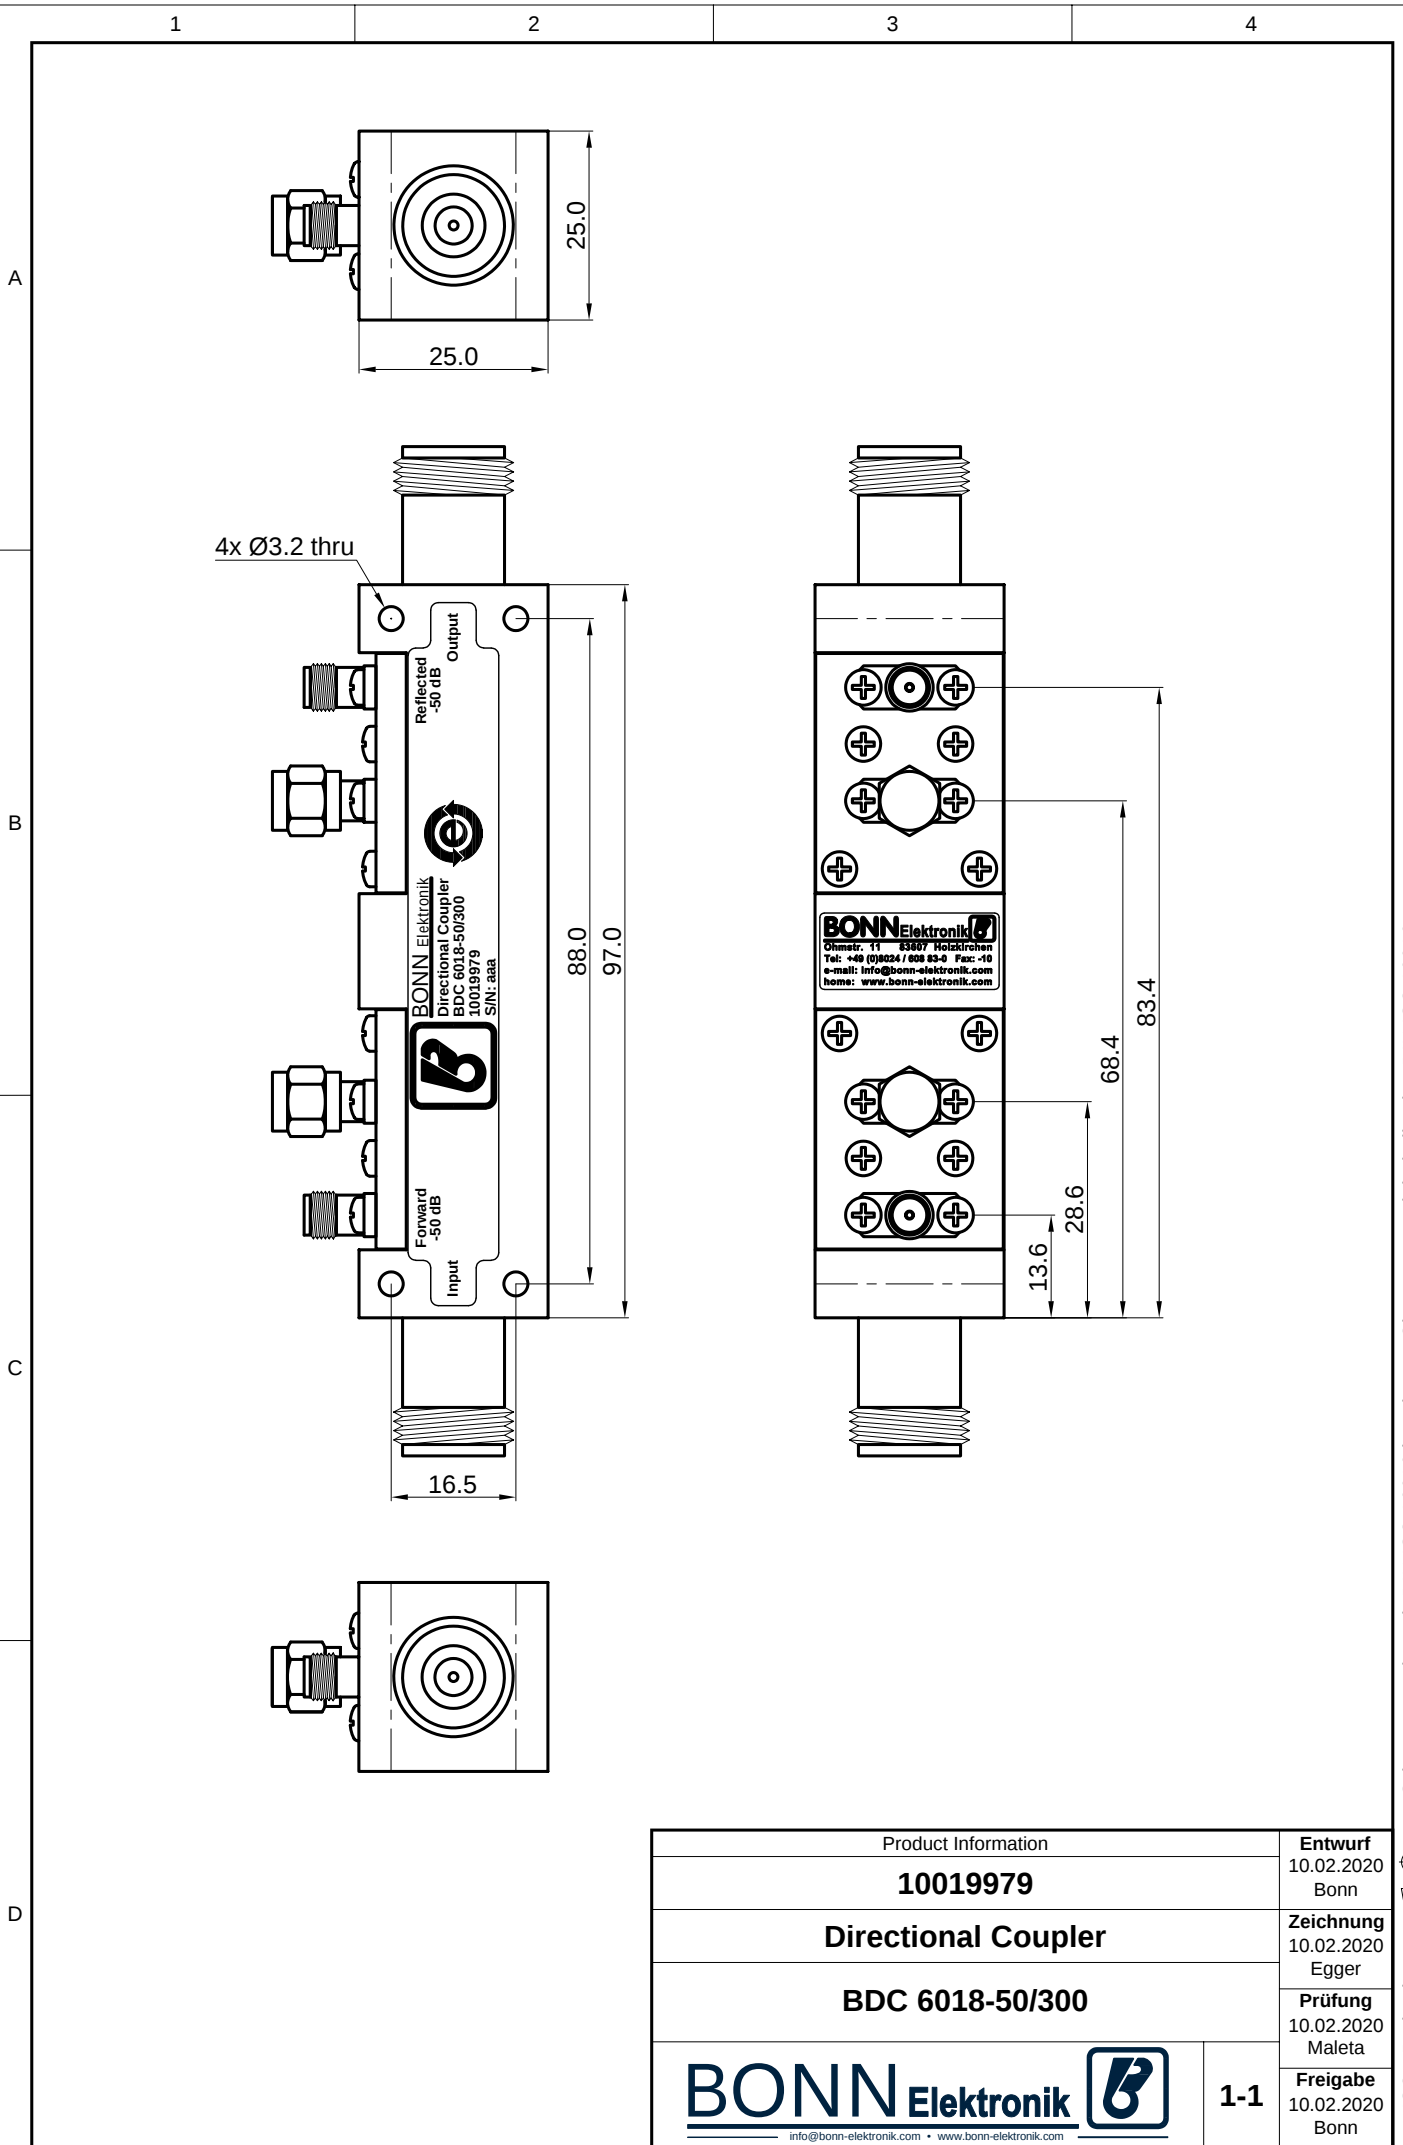

A

B

C


D

1

2

3

4

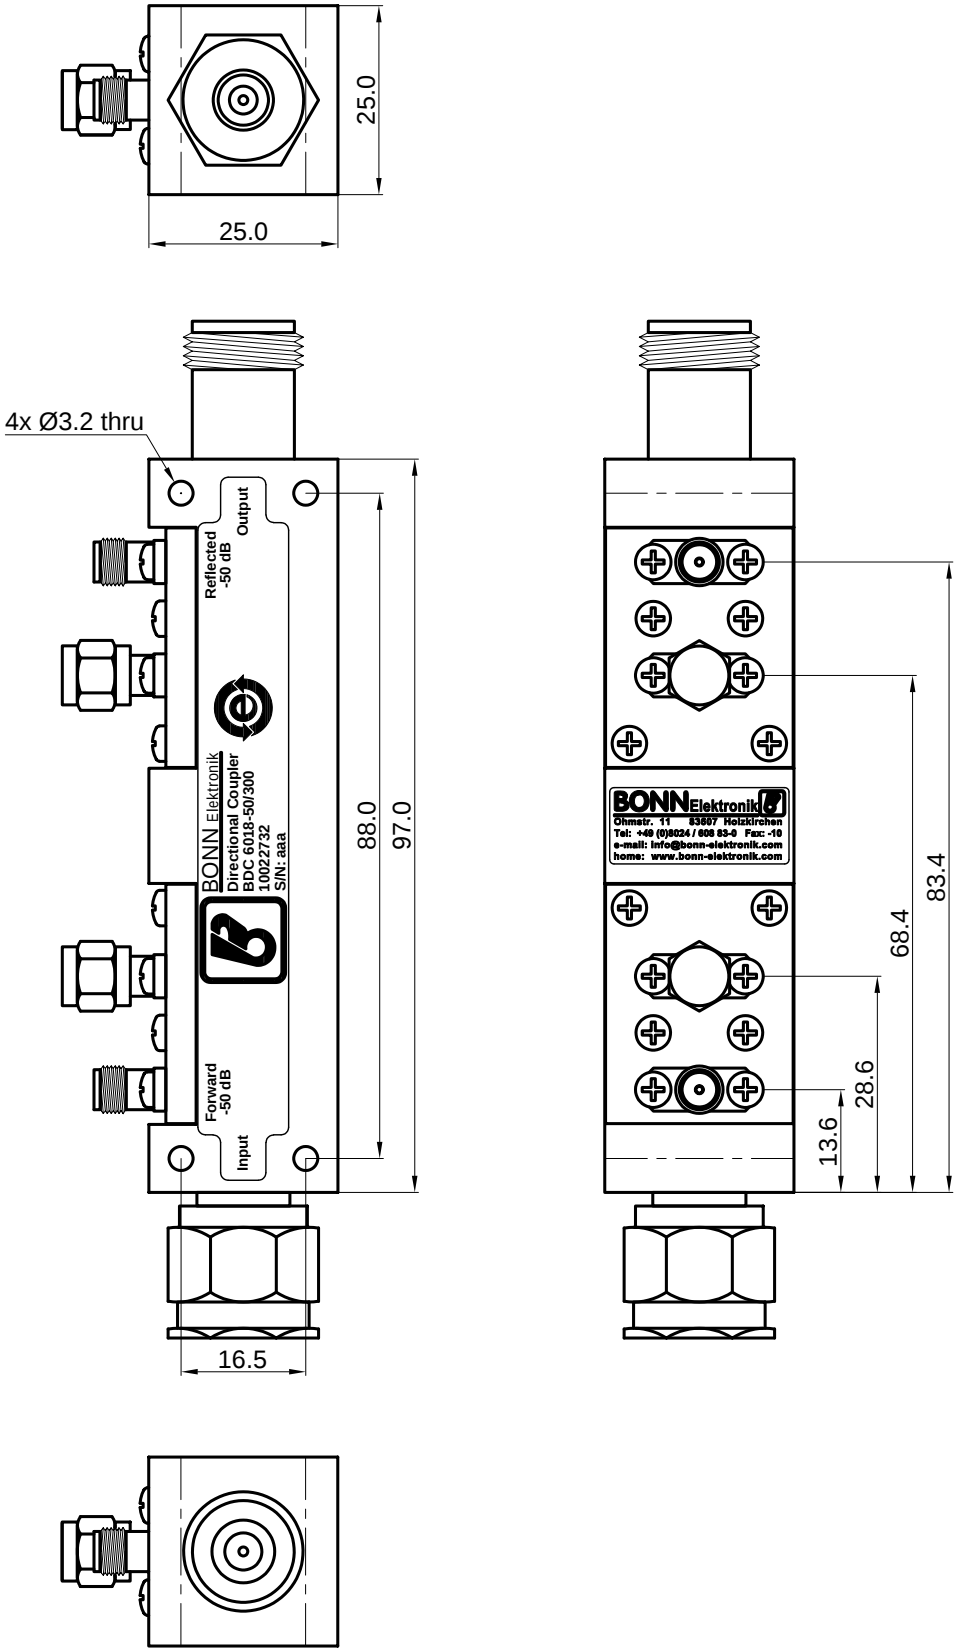

Product Information		Entwurf
10022732		25.10.2021 Bonn
Directional Coupler		Zeichnung 25.10.2021 Bhu
BDC 6018-50/300		Prüfung
BONNElektronik info@bonn-elektronik.com • www.bonn-elektronik.com		Blatt 1-1 Freigabe 26.10.2021 Bonn