



STANDARD MODELS


Model	Frequency Range X)	Coupling X) dB	Power P _{min} W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 2010-20/200	200 ... 1000 MHz	20 ±1.75	200	0.2	20	1.20:1	SMA-f	SMA-f

S: Single directional coupler


OPTIONS

- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

A

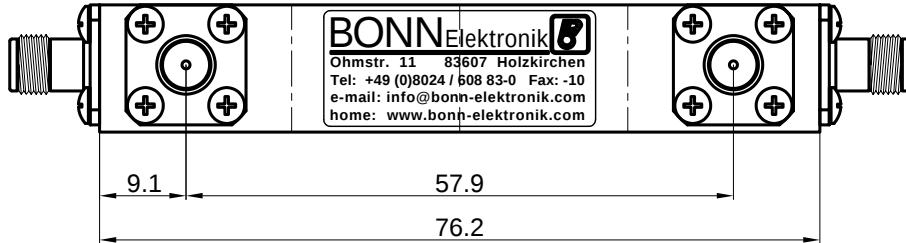

B

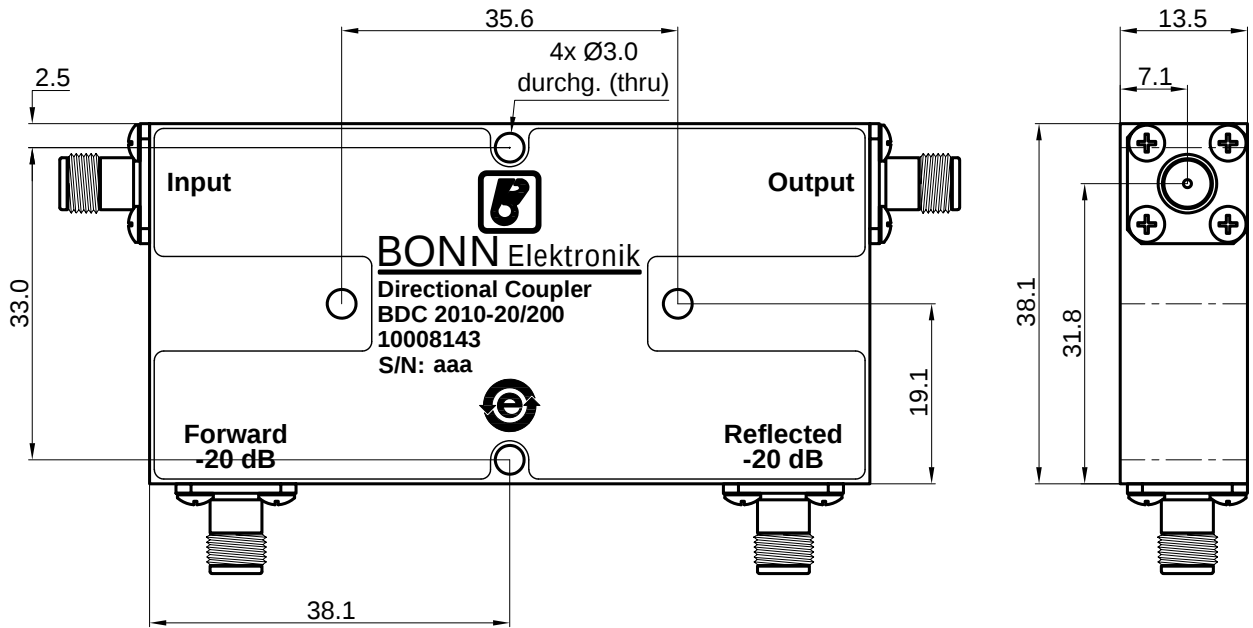

C

D

Product Information		Entwurf
10008143		04.02.19 Bonn
Directional Coupler		Zeichnung 04.02.19 Bhu
BDC 2010-20/200		Prüfung
BONN Elektronik 		Freigabe 05.02.19 Bonn
1-1		