



STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power Pmin W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 4018-30/30S	4 ... 18 GHz	30 ±2.5	30	1	10	1.6:1	SMA-f	SMA-f

S: Single directional coupler

OPTIONS

- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

A

B

C


D

1

2

3

4

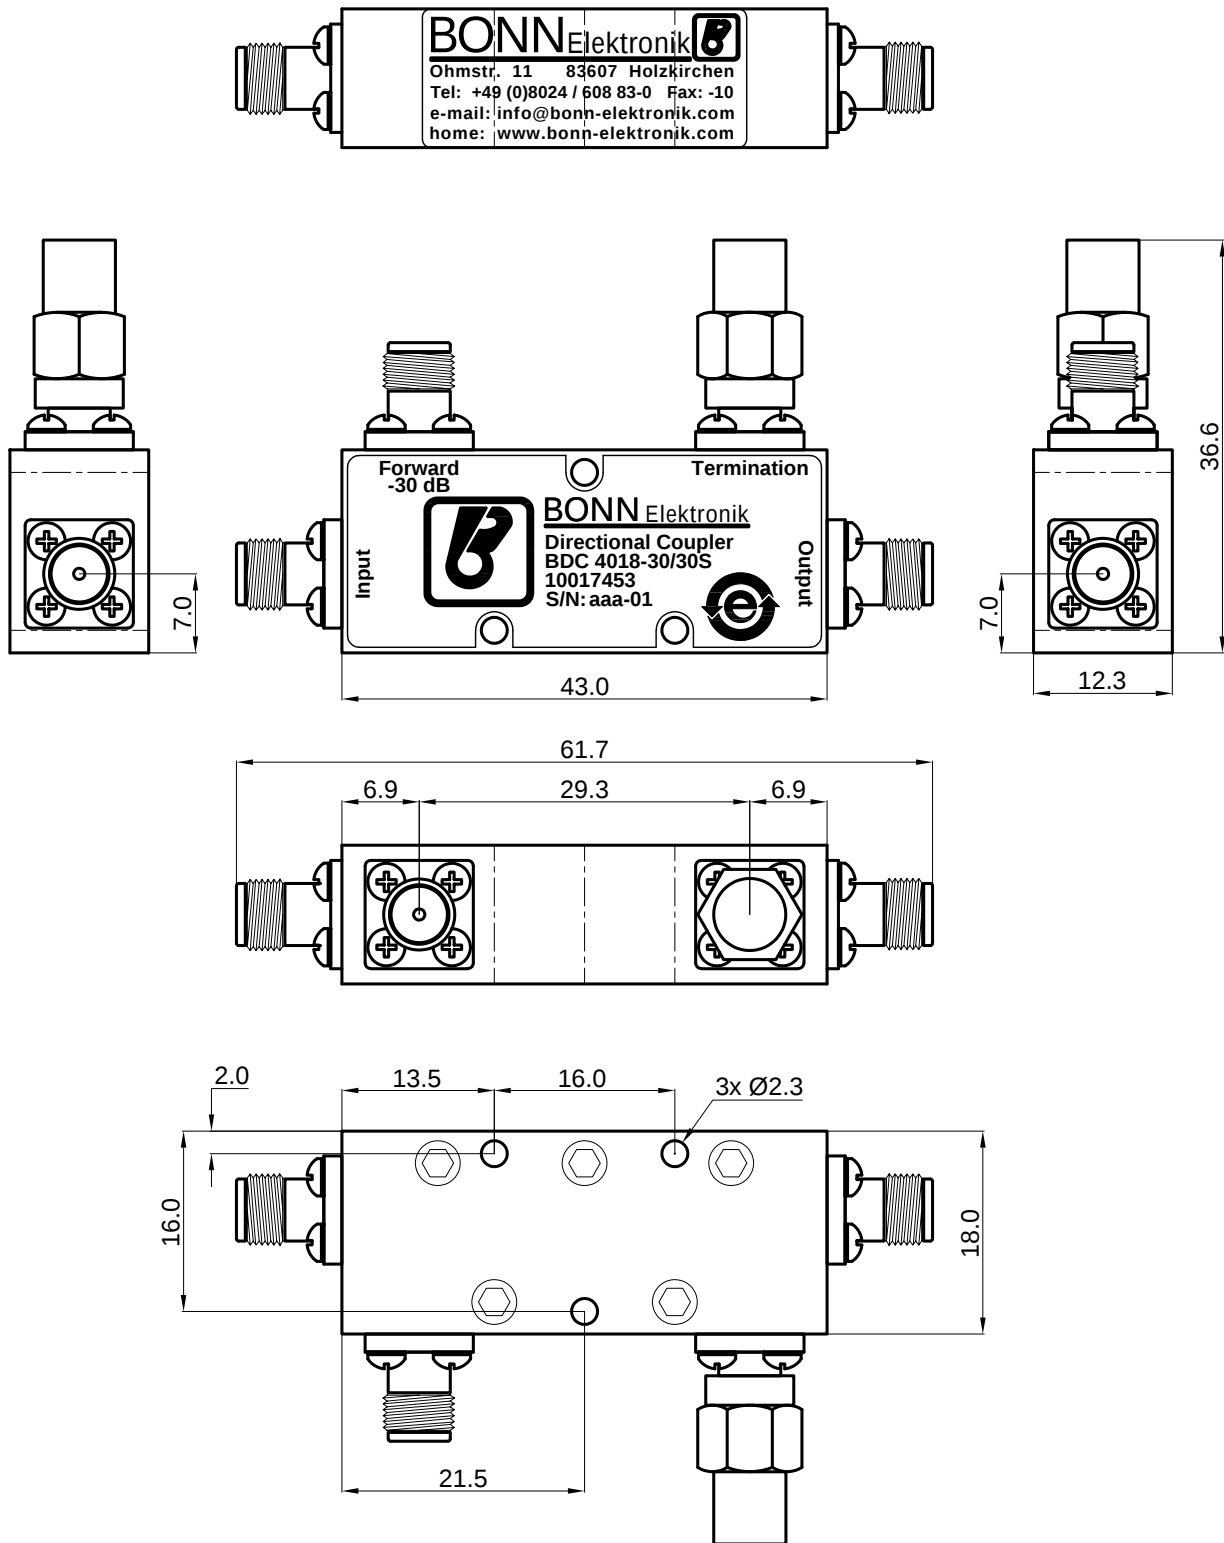

Product Information		Entwurf
10017453		18.09.18 Bonn
Directional Coupler		Zeichnung
BDC 4018-30/30S		18.09.18 Bhu
		Prüfung
BONN Elektronik 		Freigabe
info@bonn-elektronik.com • www.bonn-elektronik.com		18.09.18 Bonn
1-1		