



STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power Pmin W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 0260-20/200	0.2 ... 6 GHz	20 ±3.25	200	1.1	14	1.4:1	SMA-f	SMA-f

S: Single directional coupler

OPTIONS

- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

1

2

3


4

A

B

C

D

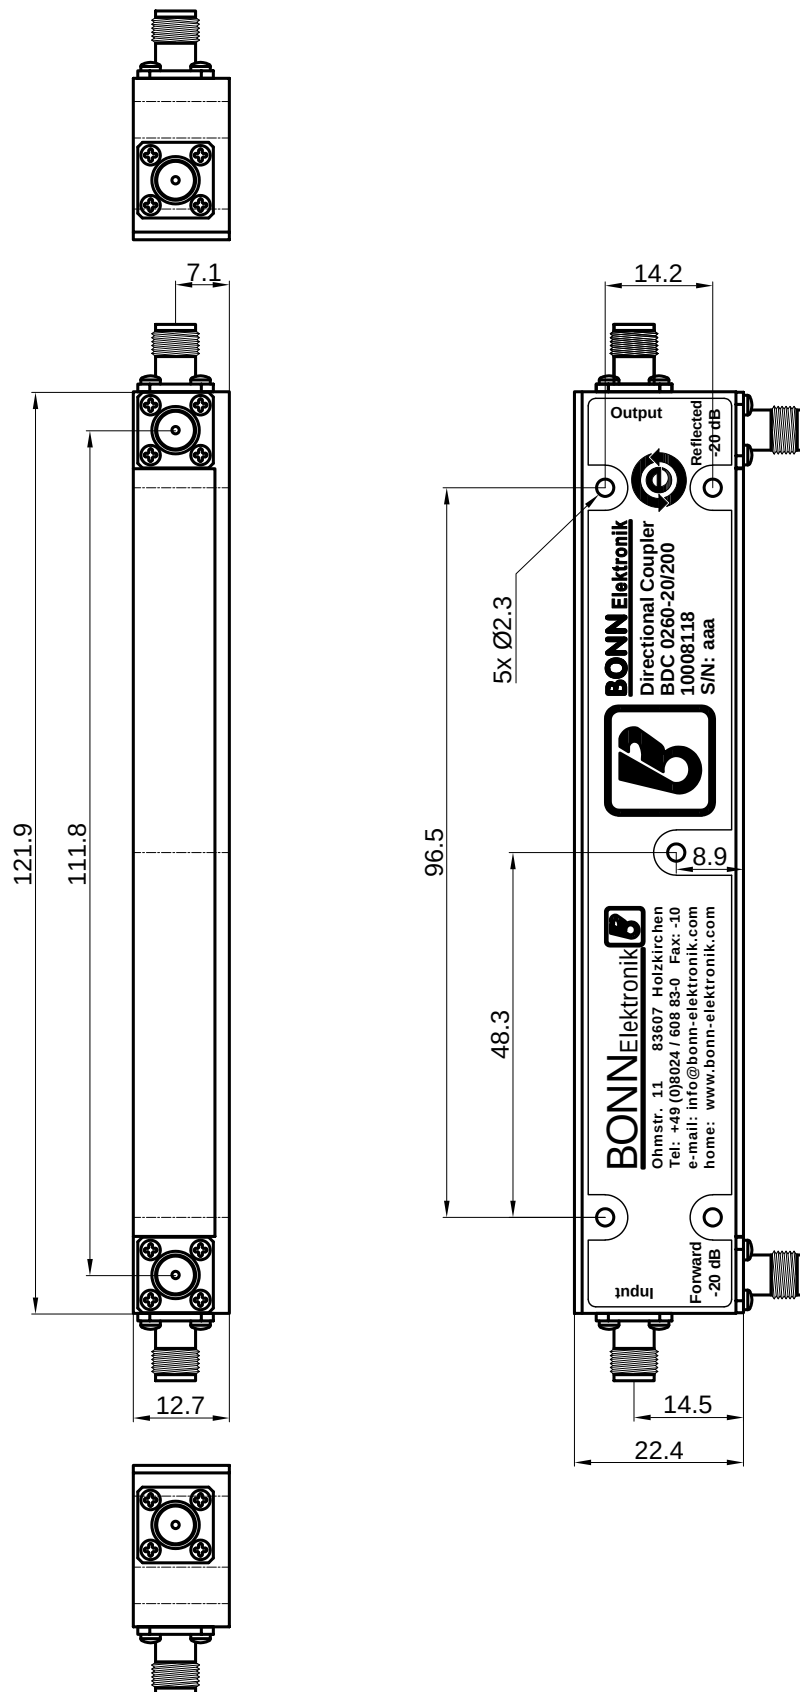

CAD - Blöcke

10008118

Directional Coupler

Werlatone
C8060-102

Entwurf

Zeichnung

Prüfung

Freigabe

R1D	RoHs hinzu	01.04.2022	Egger
R1C	Input u. Output text position in Schilder	12.08.2021	Bhu
R1B	Ansicht berichtigt	28.07.17	Egger
R1A	Erstellung	11.04.12	Fröhlich

Rev.	Änderungsgrund	Datum	Name
------	----------------	-------	------

BONNELEKTRONIK
info@bonn-elektronik.com • www.bonn-elektronik.com