



STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power P _{min} W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 0660-30/100	0.6 ... 6 GHz	30 ±2	100	0.4	15	1.25:1	SMA-f	SMA-f

S: Single directional coupler

OPTIONS

- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request


A

B

C

D

1234

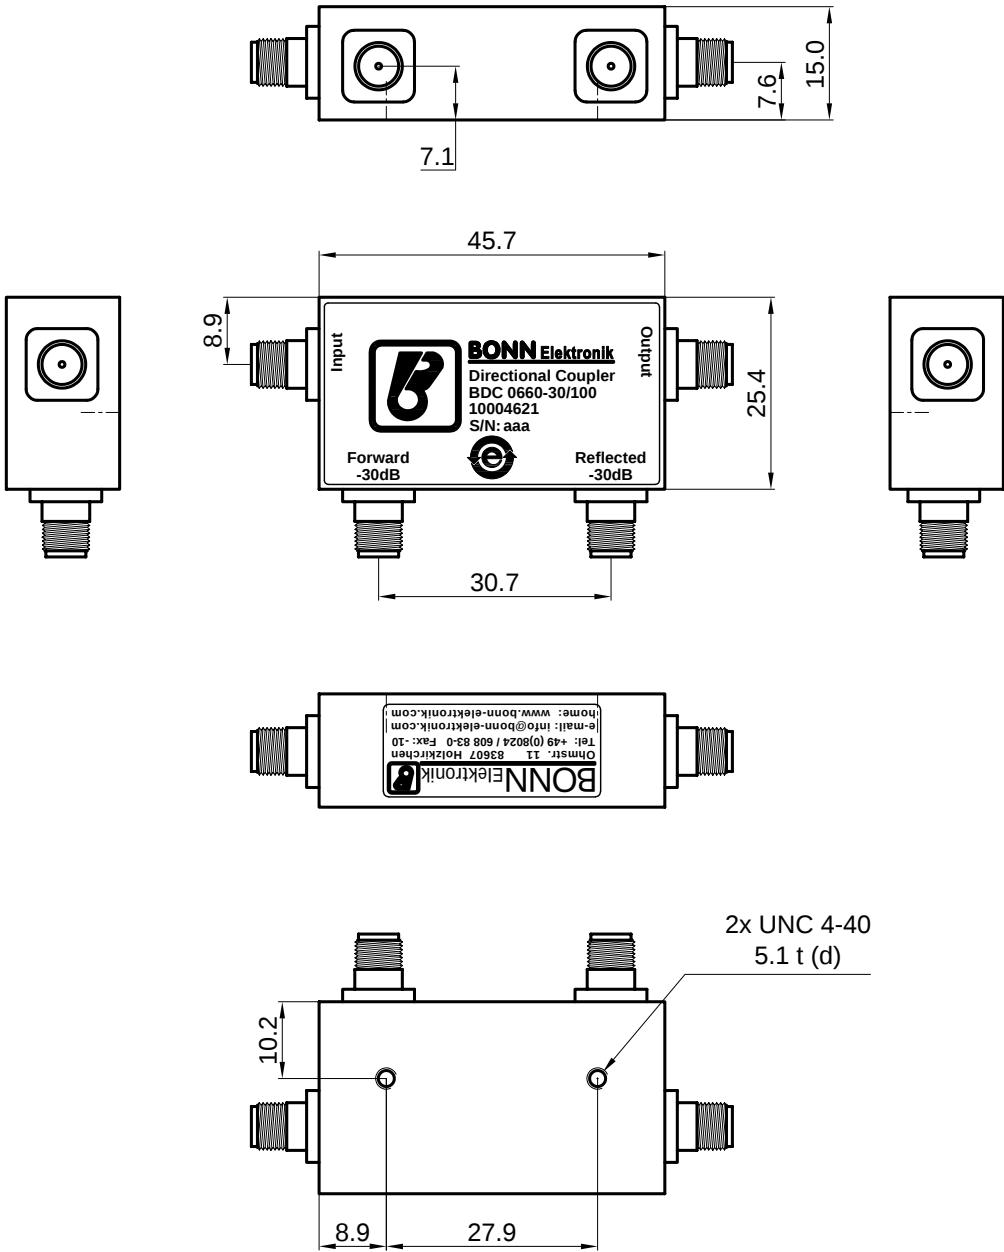

Product Information		Entwurf
10004621		03.05.2017 Bonn
Directional Coupler		Zeichnung 03.05.2017 Fröhlich
BDC 0660-30/100		Prüfung
BONN Elektronik		Blatt 1-1
info@bonn-elektronik.com • www.bonn-elektronik.com		Freigabe 22.01.2018 Bonn