



STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power Pmin W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 0330-20/100	0.3 ... 3 GHz	20 ±2.2	100	0.35	15	1.2:1	N-f	SMA-f


S: Single directional coupler

OPTIONS


- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

This document is the property of Bonn Elektronik GmbH.
 Reproduction and release without express permission is strictly prohibited.
 We reserve the right to introduce modifications without prior notification, where they serve
 technical progress. Unless otherwise indicated all dimensions millimeters



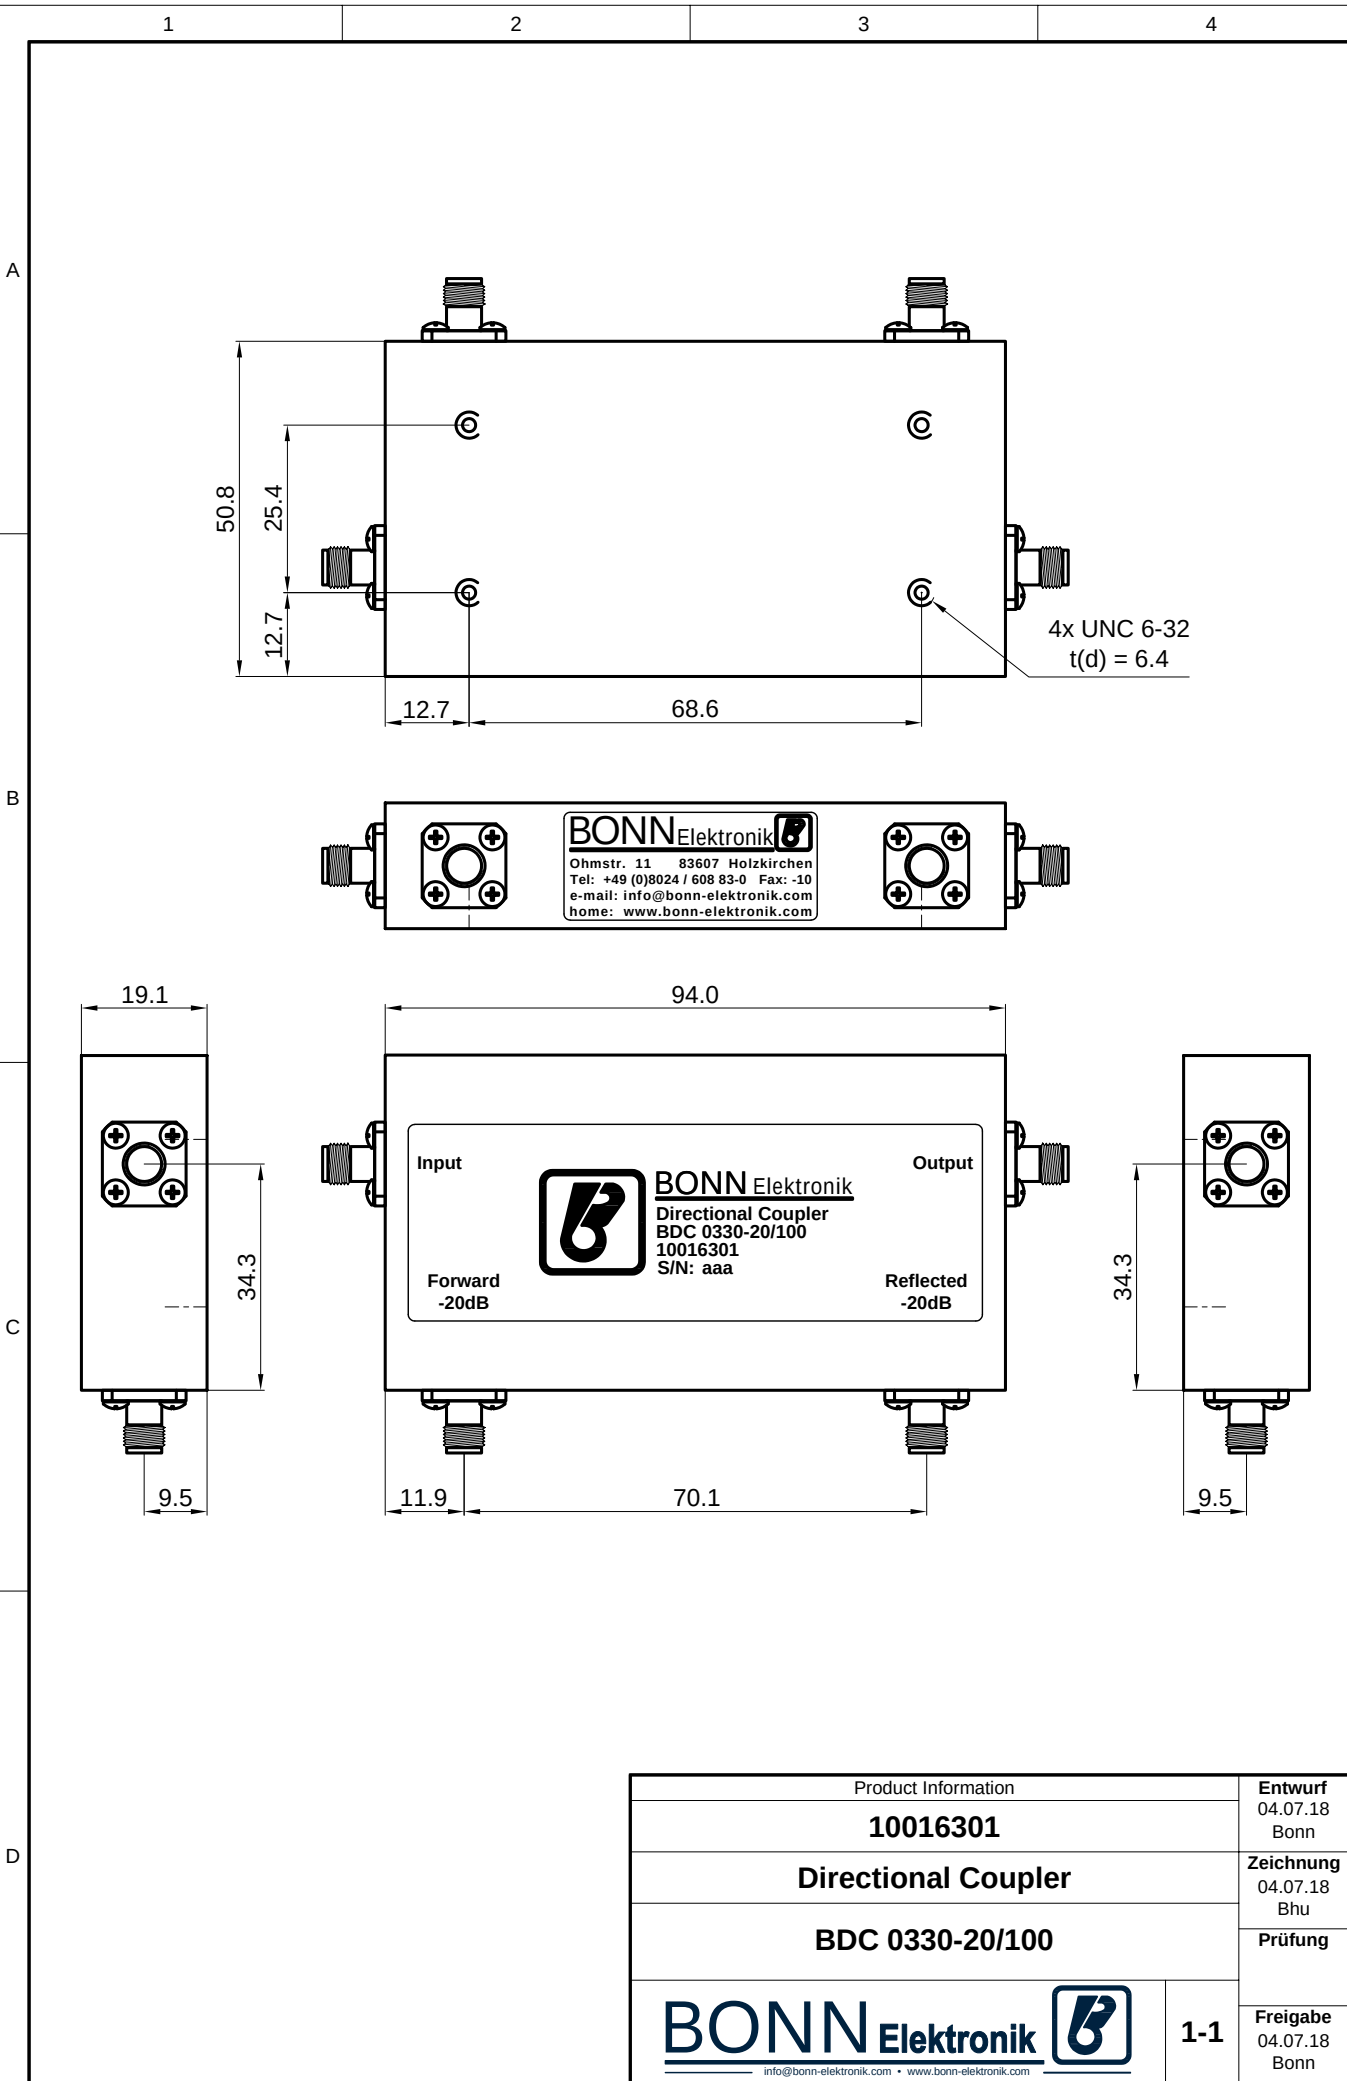

Product Information		Entwurf
10016301		04.07.18 Bonn
Directional Coupler		Zeichnung
BDC 0330-20/100		04.07.18 Bhu
		Prüfung
BONN Elektronik 		Freigabe
1-1		04.07.18 Bonn

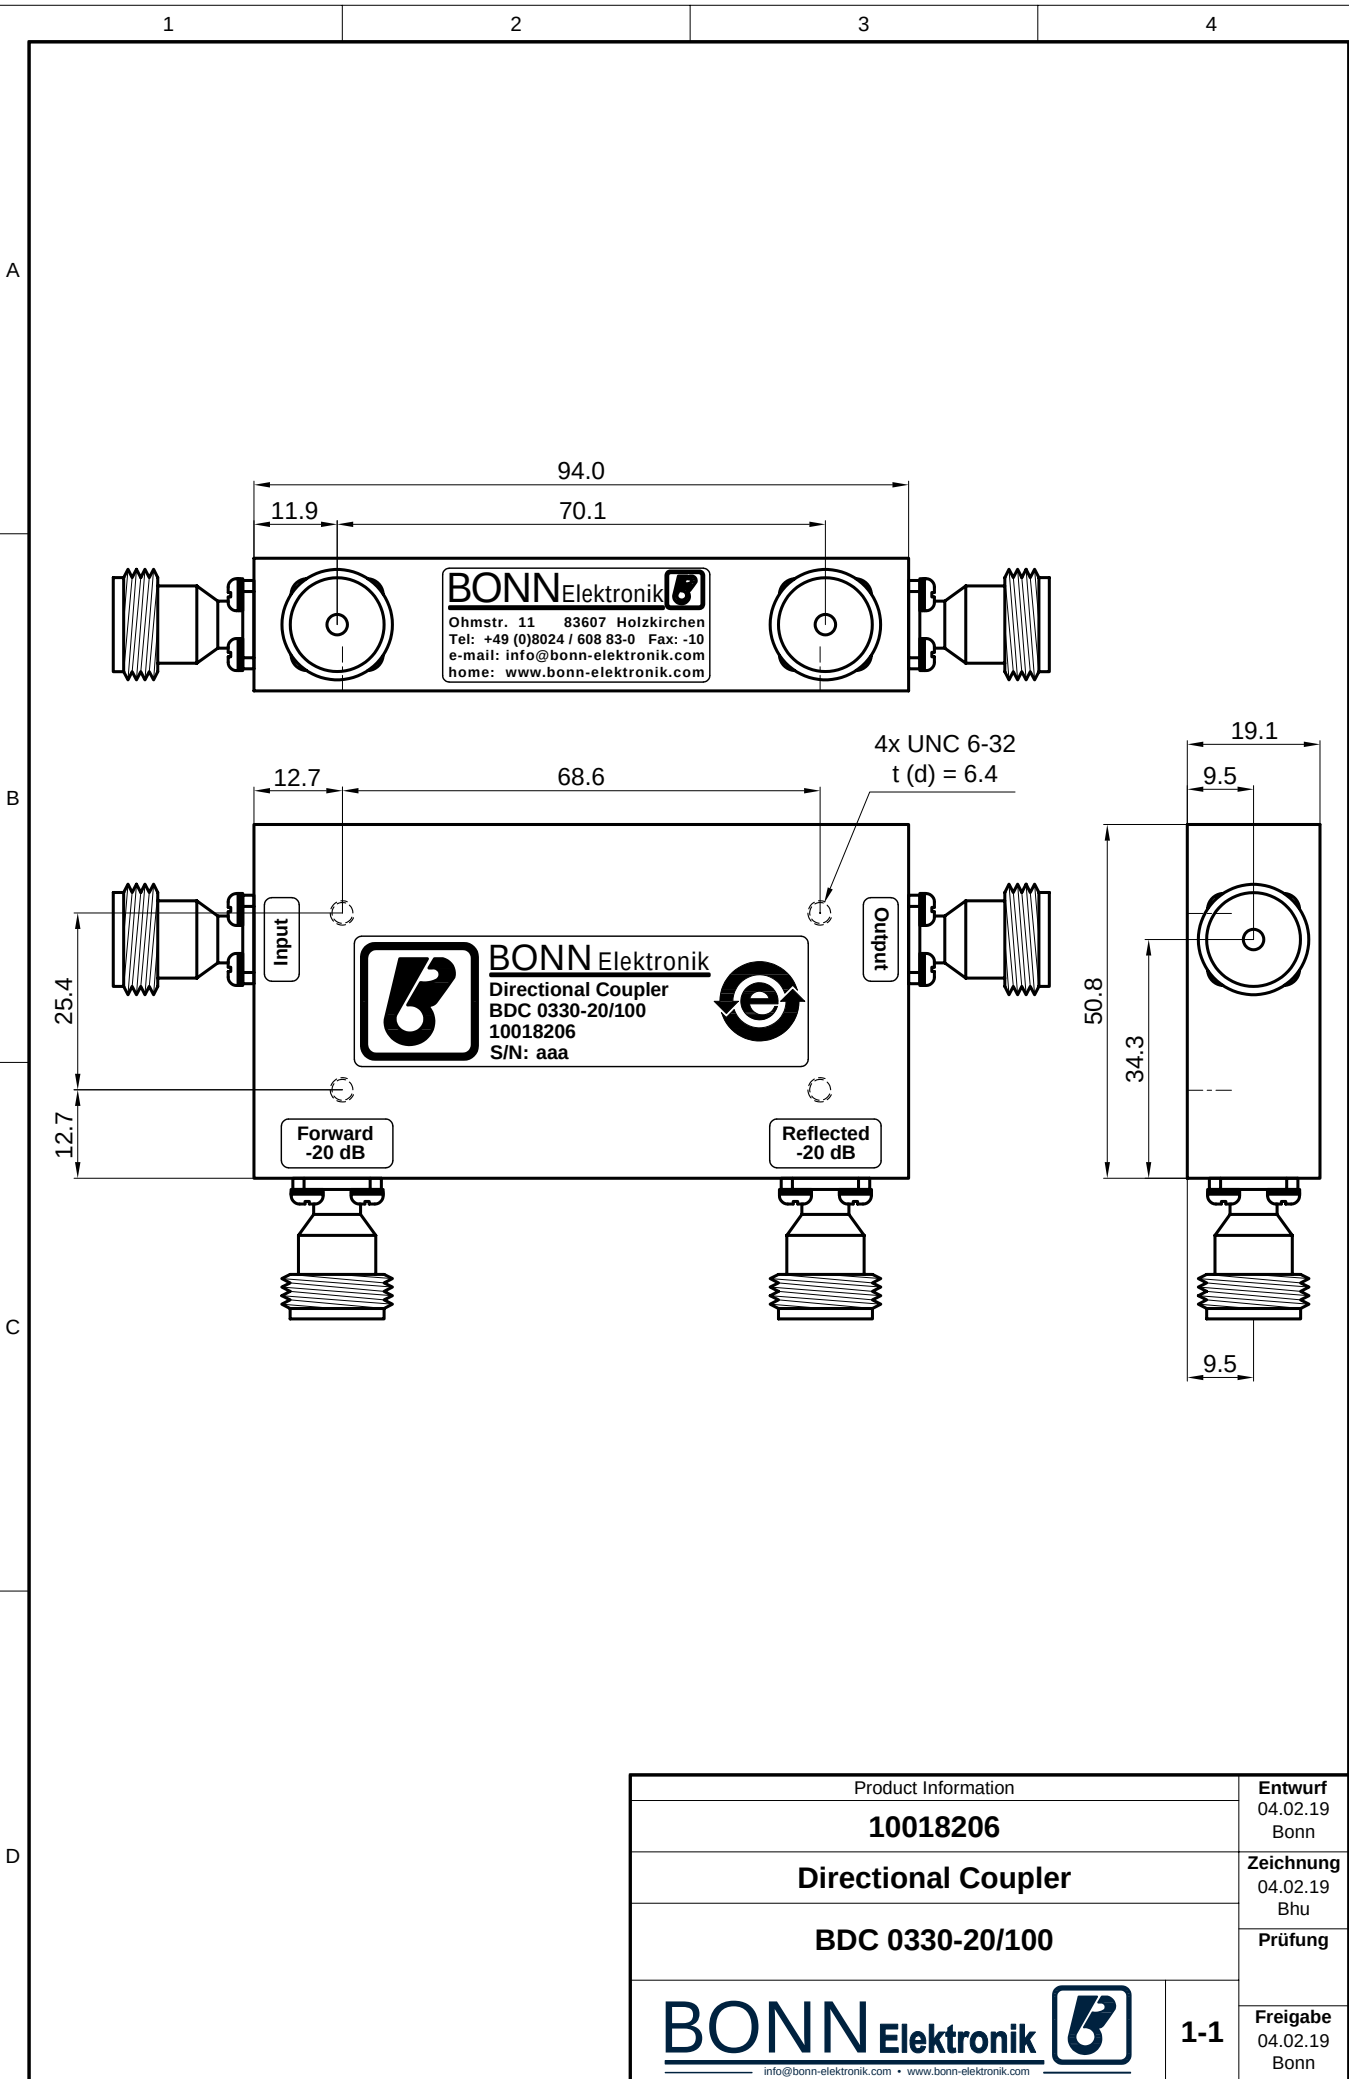

Product Information		Entwurf
10018206		04.02.19 Bonn
Directional Coupler		Zeichnung
BDC 0330-20/100		04.02.19 Bhu
		Prüfung
BONN Elektronik 		Freigabe
1-1		04.02.19 Bonn