




STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power Pmin W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 1001-50/1200	10 ... 175 MHz	50 ±1.25	1200	0.1	20	1.1:1	N-f	SMA-f

S: Single directional coupler

OPTIONS

- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

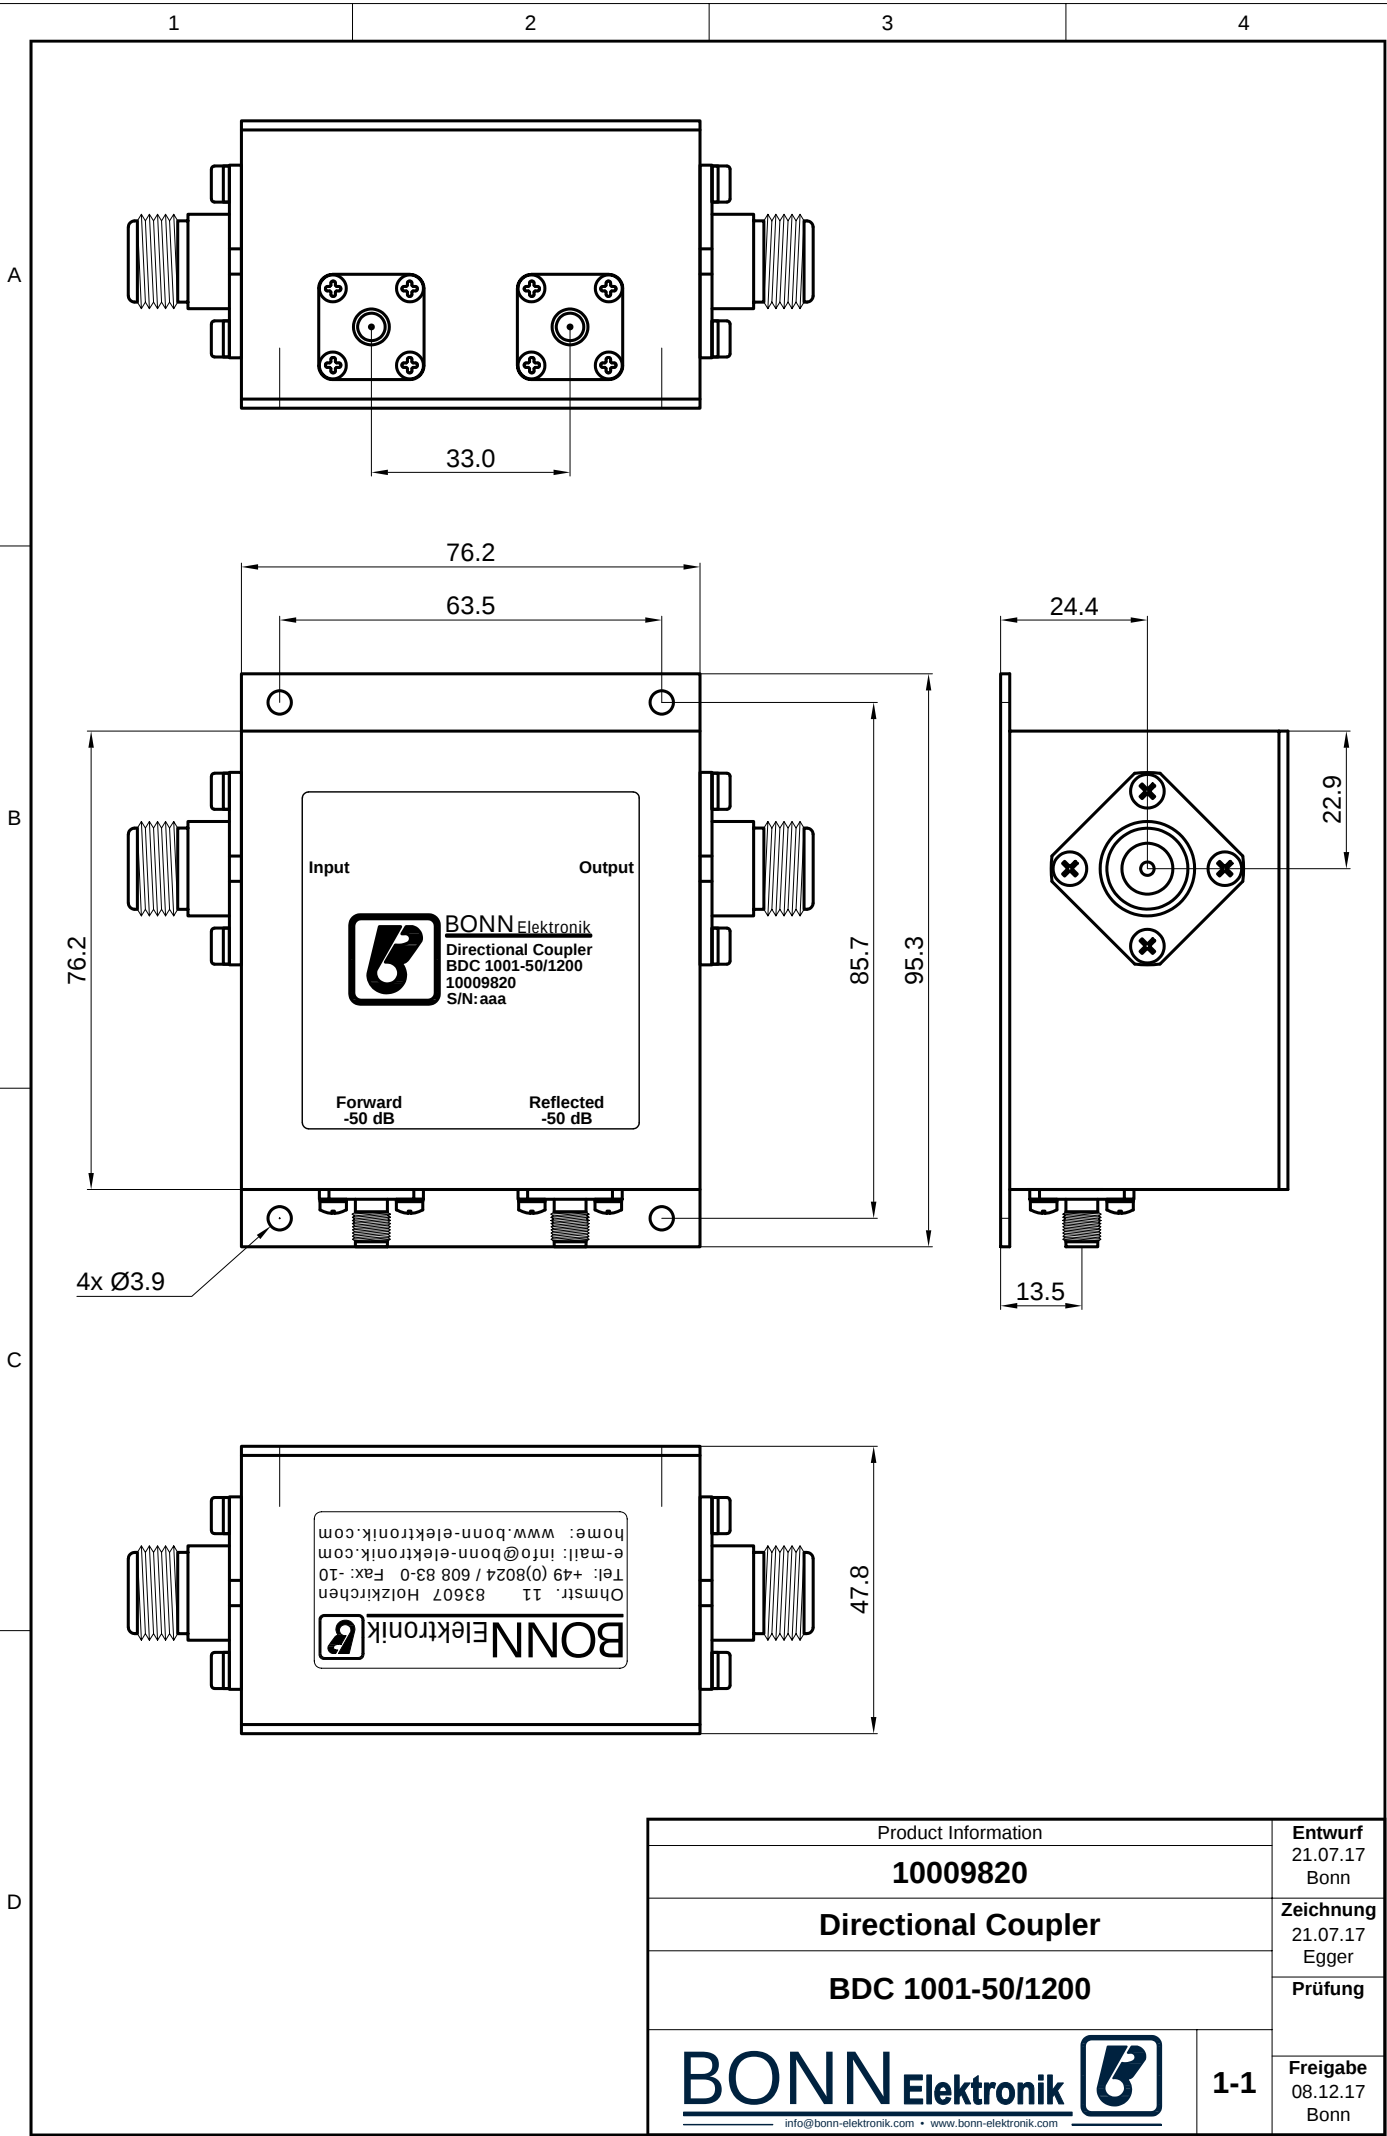

Product Information		Entwurf
10009820		21.07.17 Bonn
Directional Coupler		Zeichnung
BDC 1001-50/1200		21.07.17 Egger
BONN Elektronik  info@bonn-elektronik.com • www.bonn-elektronik.com		Prüfung
		Freigabe
1-1		08.12.17 Bonn