

STANDARD MODELS


Model	Frequency Range X)	Coupling X) dB	Power P _{min} W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 2080-30/500	2 ... 8 GHz	30 ±1	500	0.2	21	1.3:1	N-f	SMA-f

S: Single directional coupler


OPTIONS

- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request


A

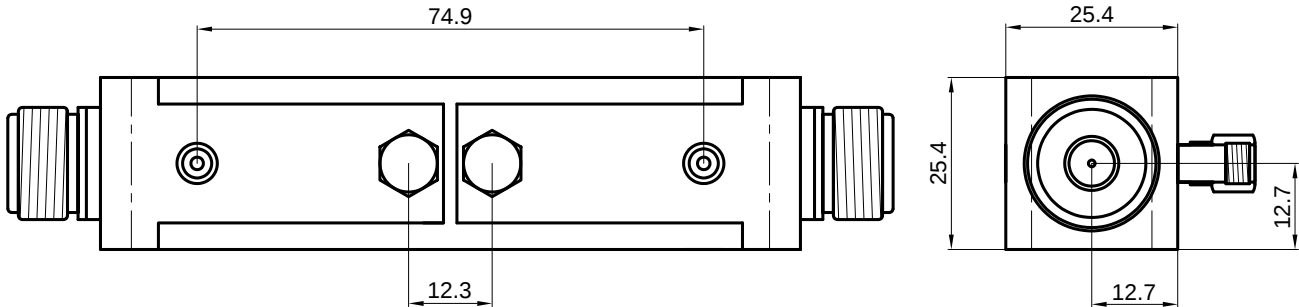

B

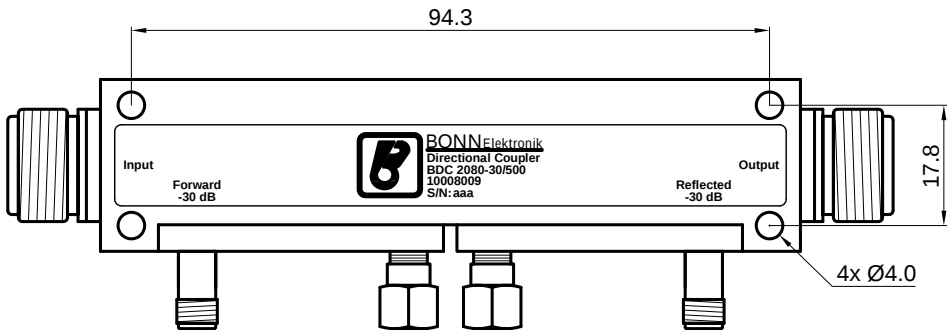

C

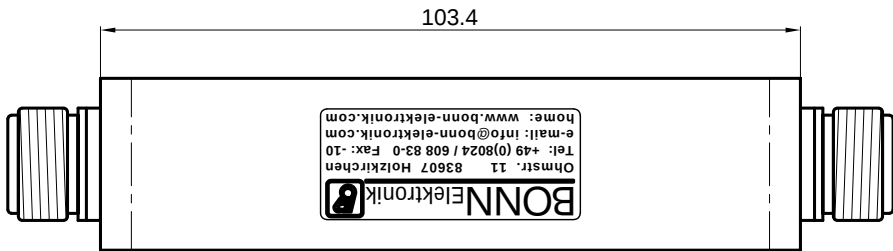

D

Product Information		Entwurf
10008009		24.07.17 Bonn
Directional Coupler		Zeichnung
BDC 2080-30/500		24.07.17 Egger
BONNElektronik  info@bonn-elektronik.com • www.bonn-elektronik.com		Prüfung
		Freigabe
1-1		08.01.18 Bonn