




STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power P _{min} W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 0580-30/20S	0.5 ... 8 GHz	30 ±1.3	20	0.7	18	1.3:1	SMA-f	SMA-f

S: Single directional coupler

OPTIONS

- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

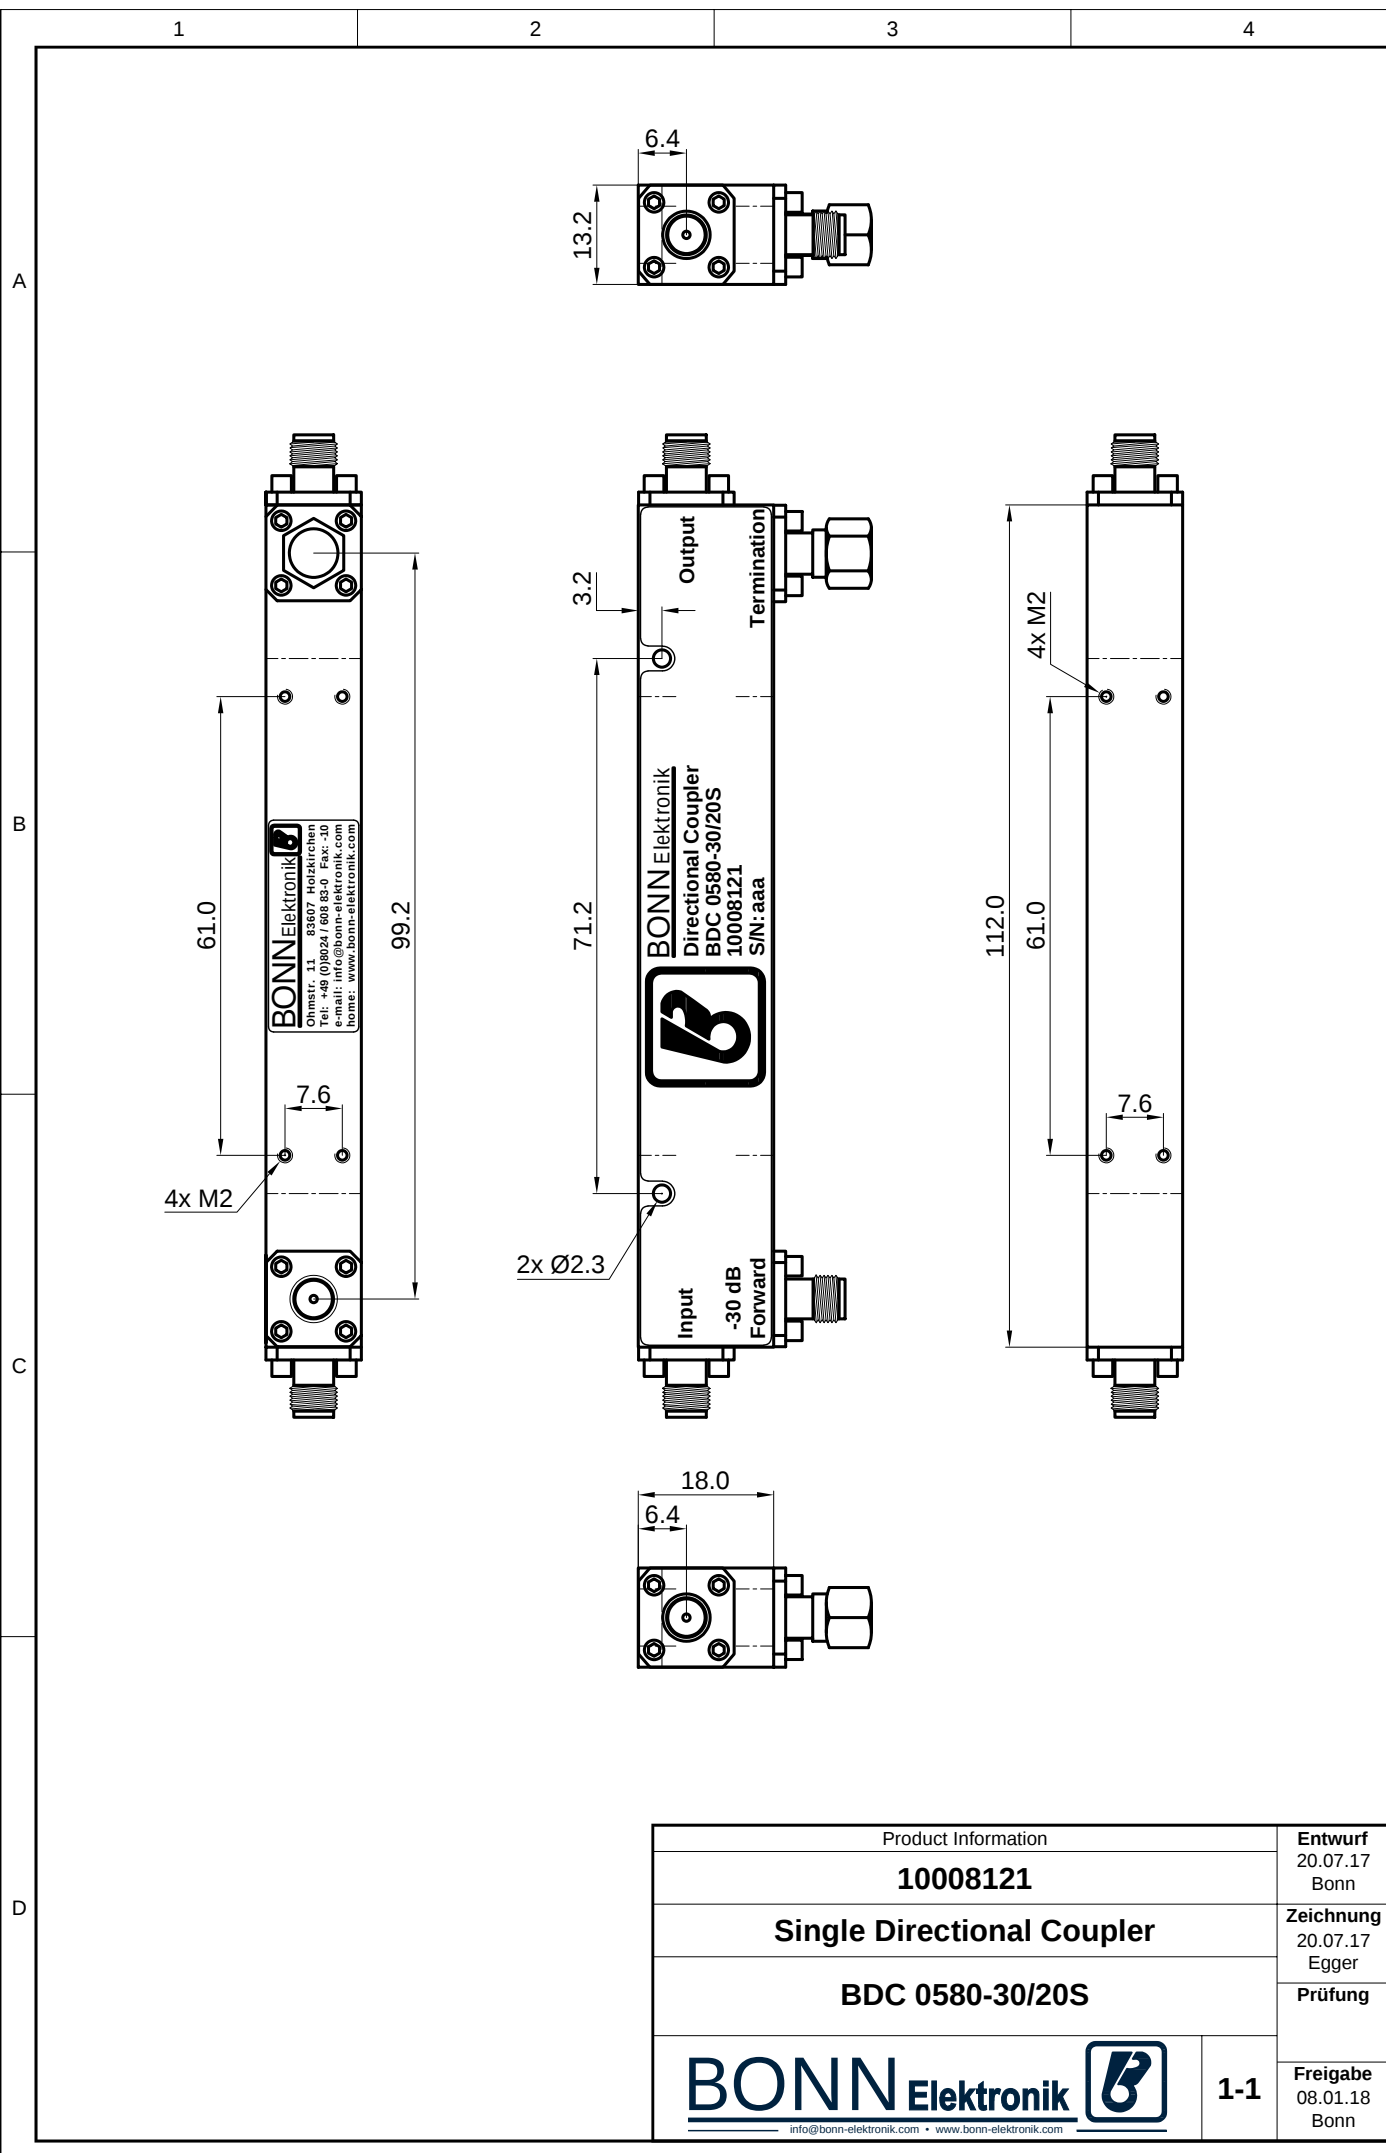

Product Information		Entwurf 20.07.17 Bonn
10008121		
Single Directional Coupler		Zeichnung 20.07.17 Egger
BDC 0580-30/20S		
BONN Elektronik 		Prüfung
		Freigabe 08.01.18 Bonn
info@bonn-elektronik.com • www.bonn-elektronik.com		1-1