



STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power P _{min} W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 0100-43/1000	9 kHz ... 1000 MHz	43 ±1.5	1000	0.45	20	1.3:1	7-16-f	SMA-f

S: Single directional coupler

OPTIONS




- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

A

B

C

D

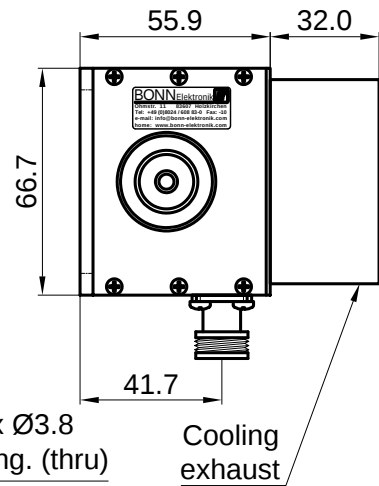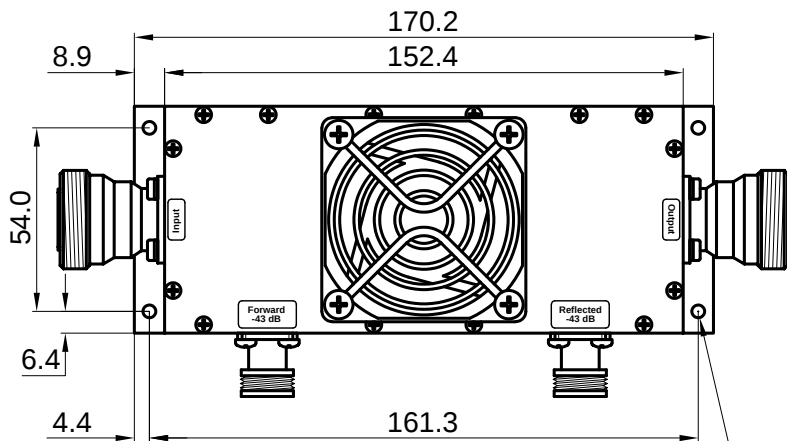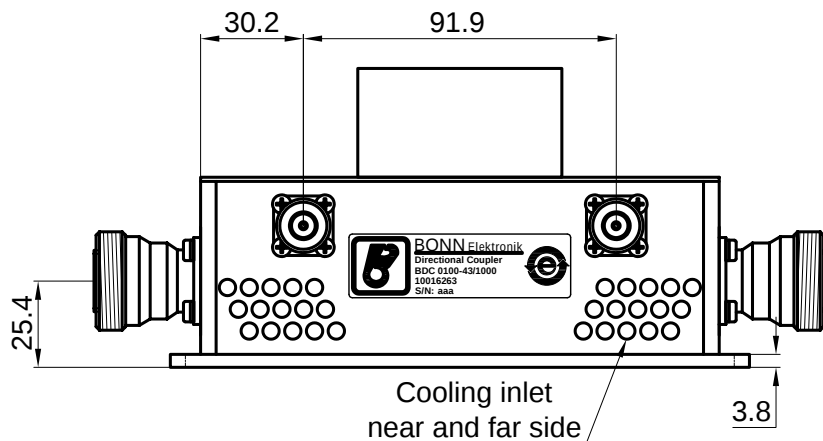

Product Information		Entwurf
10016263		13.09.18 Bonn
Directional Coupler		Zeichnung
BDC 0100-43/1000		13.09.18 Bhu
BONN Elektronik		Prüfung
1-1		Freigabe
info@bonn-elektronik.com • www.bonn-elektronik.com		13.09.18 Bonn