



STANDARD MODELS


Model	Frequency Range X)	Coupling X) dB	Power Pmin W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 0101-40/100	1 ... 100 MHz	40 ±1.5	100	0.5	20	1.15:1	N-f	SMA-f

S: Single directional coupler


OPTIONS

- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request


A

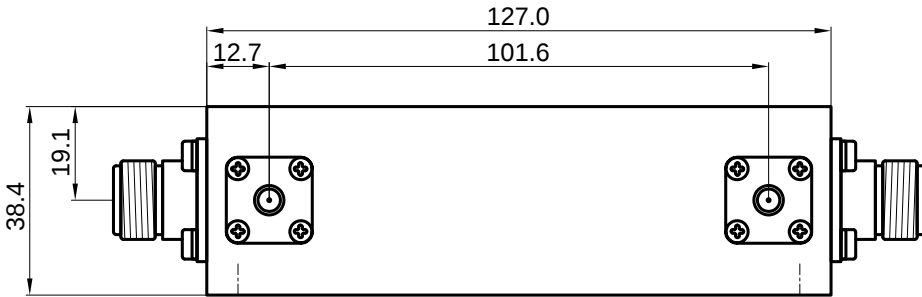

B

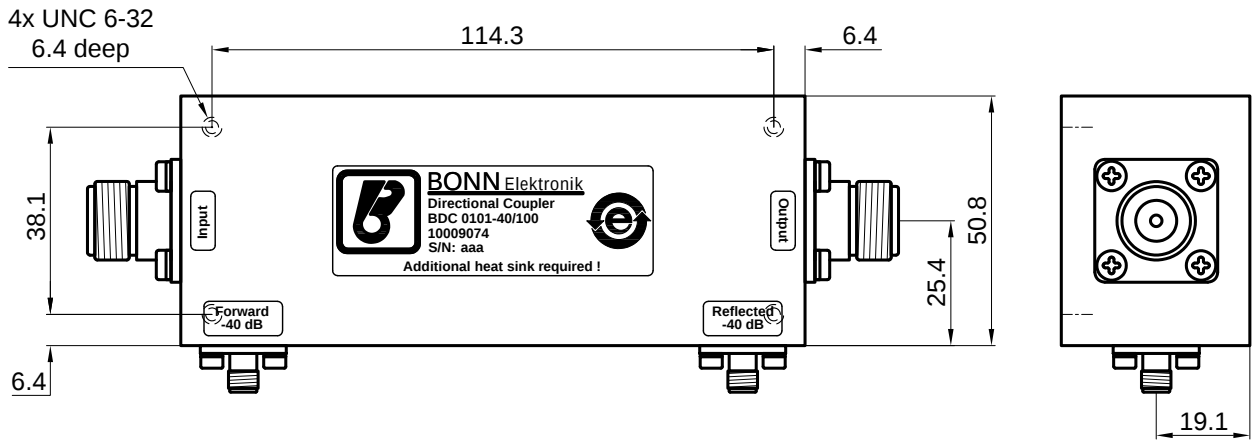

C

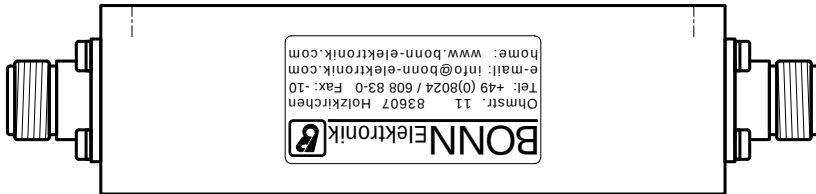

D

Product Information		Entwurf
10009074		08.05.18 Bonn
Directional Coupler		Zeichnung
BDC 0101-40/100		08.05.18 Bhu
BONN Elektronik		Prüfung
1-1		Freigabe
info@bonn-elektronik.com • www.bonn-elektronik.com		16.05.18 Bonn