


STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power P _{min} W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 0103-50/5000	1.5 ... 30 MHz	50 ±1.3	5000	0.05	25	1.10:1	N-f	SMA-f

S: Single directional coupler

OPTIONS


- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

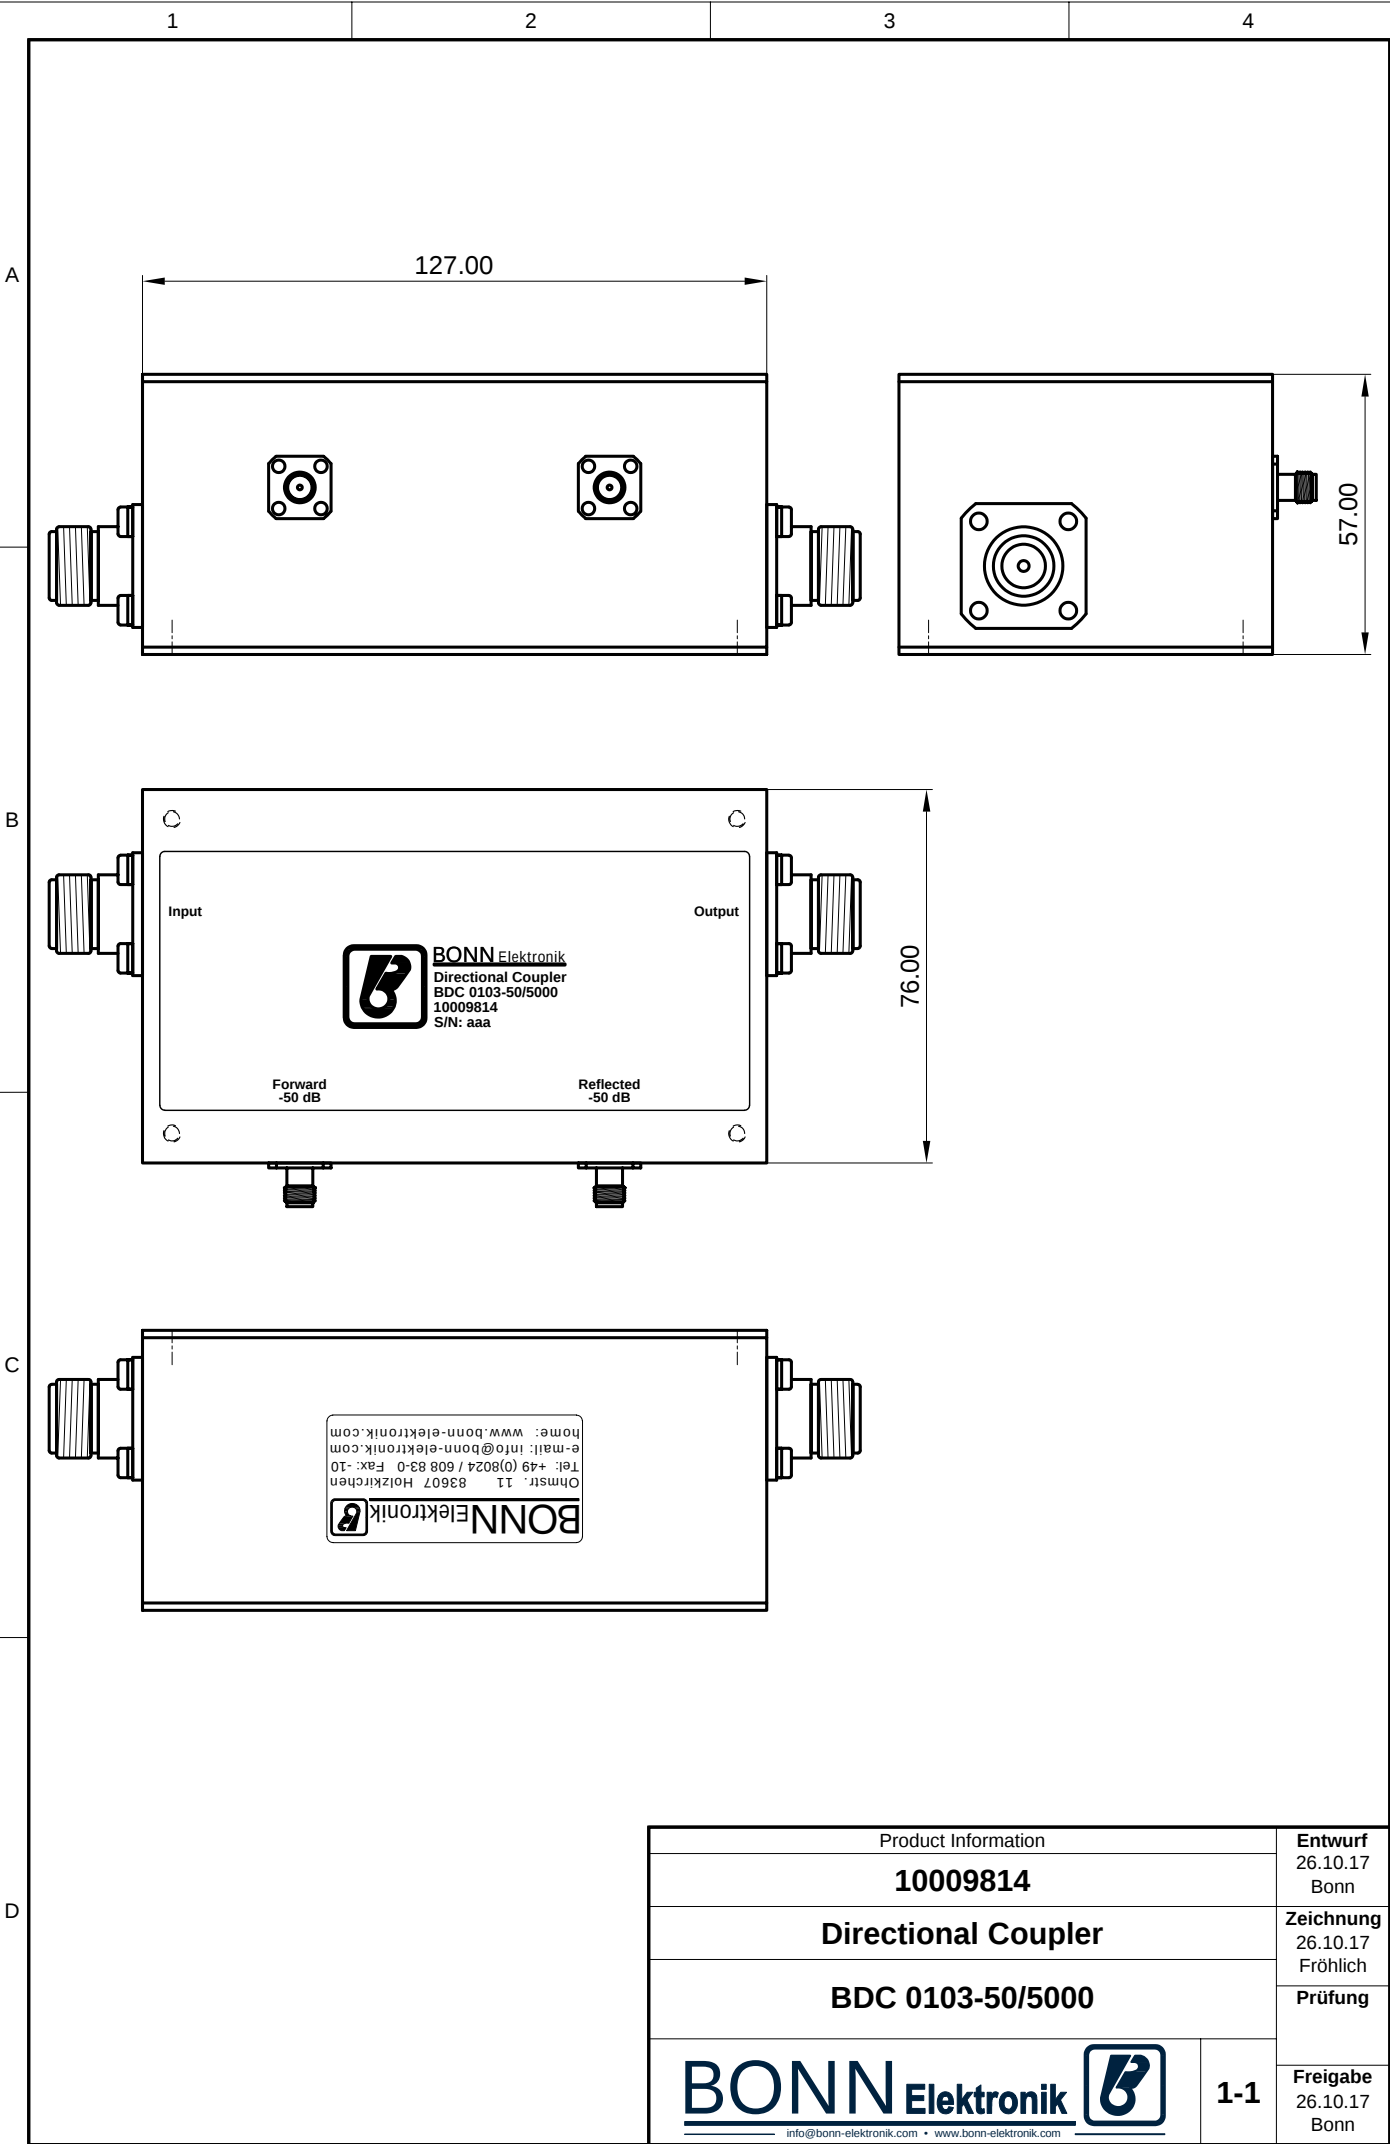

Product Information		Entwurf
10009814		26.10.17 Bonn
Directional Coupler		Zeichnung
BDC 0103-50/5000		26.10.17 Fröhlich
BONN Elektronik 		Prüfung
1-1		Freigabe
info@bonn-elektronik.com • www.bonn-elektronik.com		26.10.17 Bonn

This document is the property of Bonn Elektronik GmbH. Reproduction and release without express permission is strictly prohibited. We reserve the right to introduce modifications without prior notification, where they serve technical progress. Unless otherwise indicated all dimensions millimeters.

Dieses Dokument ist Eigentum der Firma Bonn Elektronik GmbH. Vervielfältigung und Veröffentlichung ohne ausdrückliche Genehmigung ist untersagt. Änderungen im Sinne des technischen Fortschritts können ohne Vorankündigungen vorgenommen werden. Wenn nichts anders angegeben alle Maße Millimeter.

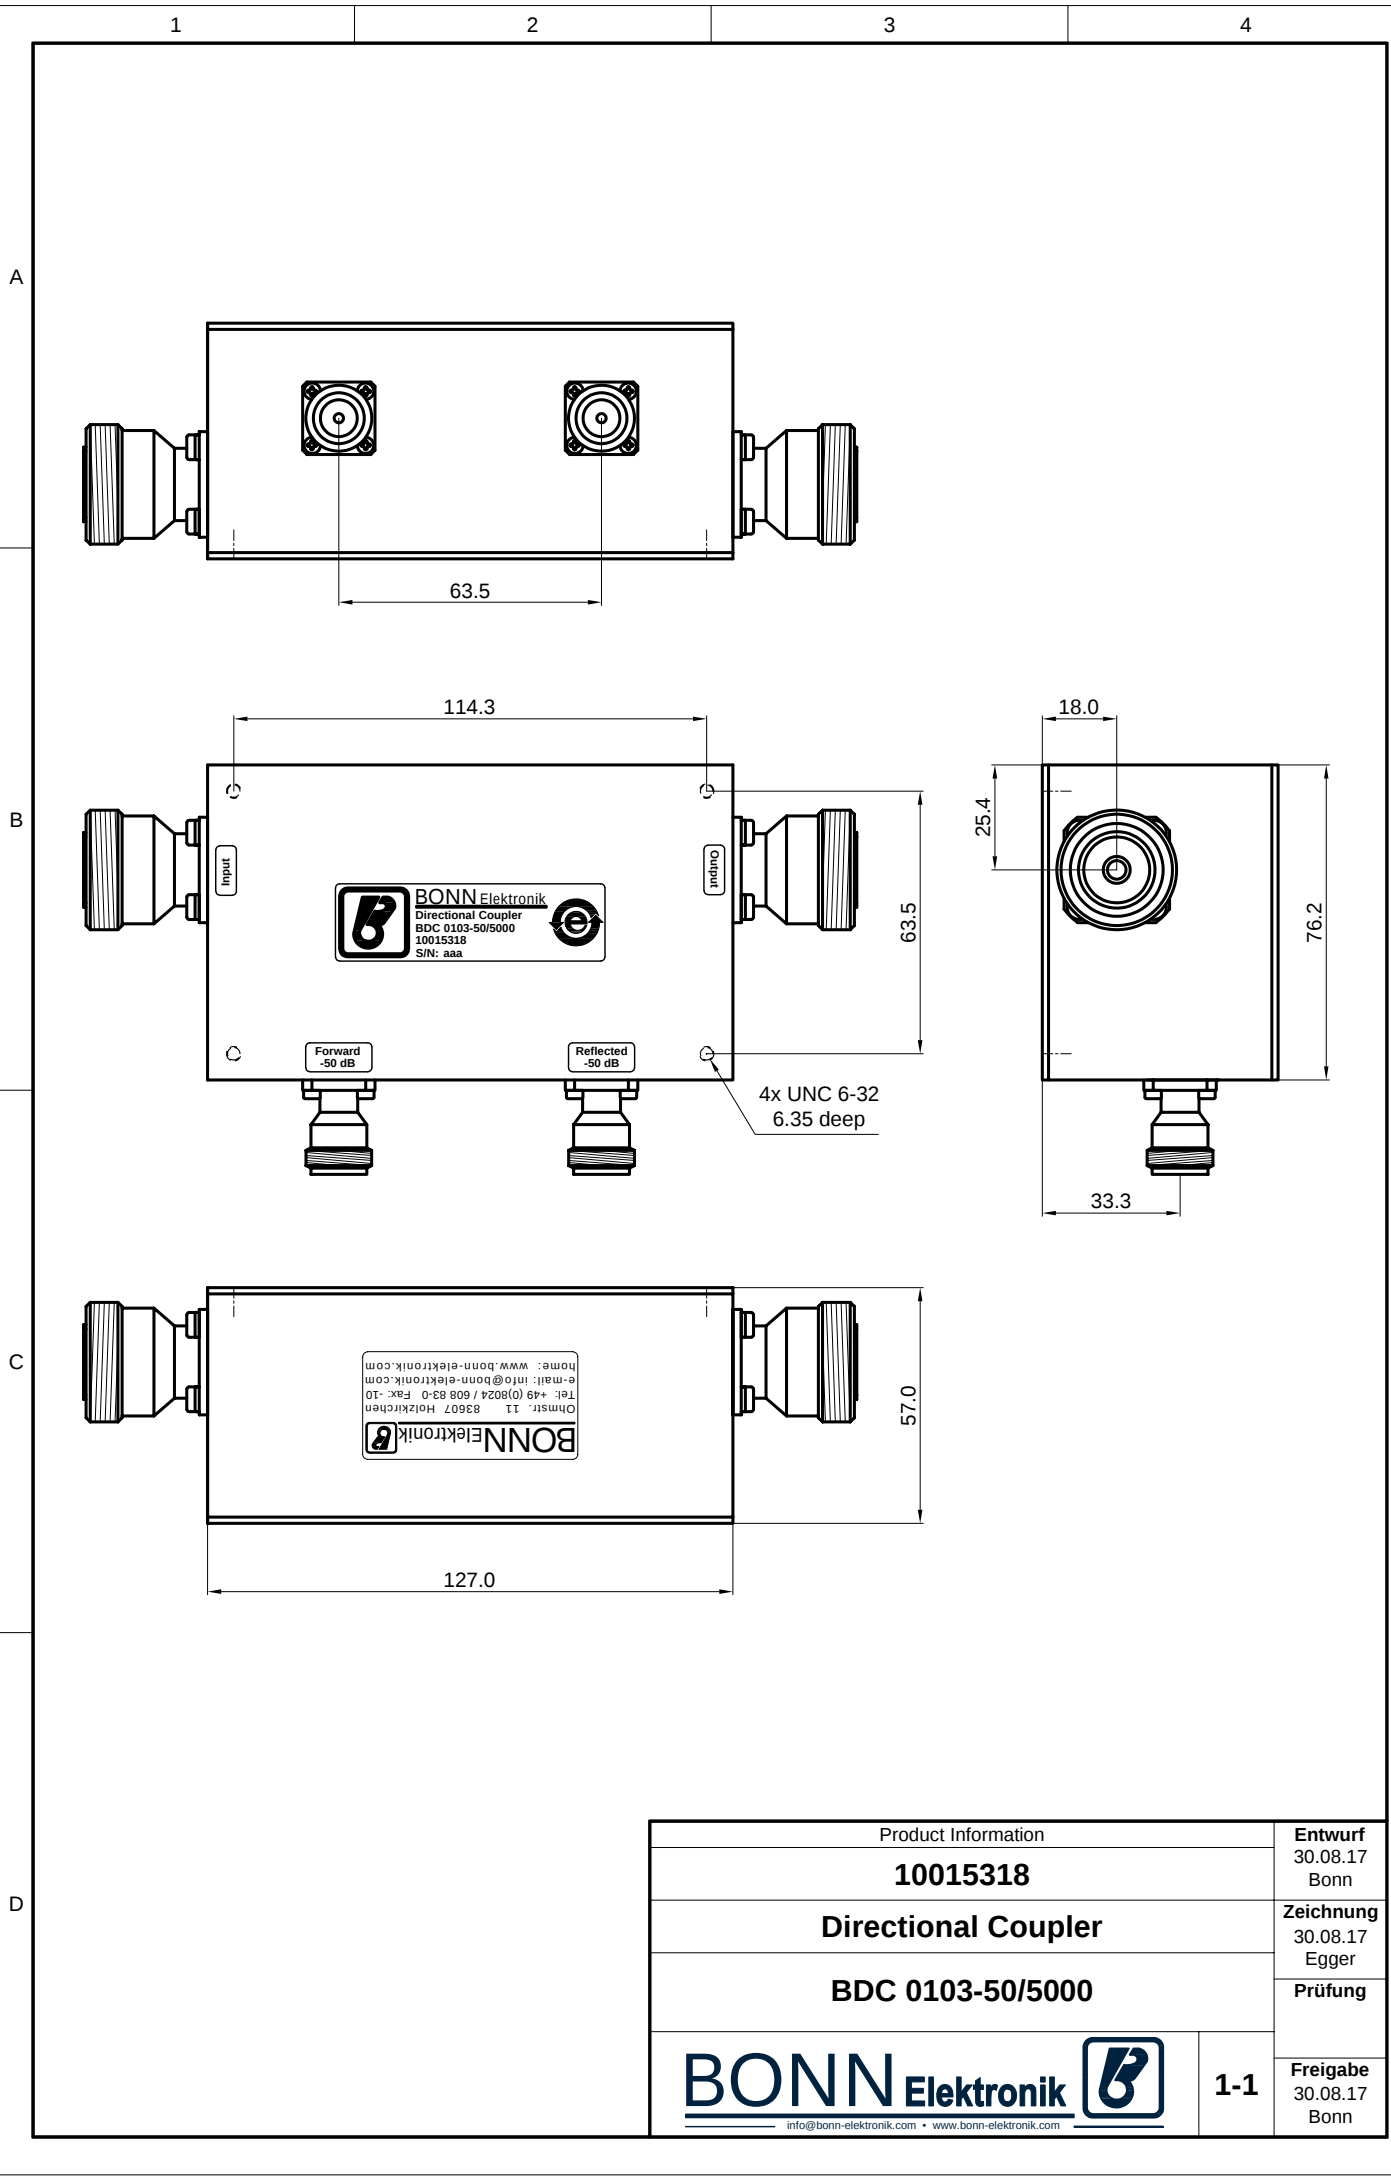

Product Information		Entwurf
10015318		30.08.17 Bonn
Directional Coupler		Zeichnung
BDC 0103-50/5000		30.08.17 Egger
BONN Elektronik  info@bonn-elektronik.com • www.bonn-elektronik.com		Prüfung
		Freigabe
1-1		30.08.17 Bonn