



STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power Pmin W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 0213-60/7000	20 ... 130 MHz	60 ±1.5	7000	0.1	25	1.15:1	1 5/8" EIA	SMA-f

S: Single directional coupler

OPTIONS




- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

A

B

C

D

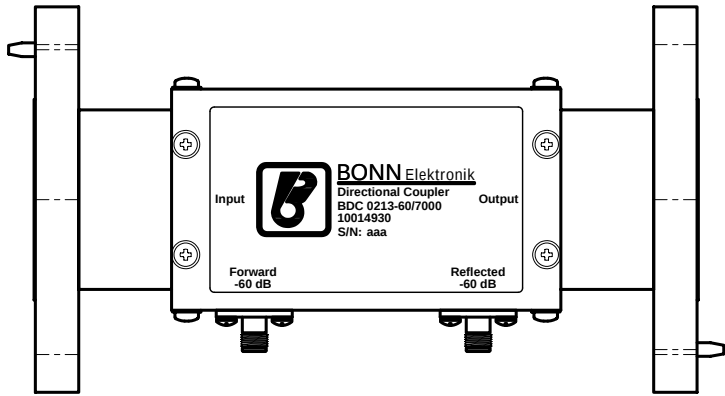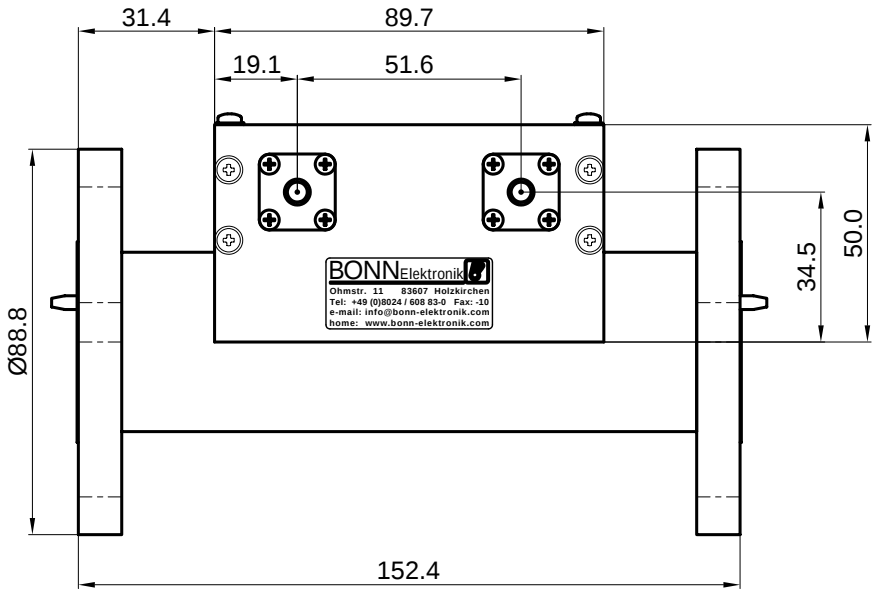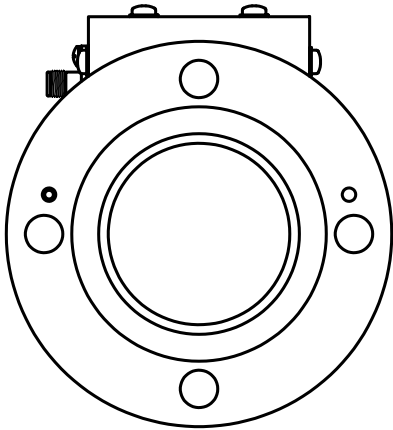

Product Information		Entwurf
10014930		04.07.18 Bonn
Directional Coupler		Zeichnung
BDC 0213-60/7000		04.07.18 Bhu
BONNElektronik		Prüfung
1-1		Freigabe
info@bonn-elektronik.com • www.bonn-elektronik.com		04.07.18 Bonn