


STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power Pmin W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 6026-20/20S	6 ... 26.5 GHz	20 ±1.8	20	0.7	13	1.55:1	2,92 mm-f	2,92 mm-f

S: Single directional coupler

OPTIONS

- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

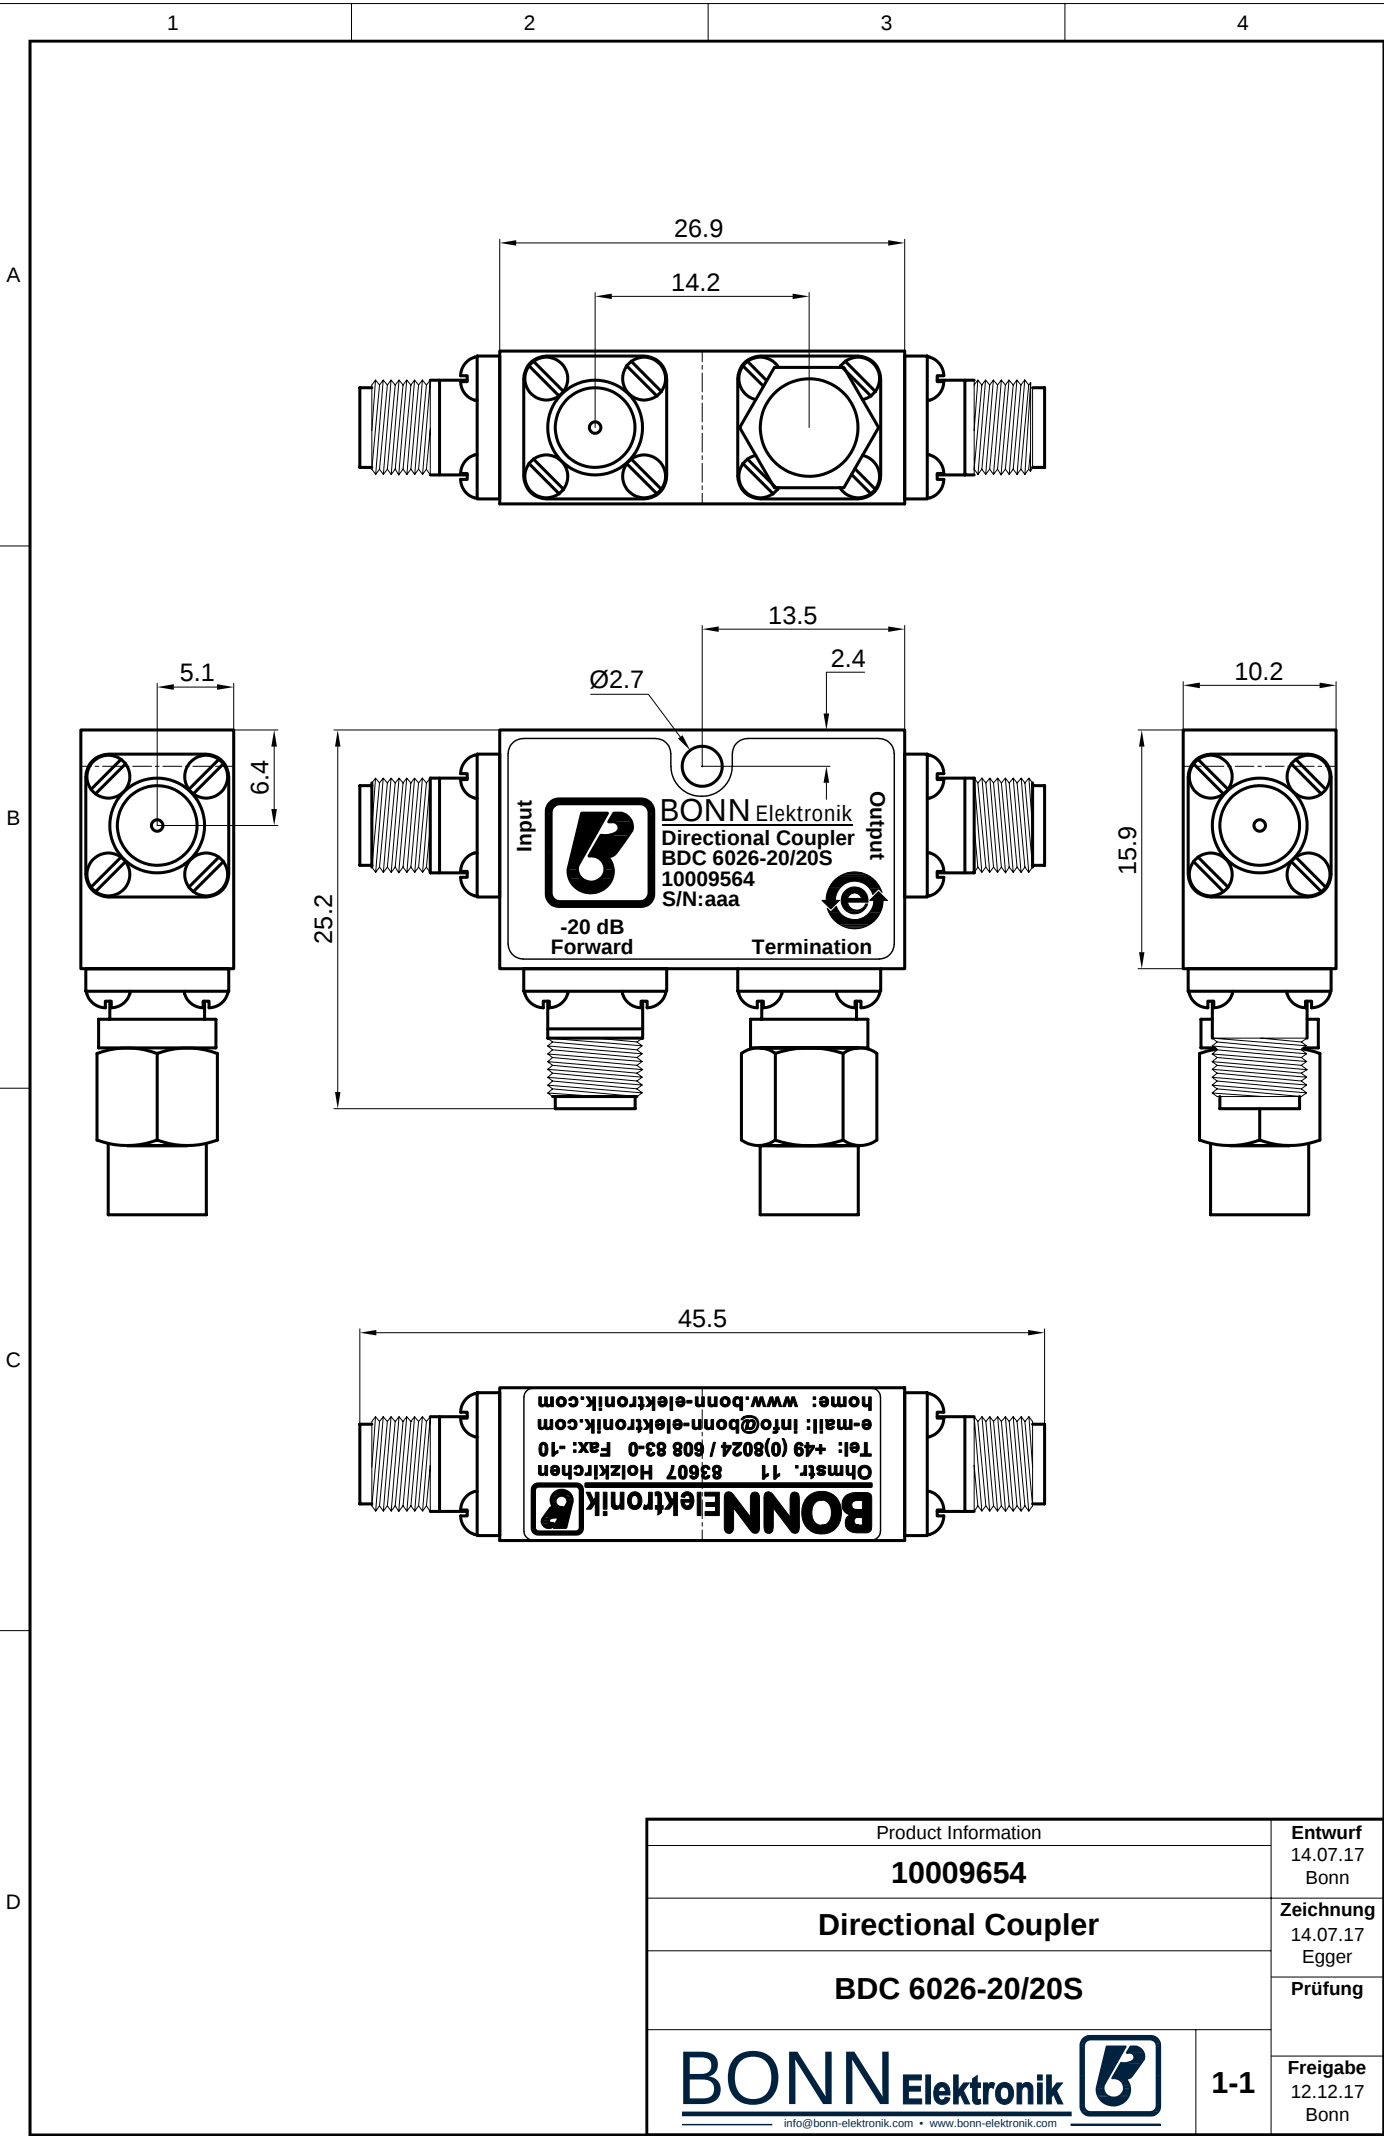

Product Information		Entwurf
10009654		14.07.17 Bonn
Directional Coupler		Zeichnung
BDC 6026-20/20S		14.07.17 Egger
		Prüfung
BONN Elektronik 		Freigabe
1-1		12.12.17 Bonn