




STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power Pmin W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 8018-30/1000	7.5 ... 18 GHz	30 ±3	1000	0.5	25	1.25:1	WRD-750	SMA-f

S: Single directional coupler

OPTIONS

- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

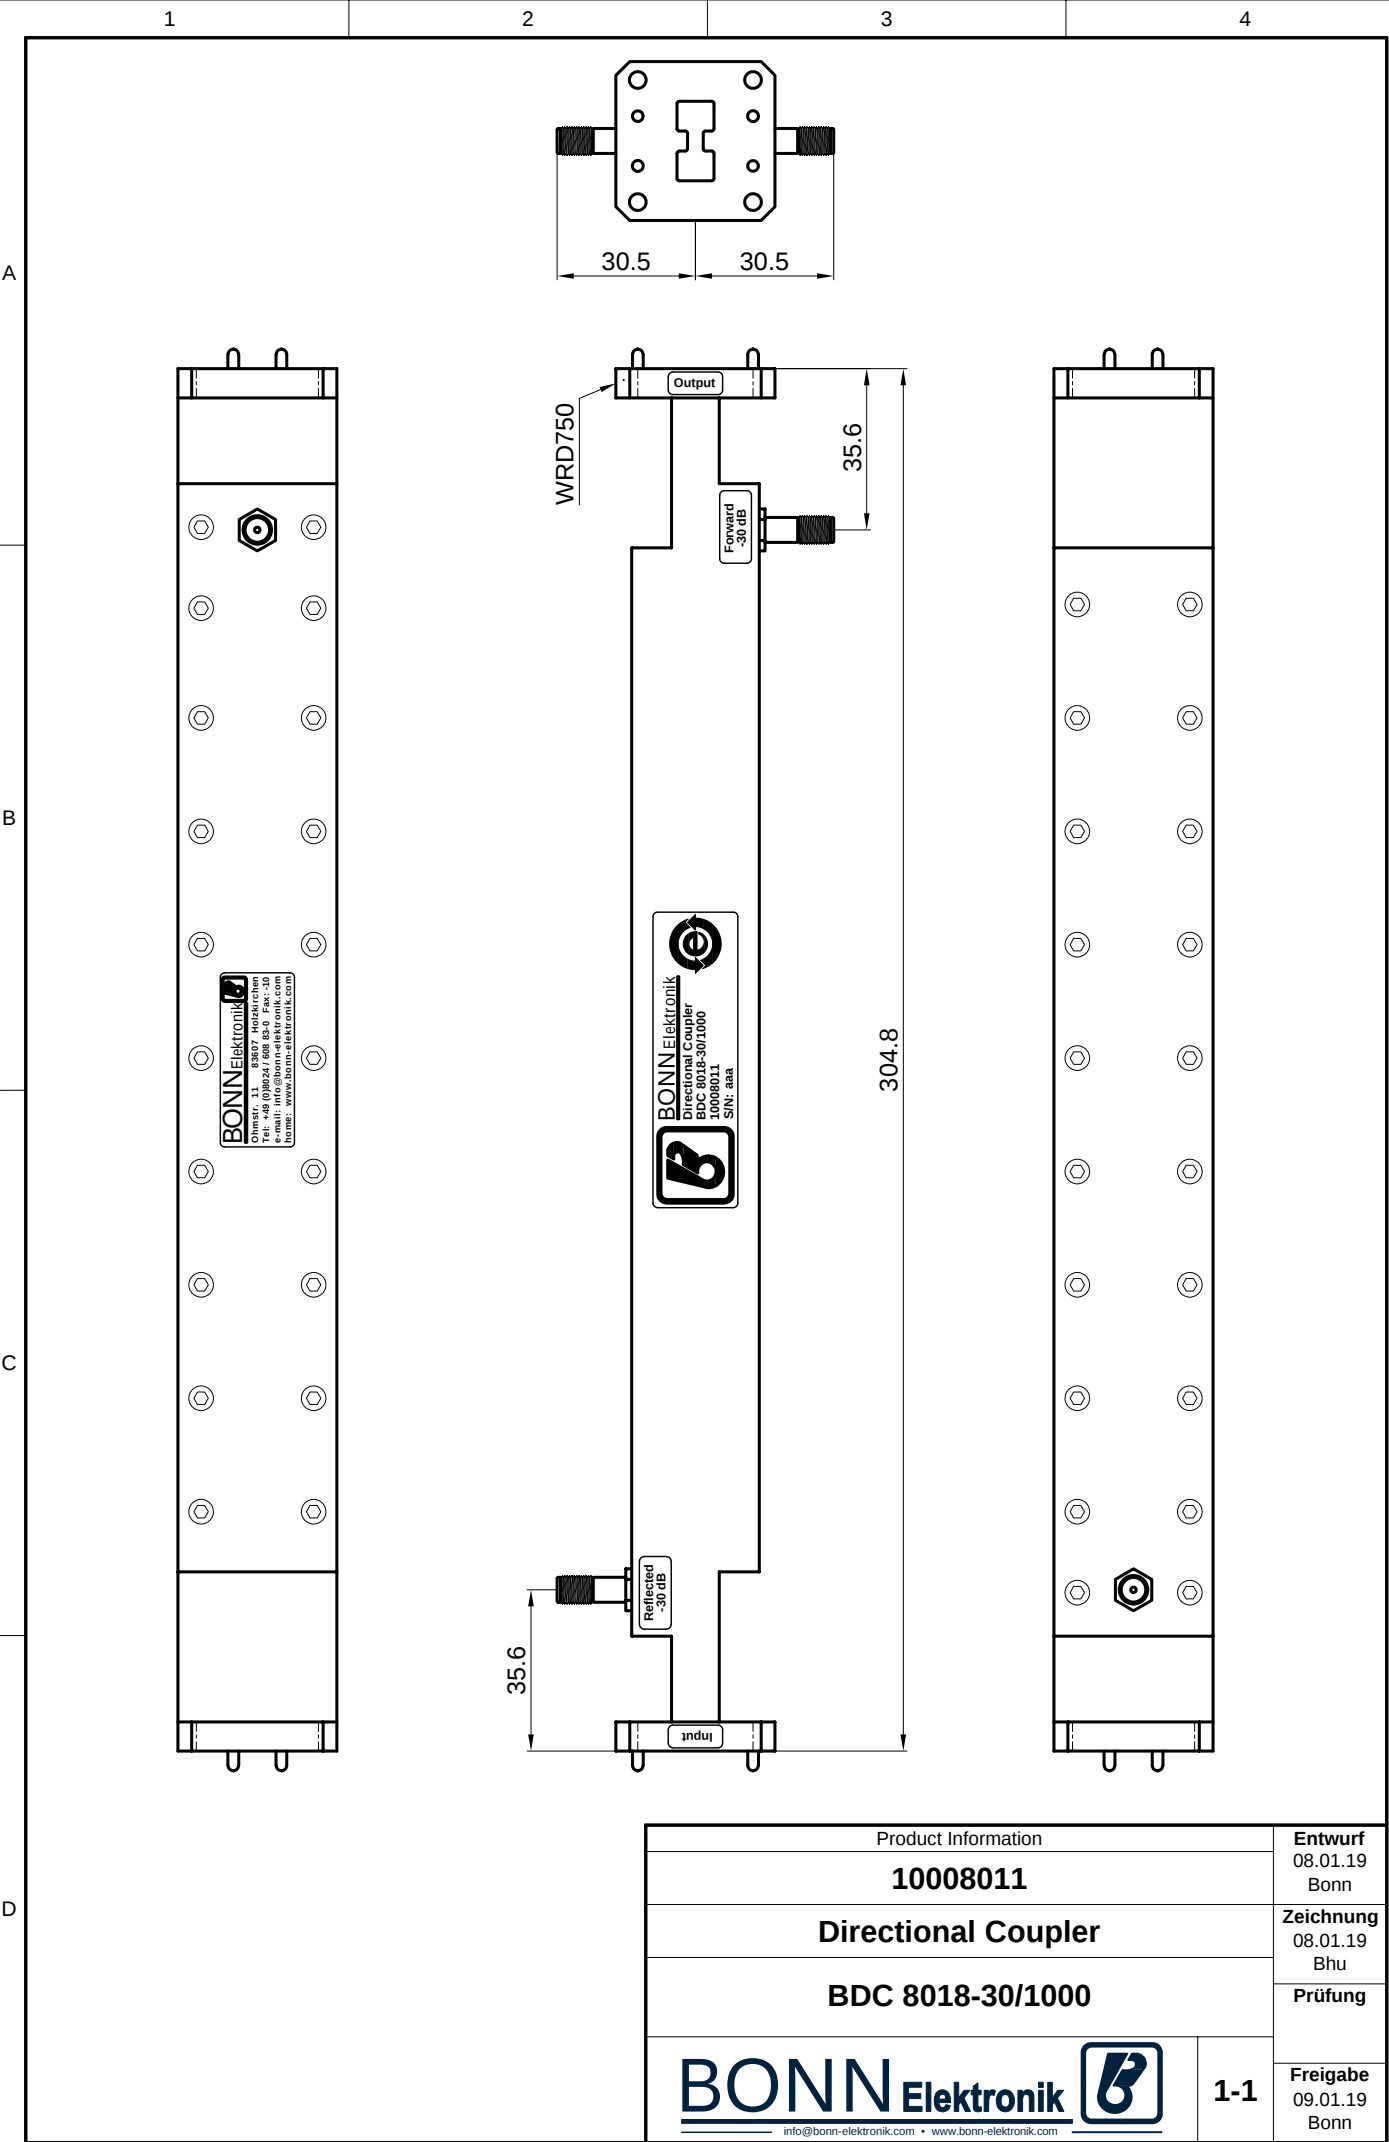

Product Information		Entwurf
10008011		08.01.19 Bonn
Directional Coupler		Zeichnung 08.01.19 Bhu
BDC 8018-30/1000		Prüfung
BONN Elektronik 		Freigabe 09.01.19 Bonn
info@bonn-elektronik.com • www.bonn-elektronik.com		1-1