




STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power Pmin W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 1840-40/100	18 ... 40 GHz	40 ±2.5	100	0.5	25	1.2:1	WRD-180	2,92 mm-f

S: Single directional coupler

OPTIONS

- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

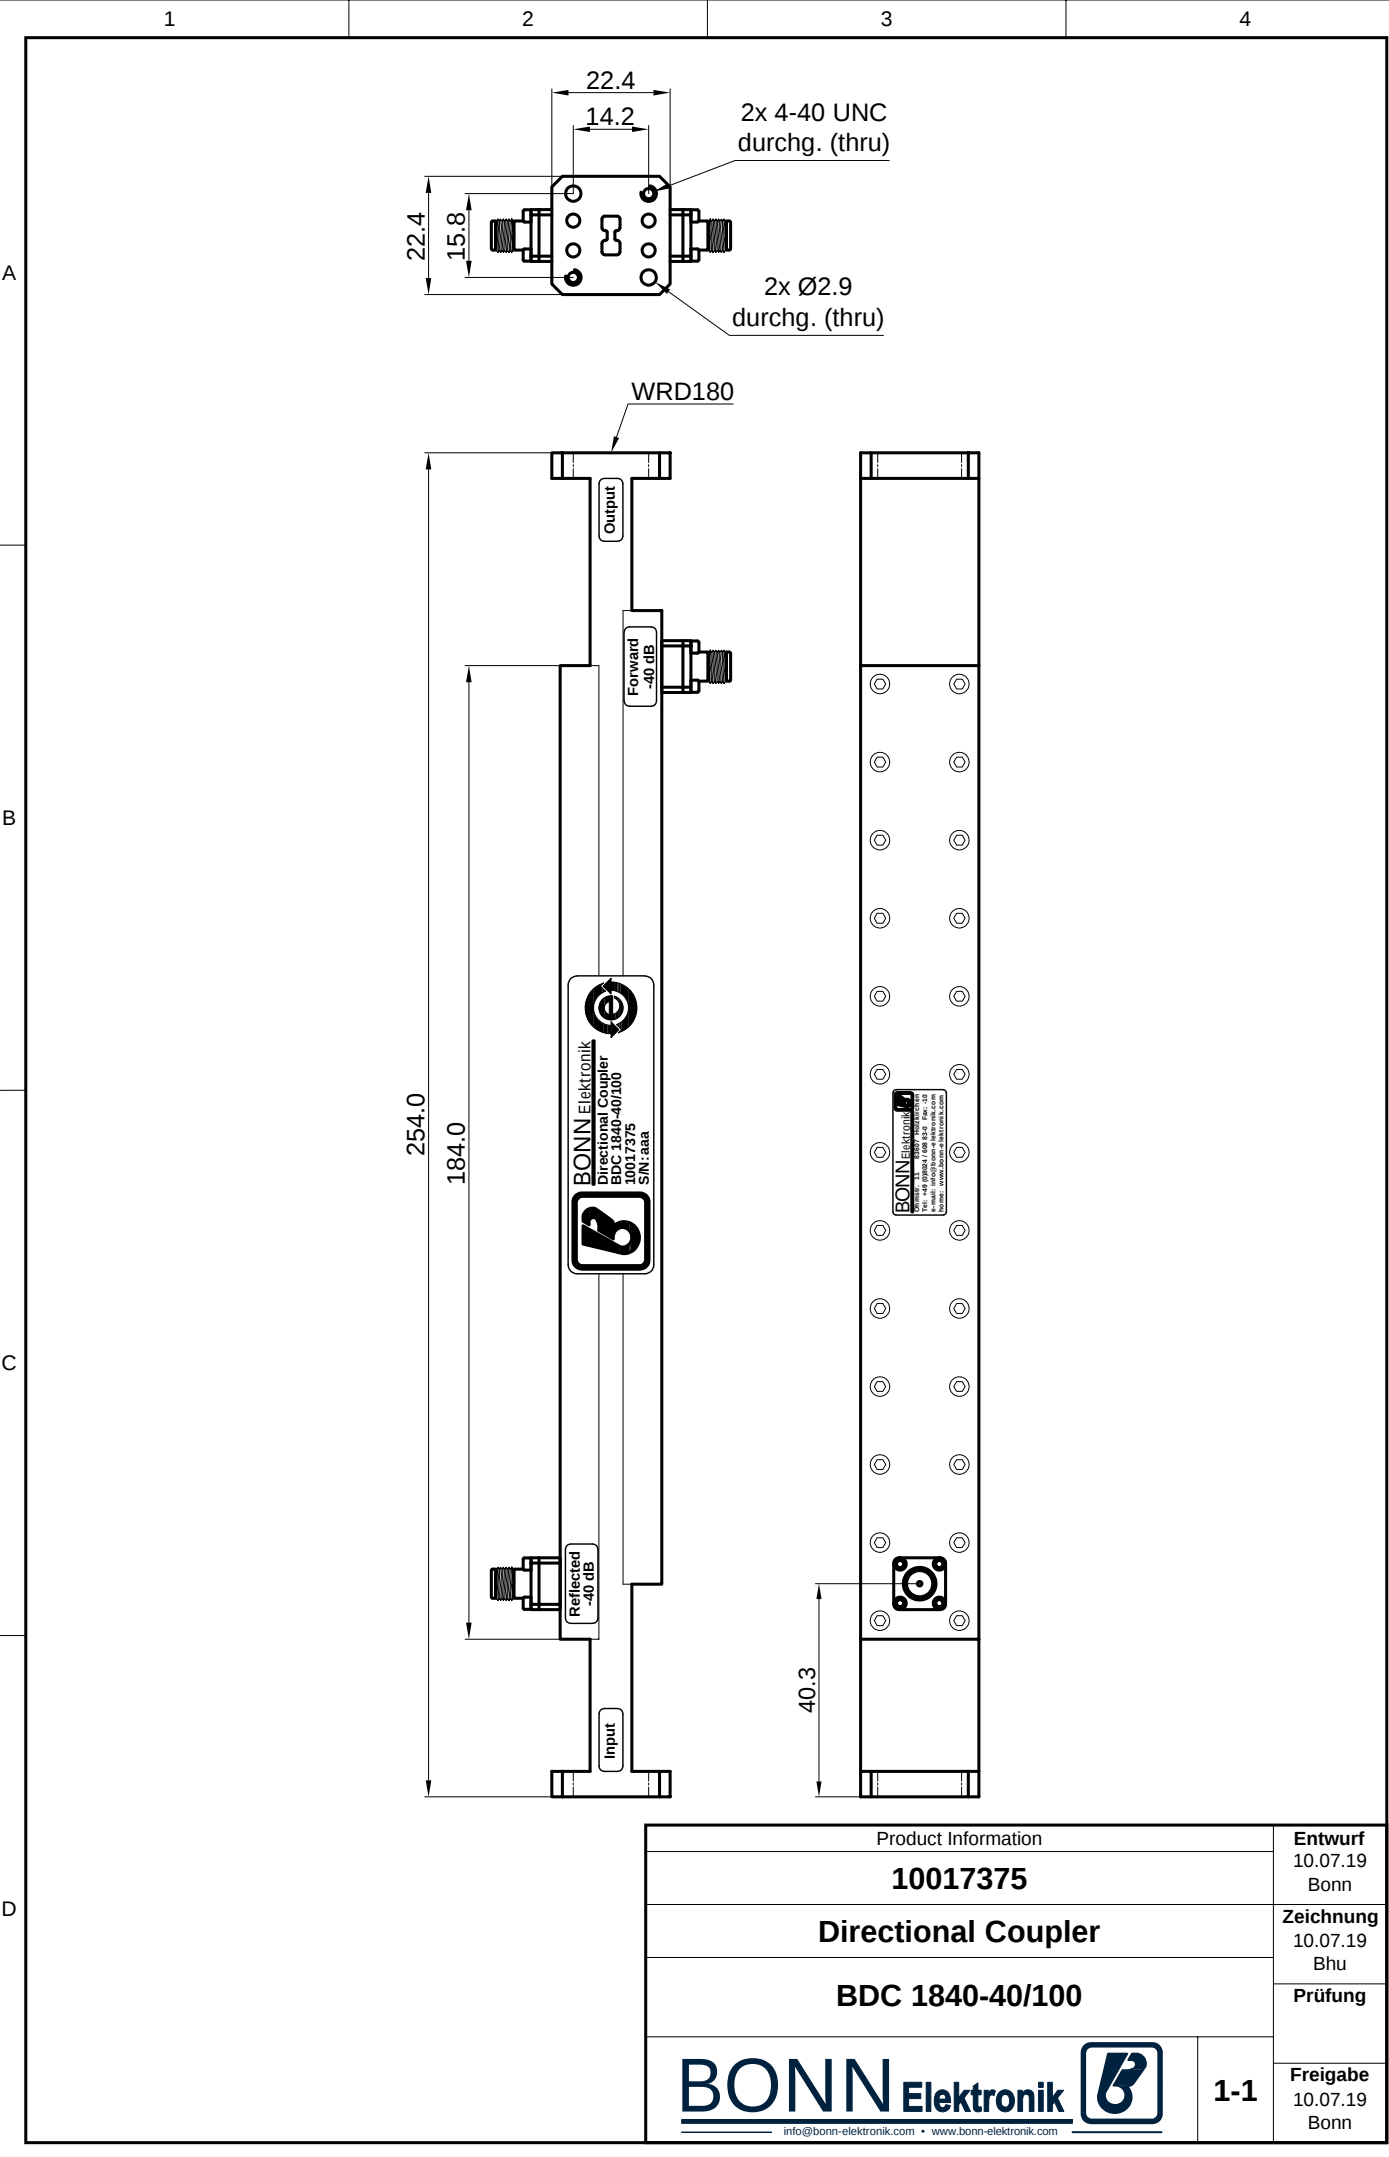

Product Information		Entwurf
10017375		10.07.19 Bonn
Directional Coupler		Zeichnung
BDC 1840-40/100		10.07.19 Bhu
BONNElektronik info@bonn-elektronik.com • www.bonn-elektronik.com		Prüfung
		Freigabe
1-1		10.07.19 Bonn