


STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power Pmin W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 6018-50/1000	6 ... 18 GHz *)	50 ±3	1000	0.5	25	1.2:1	WRD-650	SMA-f

S: Single directional coupler

OPTIONS

- 1) Male RF input connector
- 2) Alternative main line connectors
- 3) N-f coupling connectors
- X) Custom frequency range and custom coupling attenuation upon request

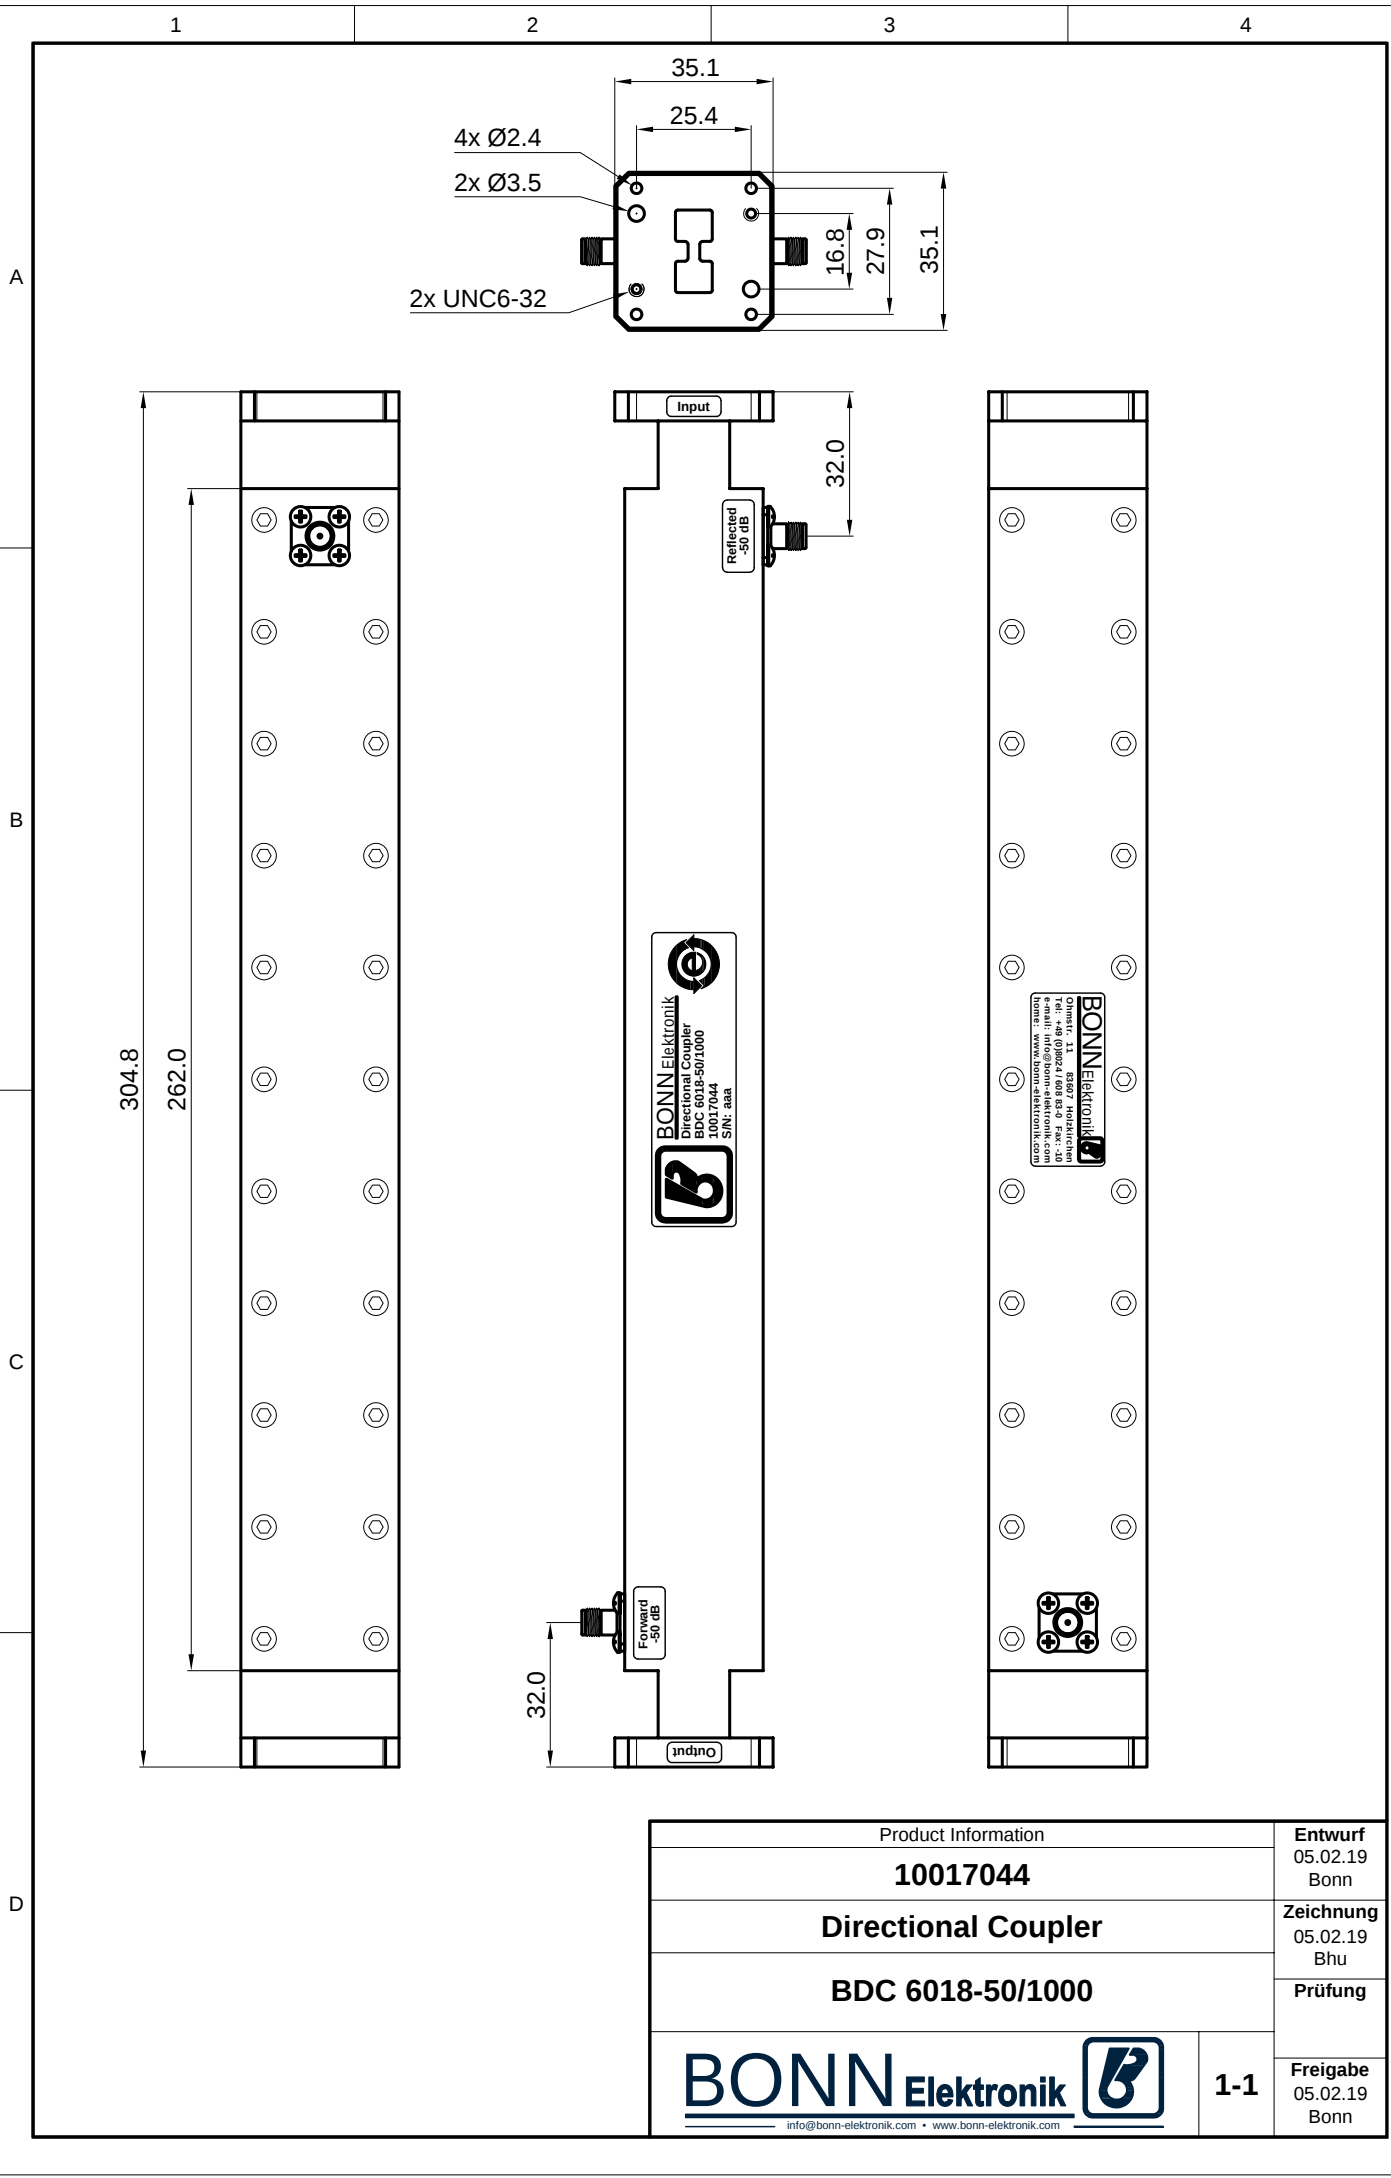

Product Information		Entwurf
10017044		05.02.19 Bonn
Directional Coupler		Zeichnung
		05.02.19 Bhu
BDC 6018-50/1000		Prüfung
BONNElektronik info@bonn-elektronik.com • www.bonn-elektronik.com		Freigabe
		05.02.19 Bonn

1-1