

BDC 9 kHz ... 250 MHz Directional Coupler

STANDARD MODELS

Model	Frequency Range X)	Power P _{min} W	Coupling X) dB	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 0125-30/100	9 kHz ... 250 MHz	100	30 ±1.8	0.8	20	1.25:1	N-f	SMA-f

S: Single directional coupler

Dimensions without connectors


OPTIONS


1) male RF input connector


2) alternative main line connectors


3) N-f coupling connectors

X) custom frequency range and custom coupling attenuation upon request

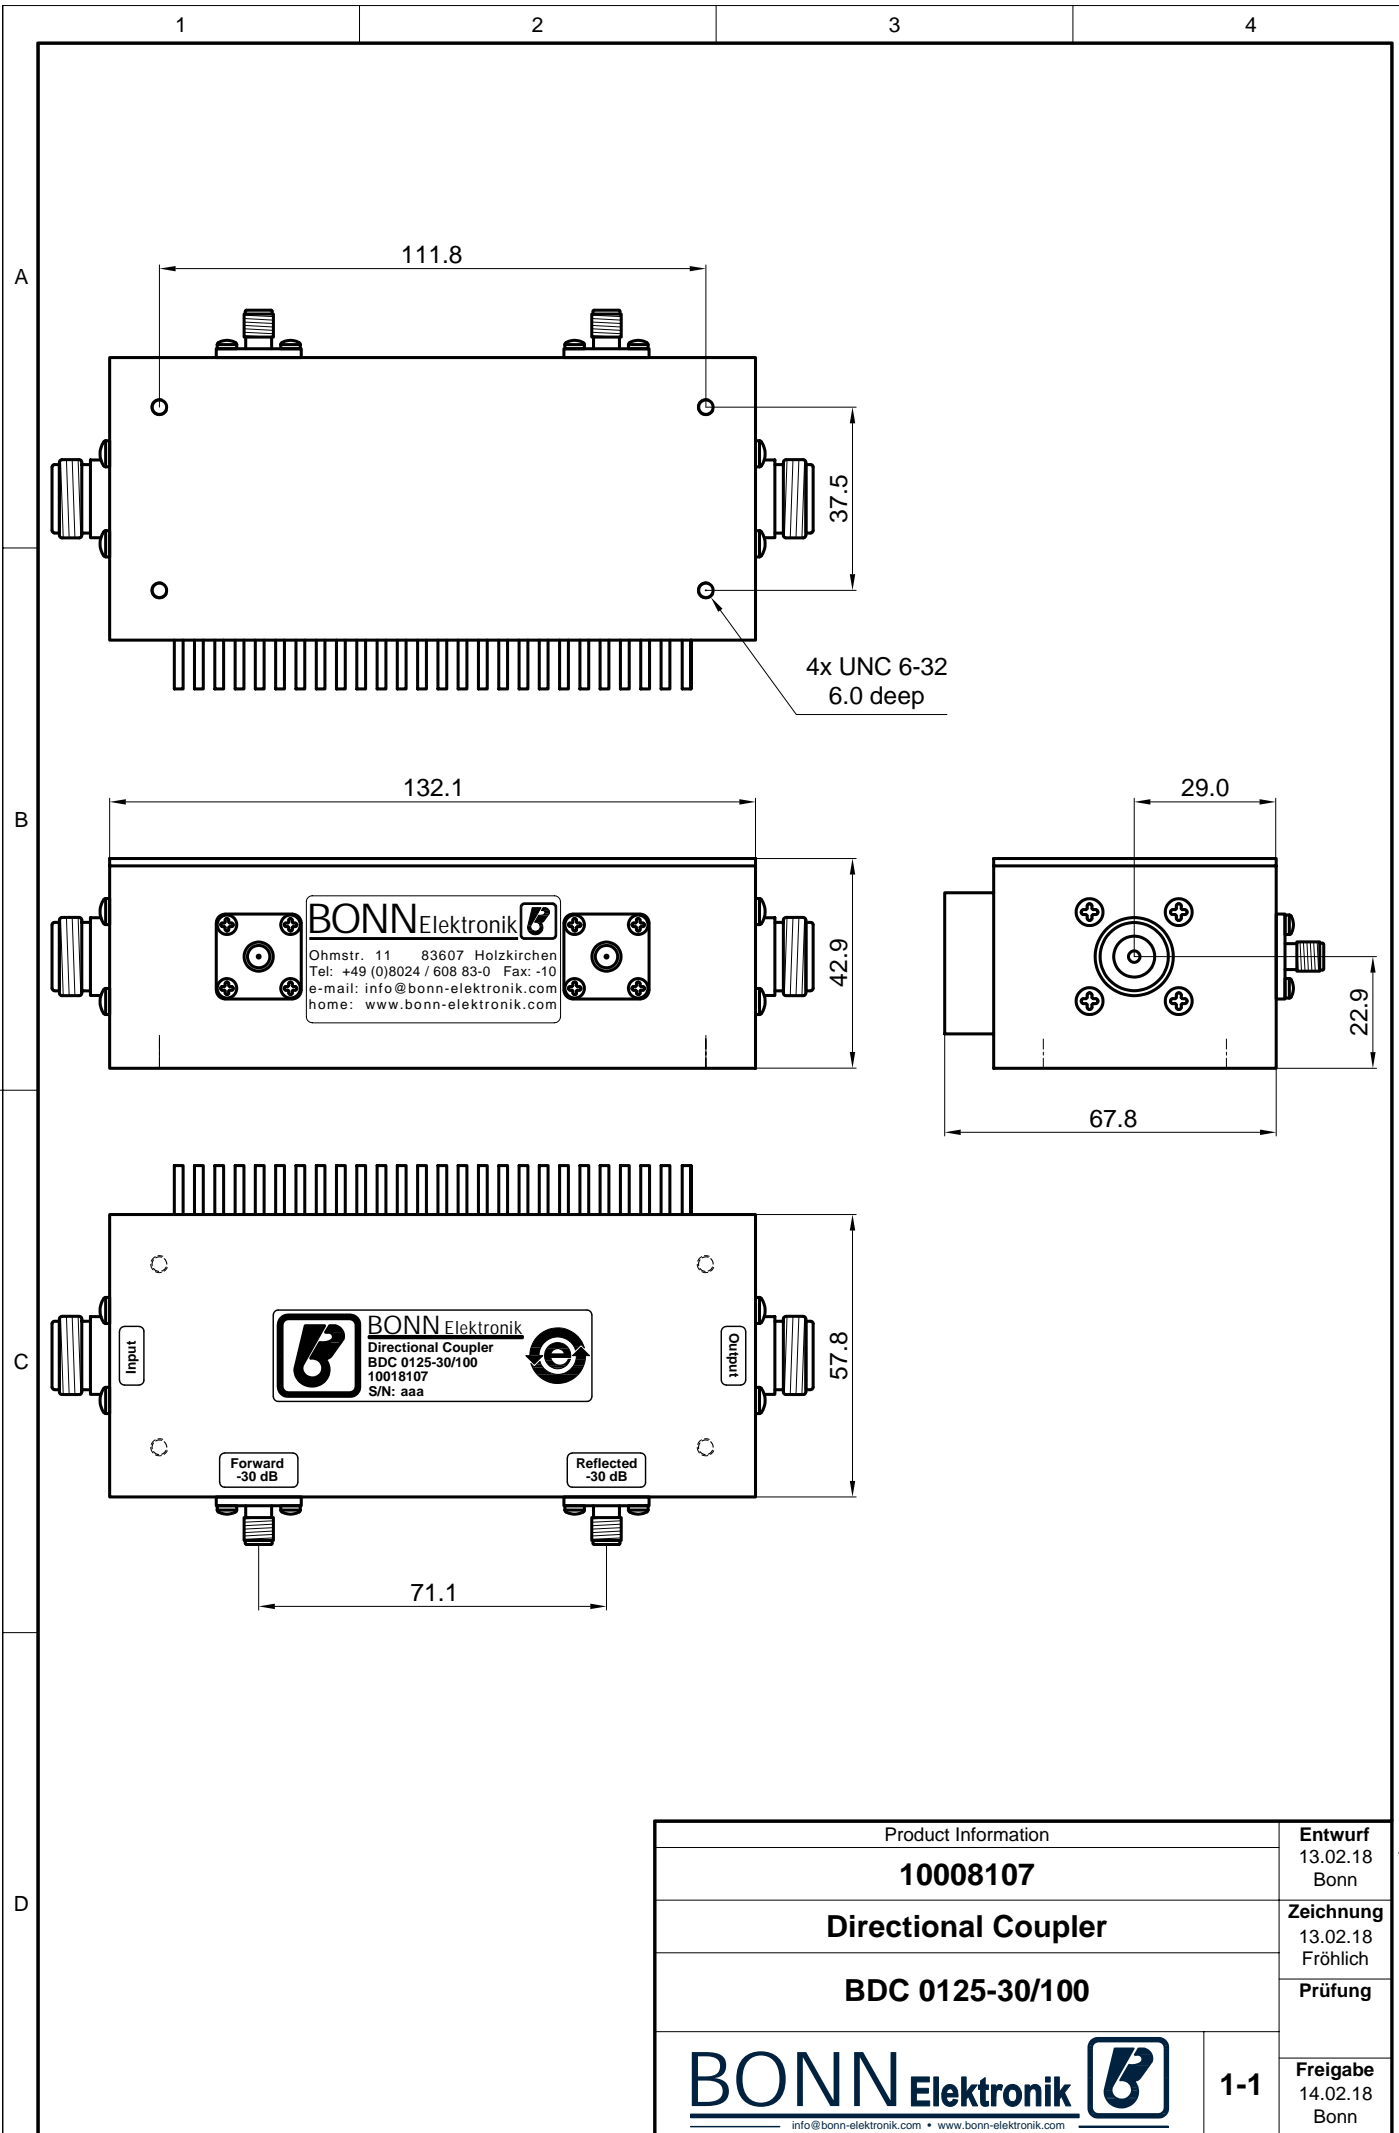

Product Information		Entwurf 13.02.18 Bonn
10008107		Zeichnung 13.02.18 Fröhlich
Directional Coupler		Prüfung
BDC 0125-30/100		Freigabe 14.02.18 Bonn
 info@bonn-elektronik.com • www.bonn-elektronik.com		1-1

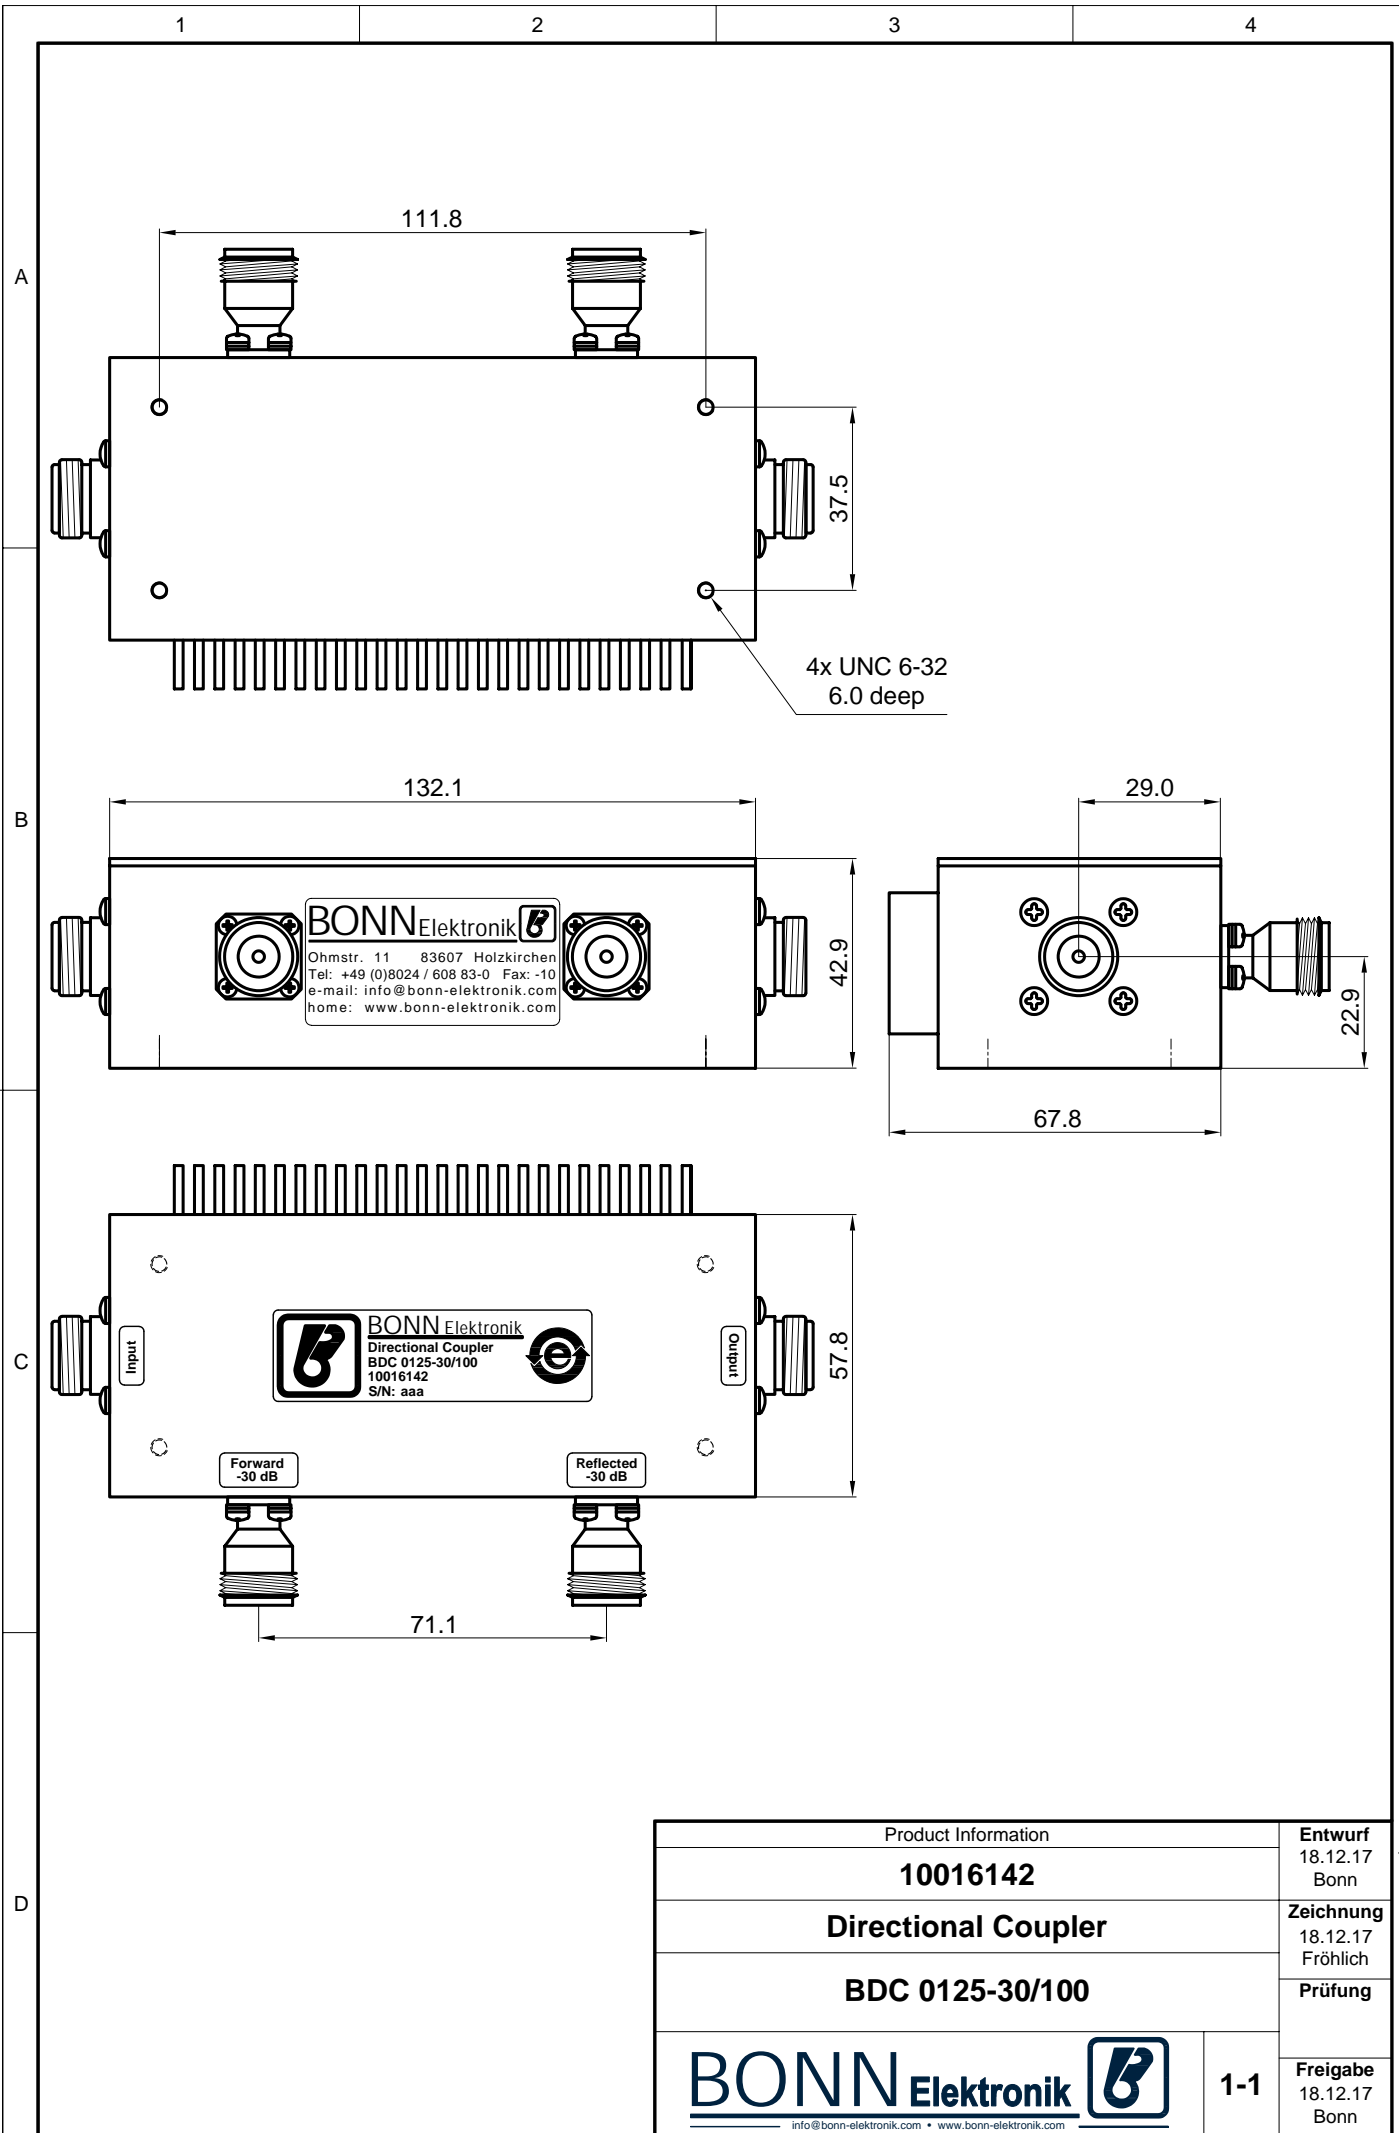

Product Information		Entwurf 18.12.17 Bonn
10016142		Zeichnung 18.12.17 Fröhlich
Directional Coupler		Prüfung
BDC 0125-30/100		Freigabe 18.12.17 Bonn
		1-1
<small>info@bonn-elektronik.com • www.bonn-elektronik.com</small>		