

BDC 18 ... 26.5 GHz Directional Coupler

STANDARD MODELS

Model	Frequency Range X)	Power P _{min} W	Coupling X) dB	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 1826-30/50S	18 ... 26.5 GHz	50	30 ±1.9	0.2	30	1.35:1	WR-42	SMA-f

S: Single directional coupler

Dimensions without connectors


OPTIONS


1) male RF input connector

2) alternative main line connectors

3) N-f coupling connectors

X) custom frequency range and custom coupling attenuation upon request

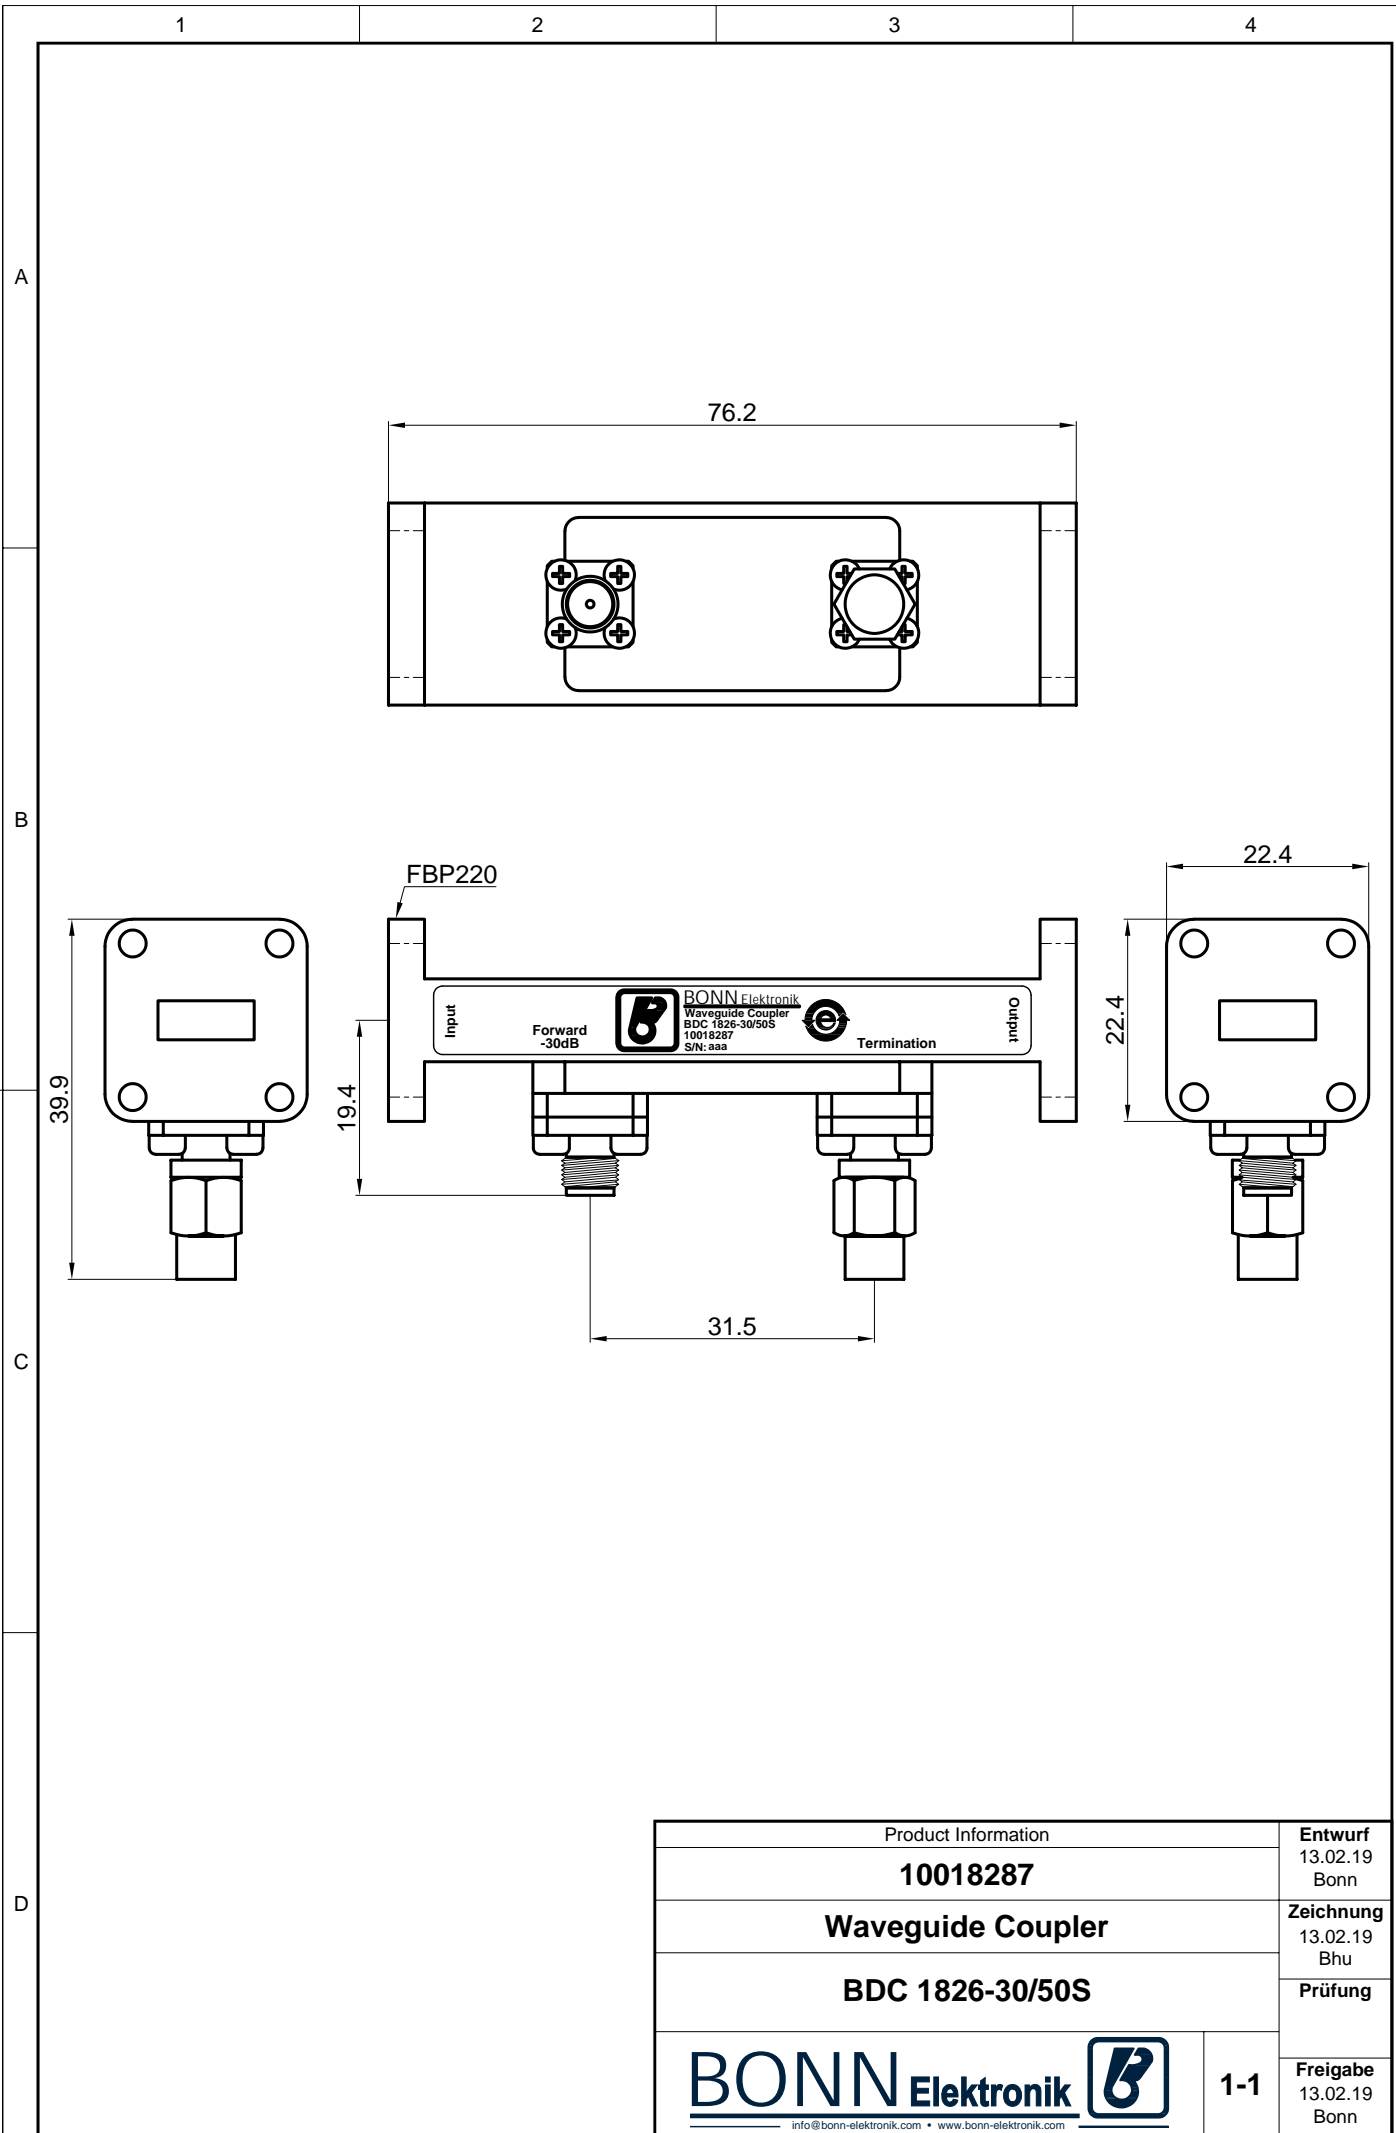

Product Information		Entwurf 13.02.19 Bonn
10018287		Zeichnung 13.02.19 Bhu
Waveguide Coupler		Prüfung
BDC 1826-30/50S		Freigabe 13.02.19 Bonn
BONN Elektronik 		1-1
info@bonn-elektronik.com • www.bonn-elektronik.com		