

BDC 26.5 ... 40 GHz Directional Coupler

STANDARD MODELS

Model	Frequency Range X)	Power P _{min} W	Coupling X) dB	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 2640-30/50S	26.5 ... 40 GHz	50	30 ±1.5	0.2	40	1.2:1	WR-28	WR-28

S: Single directional coupler

Dimensions without connectors


OPTIONS


1) male RF input connector

2) alternative main line connectors

3) N-f coupling connectors

X) custom frequency range and custom coupling attenuation upon request

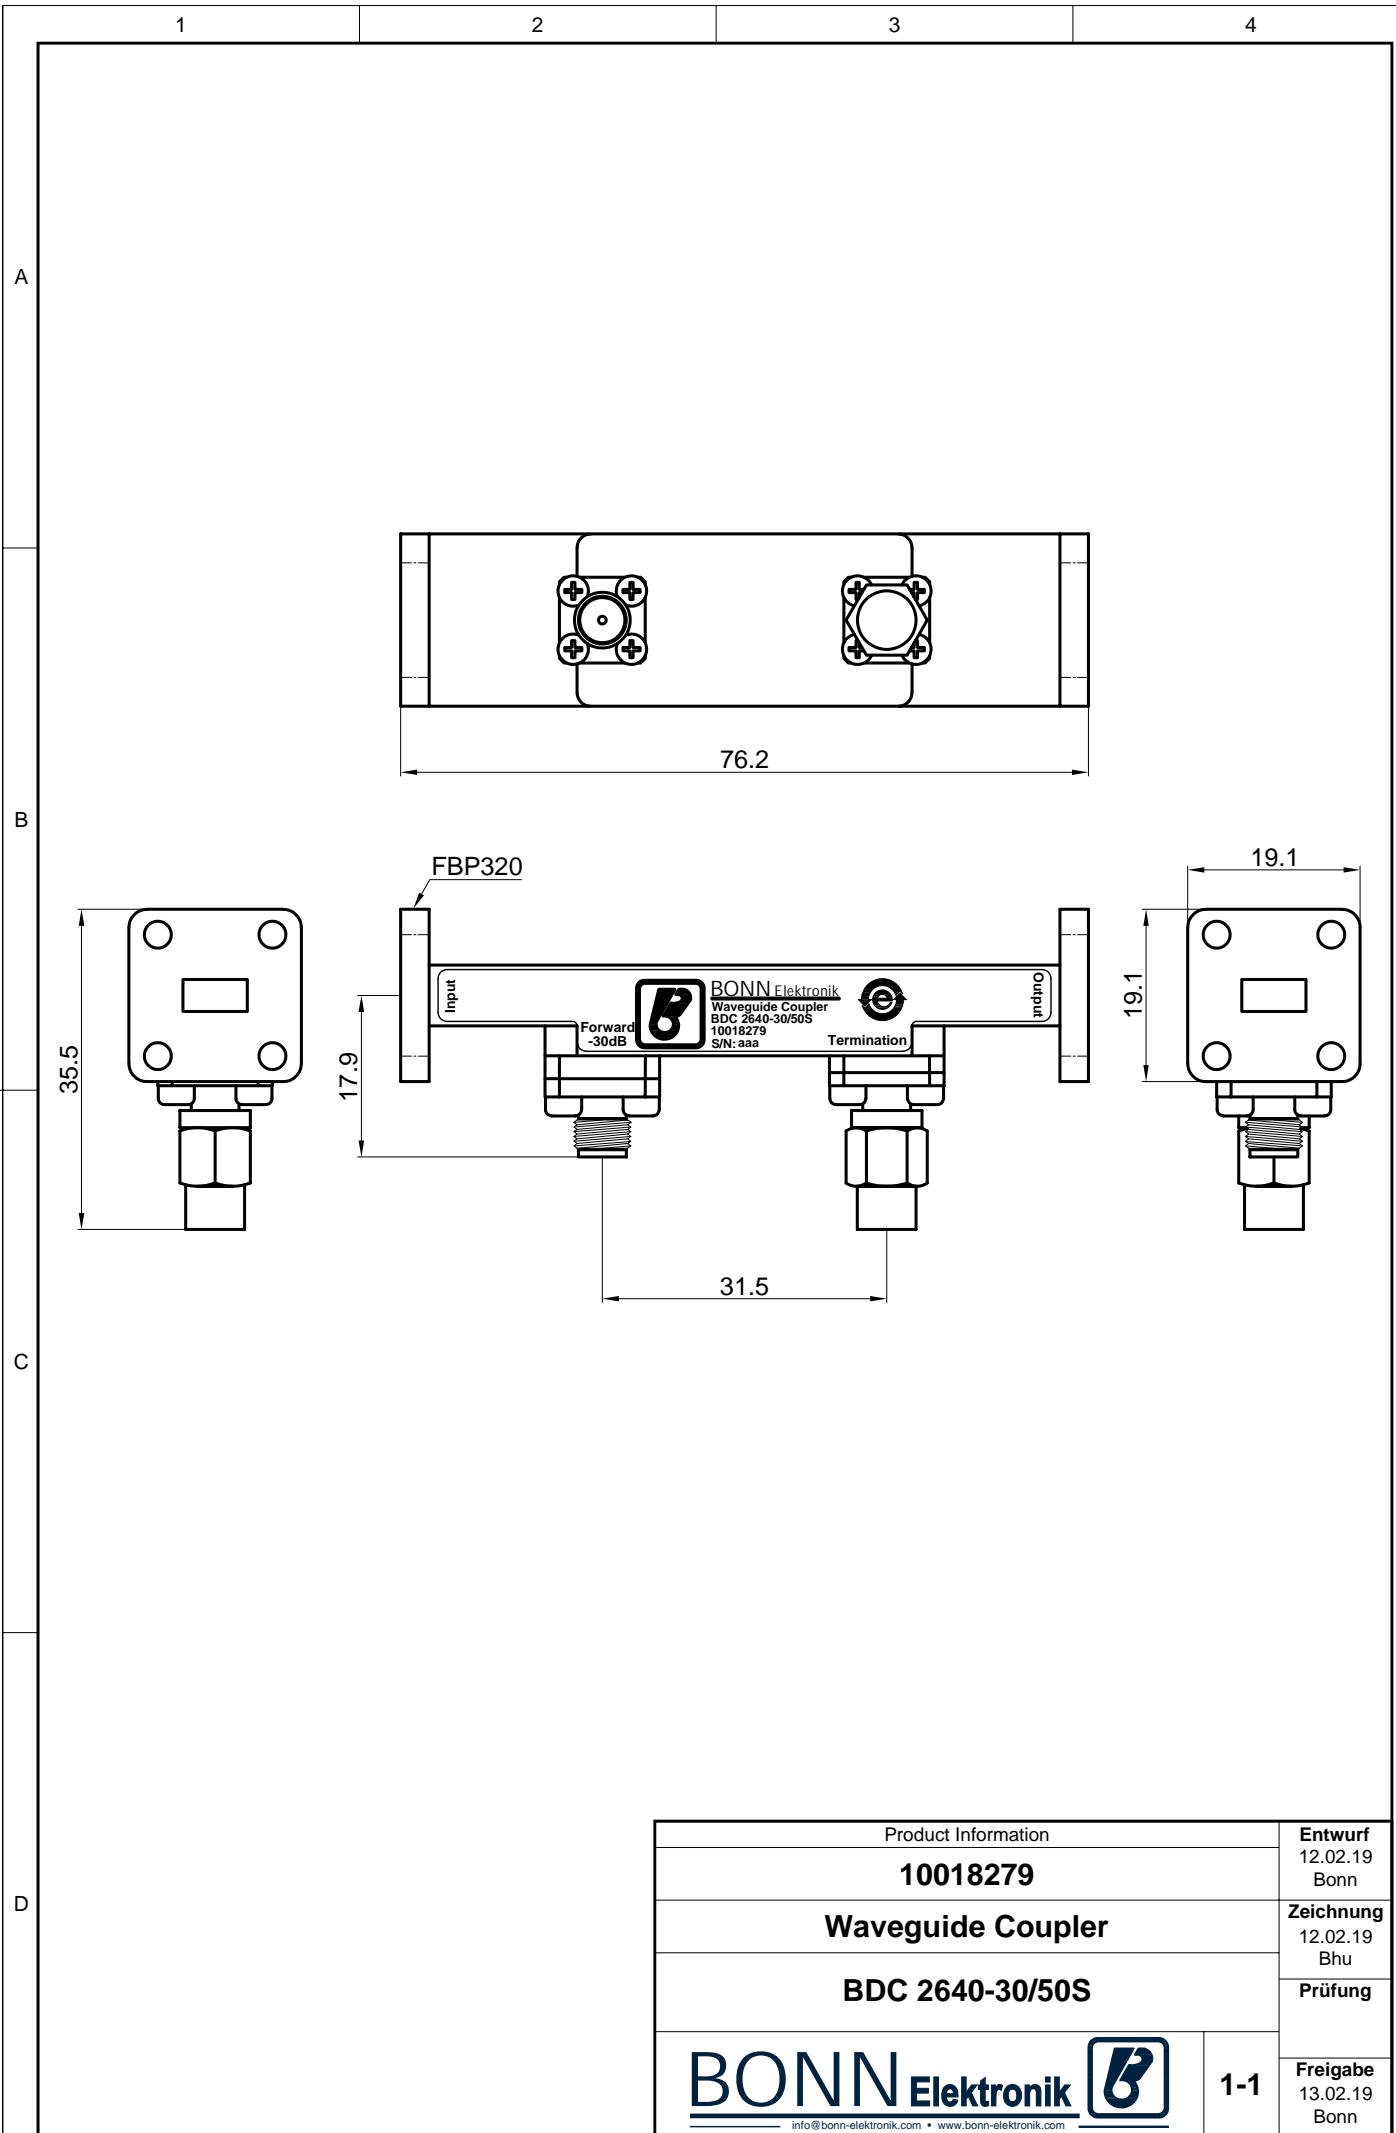

Product Information		Entwurf 12.02.19 Bonn
10018279		Zeichnung 12.02.19 Bhu
Waveguide Coupler		Prüfung
BDC 2640-30/50S		Freigabe 13.02.19 Bonn
BONN Elektronik 		1-1
info@bonn-elektronik.com • www.bonn-elektronik.com		