

BDC 1 ... 18 GHz Directional Coupler

STANDARD MODELS

Model	Frequency Range X)	Power P _{min} W	Coupling X) dB	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 1018-20/25S	1 ... 18 GHz	25	20 ±1.5	0.8	12	1.5:1	SMA-f	SMA-f

S: Single directional coupler

Dimensions without connectors

OPTIONS

1) male RF input connector


2) alternative main line connectors


3) N-f coupling connectors

X) custom frequency range and custom coupling attenuation upon request

Dieses Dokument ist Eigentum der Firma Bonn Elektronik GmbH. Vervielfältigung und Veröffentlichung ohne ausdrückliche Genehmigung ist untersagt. Änderungen im Sinne des technischen Fortschritts können ohne Vorankündigungen vorgenommen werden. Wenn nichts anders angegeben alle Maße Millimeter.

This document is the property of Bonn Elektronik GmbH. Reproduction and release without express permission is strictly prohibited. We reserve the right to introduce modifications without prior notification, where they serve technical progress. Unless otherwise indicated all dimensions millimeters.

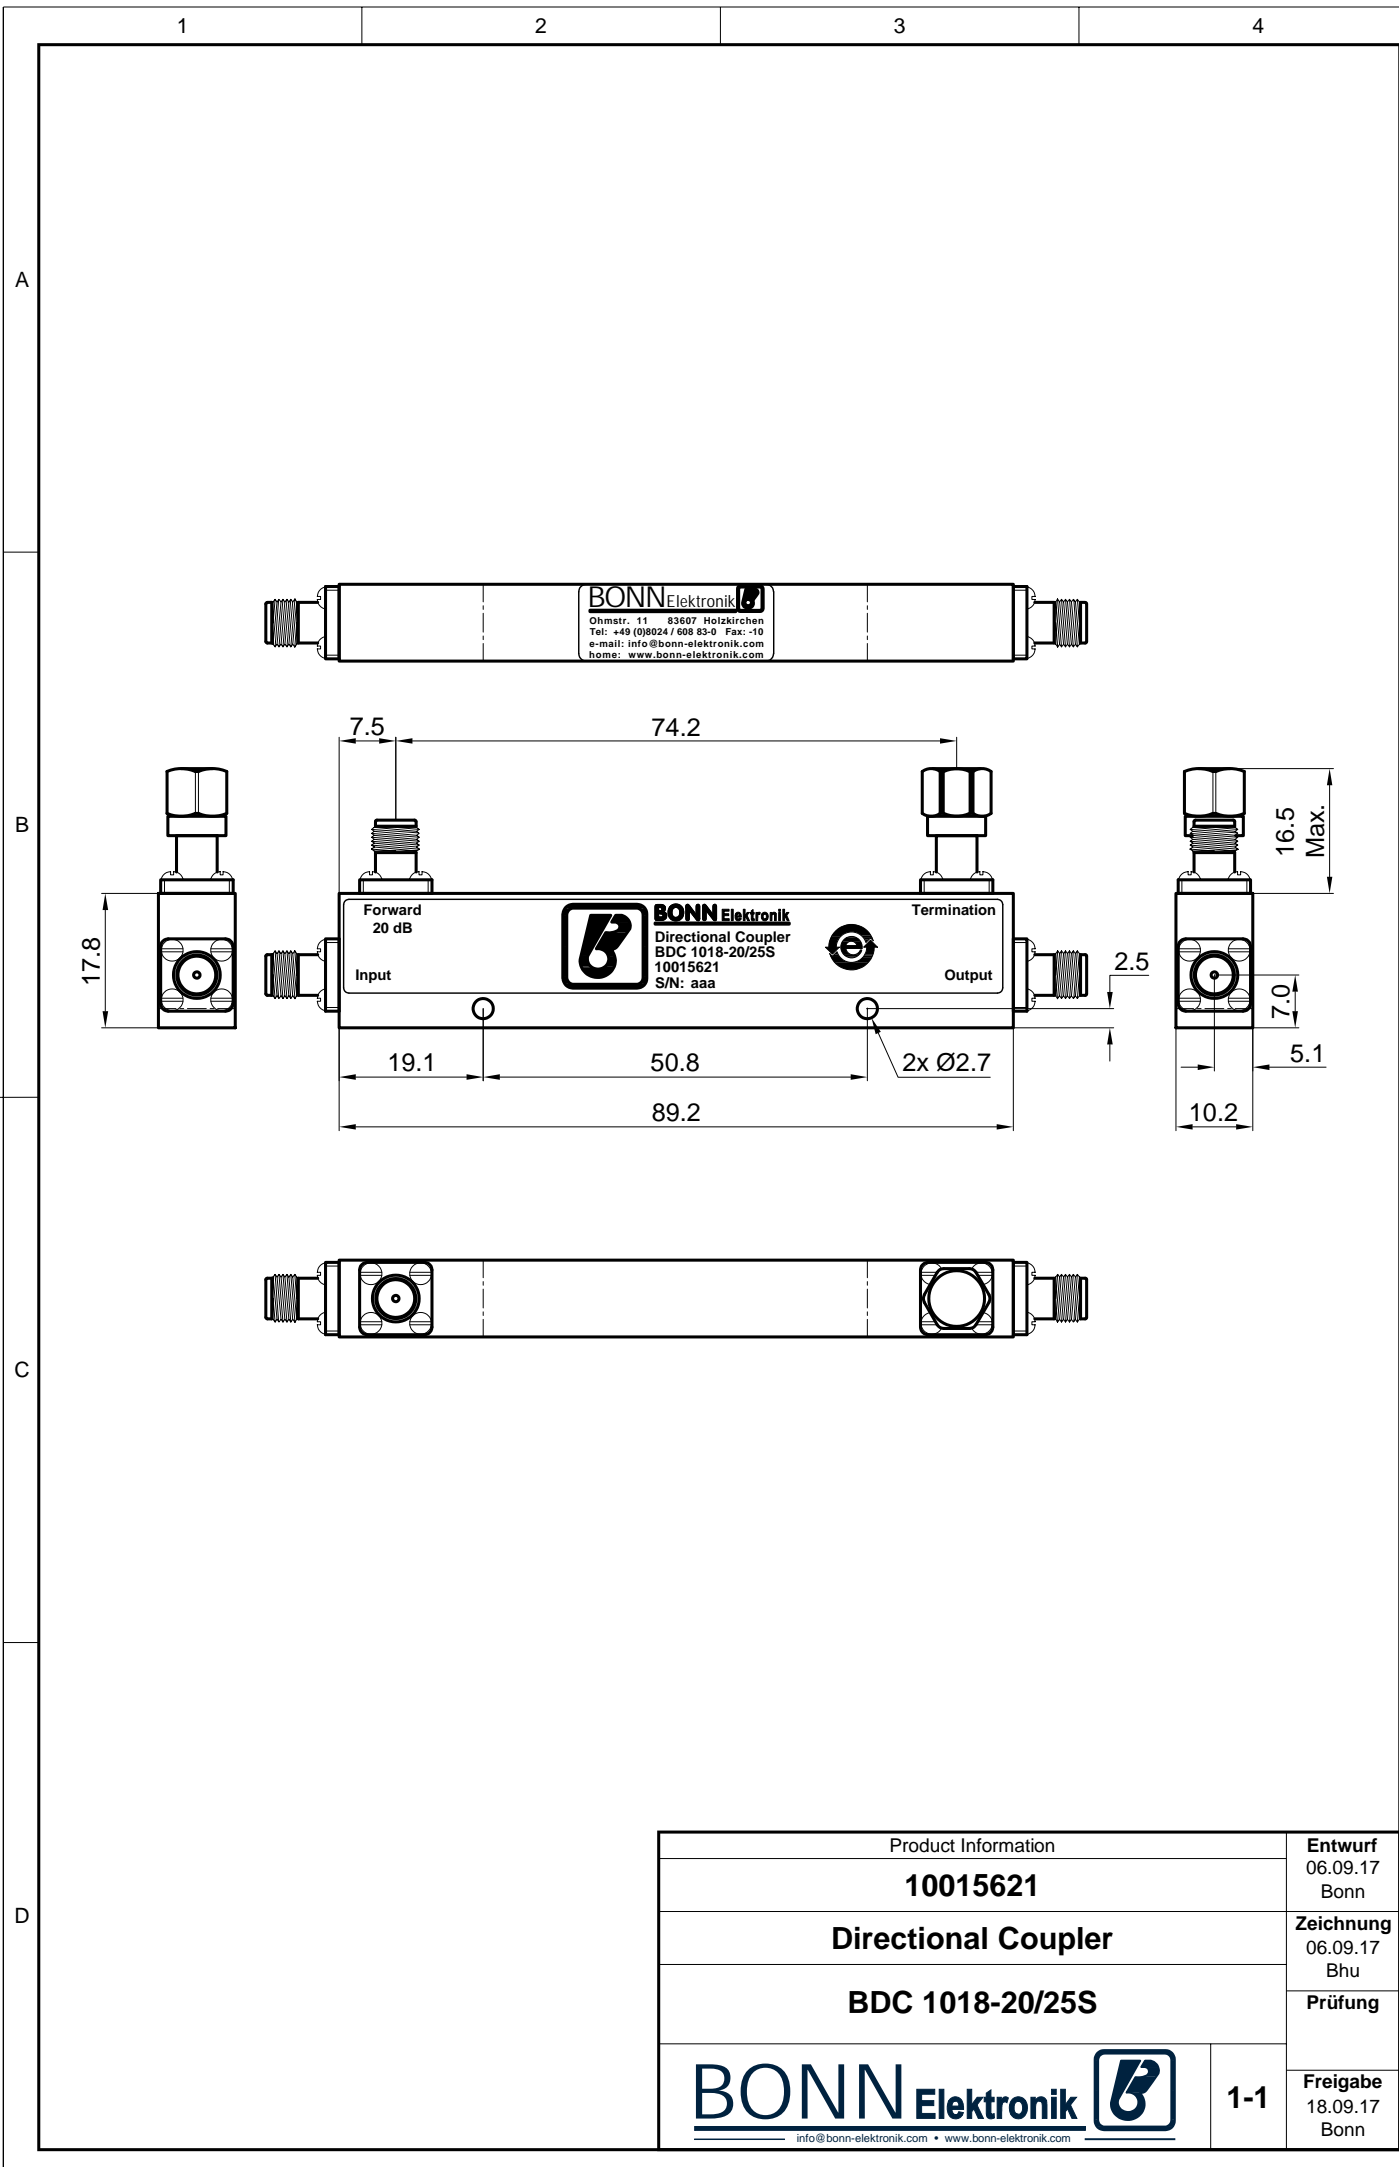

Product Information		Entwurf 06.09.17 Bonn
10015621		Zeichnung 06.09.17 Bhu
Directional Coupler		Prüfung
BDC 1018-20/25S		Freigabe 18.09.17 Bonn
		1-1

ISO - Projection Schutzvermerk nach DIN ISO 16016 beachten Observe copyright indication DIN ISO 16016