

STANDARD MODELS

Model	Frequency Range X)	Coupling X) dB	Power Pmin W	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 0160-40/500	0.1 ... 6 GHz					1.3:1	N-f	N-f
	144 ... 146 MHz	55 ±3	500	0.2	20			
	400 ... 450 MHz	46 ±3	500	0.2	20			
	0.7 ... 6 GHz	40 ±2	500	0.2	20			

S: Single directional coupler

OPTIONS

- 1) male RF input connector
2) alternative main line connectors

- X) custom frequency range and custom coupling attenuation upon request
*) WRD 650: below 6.2 GHz, VSWR and directivity deteriorate

Notice:

Under normal operating conditions all Directional Couplers do not need to be mounted to a heatsink. However, if the units permanently run into high mismatch conditions at full rated power, the circuits will heat up significantly. In this case, we would recommend the units be mounted to a suitable heatsink or metal surface, capable to maintain a baseplate temperature of +60°C max.

A

B

C





D

1


2

3

4

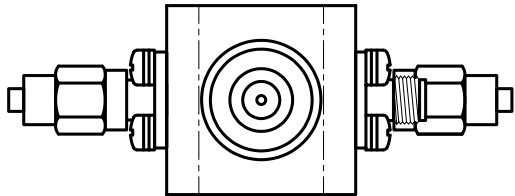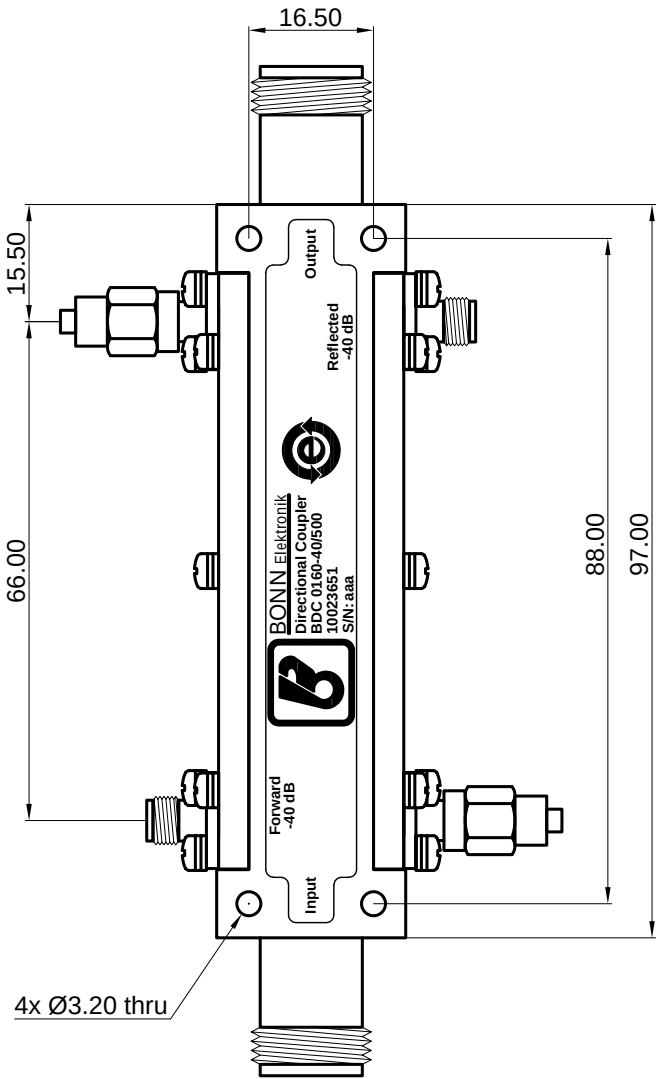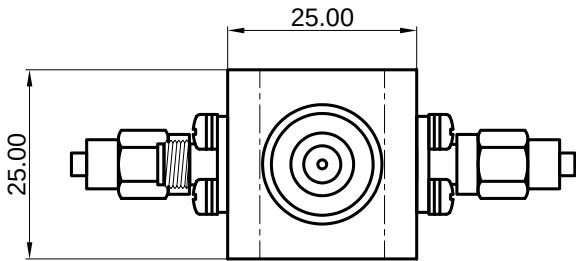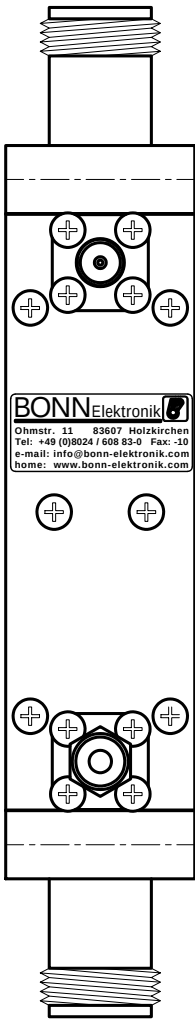

Product Information		Entwurf
10023651		26.07.2022 Bonn
Directional Coupler		Zeichnung
BDC 0160-40/500		26.07.2022 Gharib
 info@bonn-elektronik.com • www.bonn-elektronik.com		Prüfung
		Freigabe 27.07.2022 Bonn
Blatt 1-1		

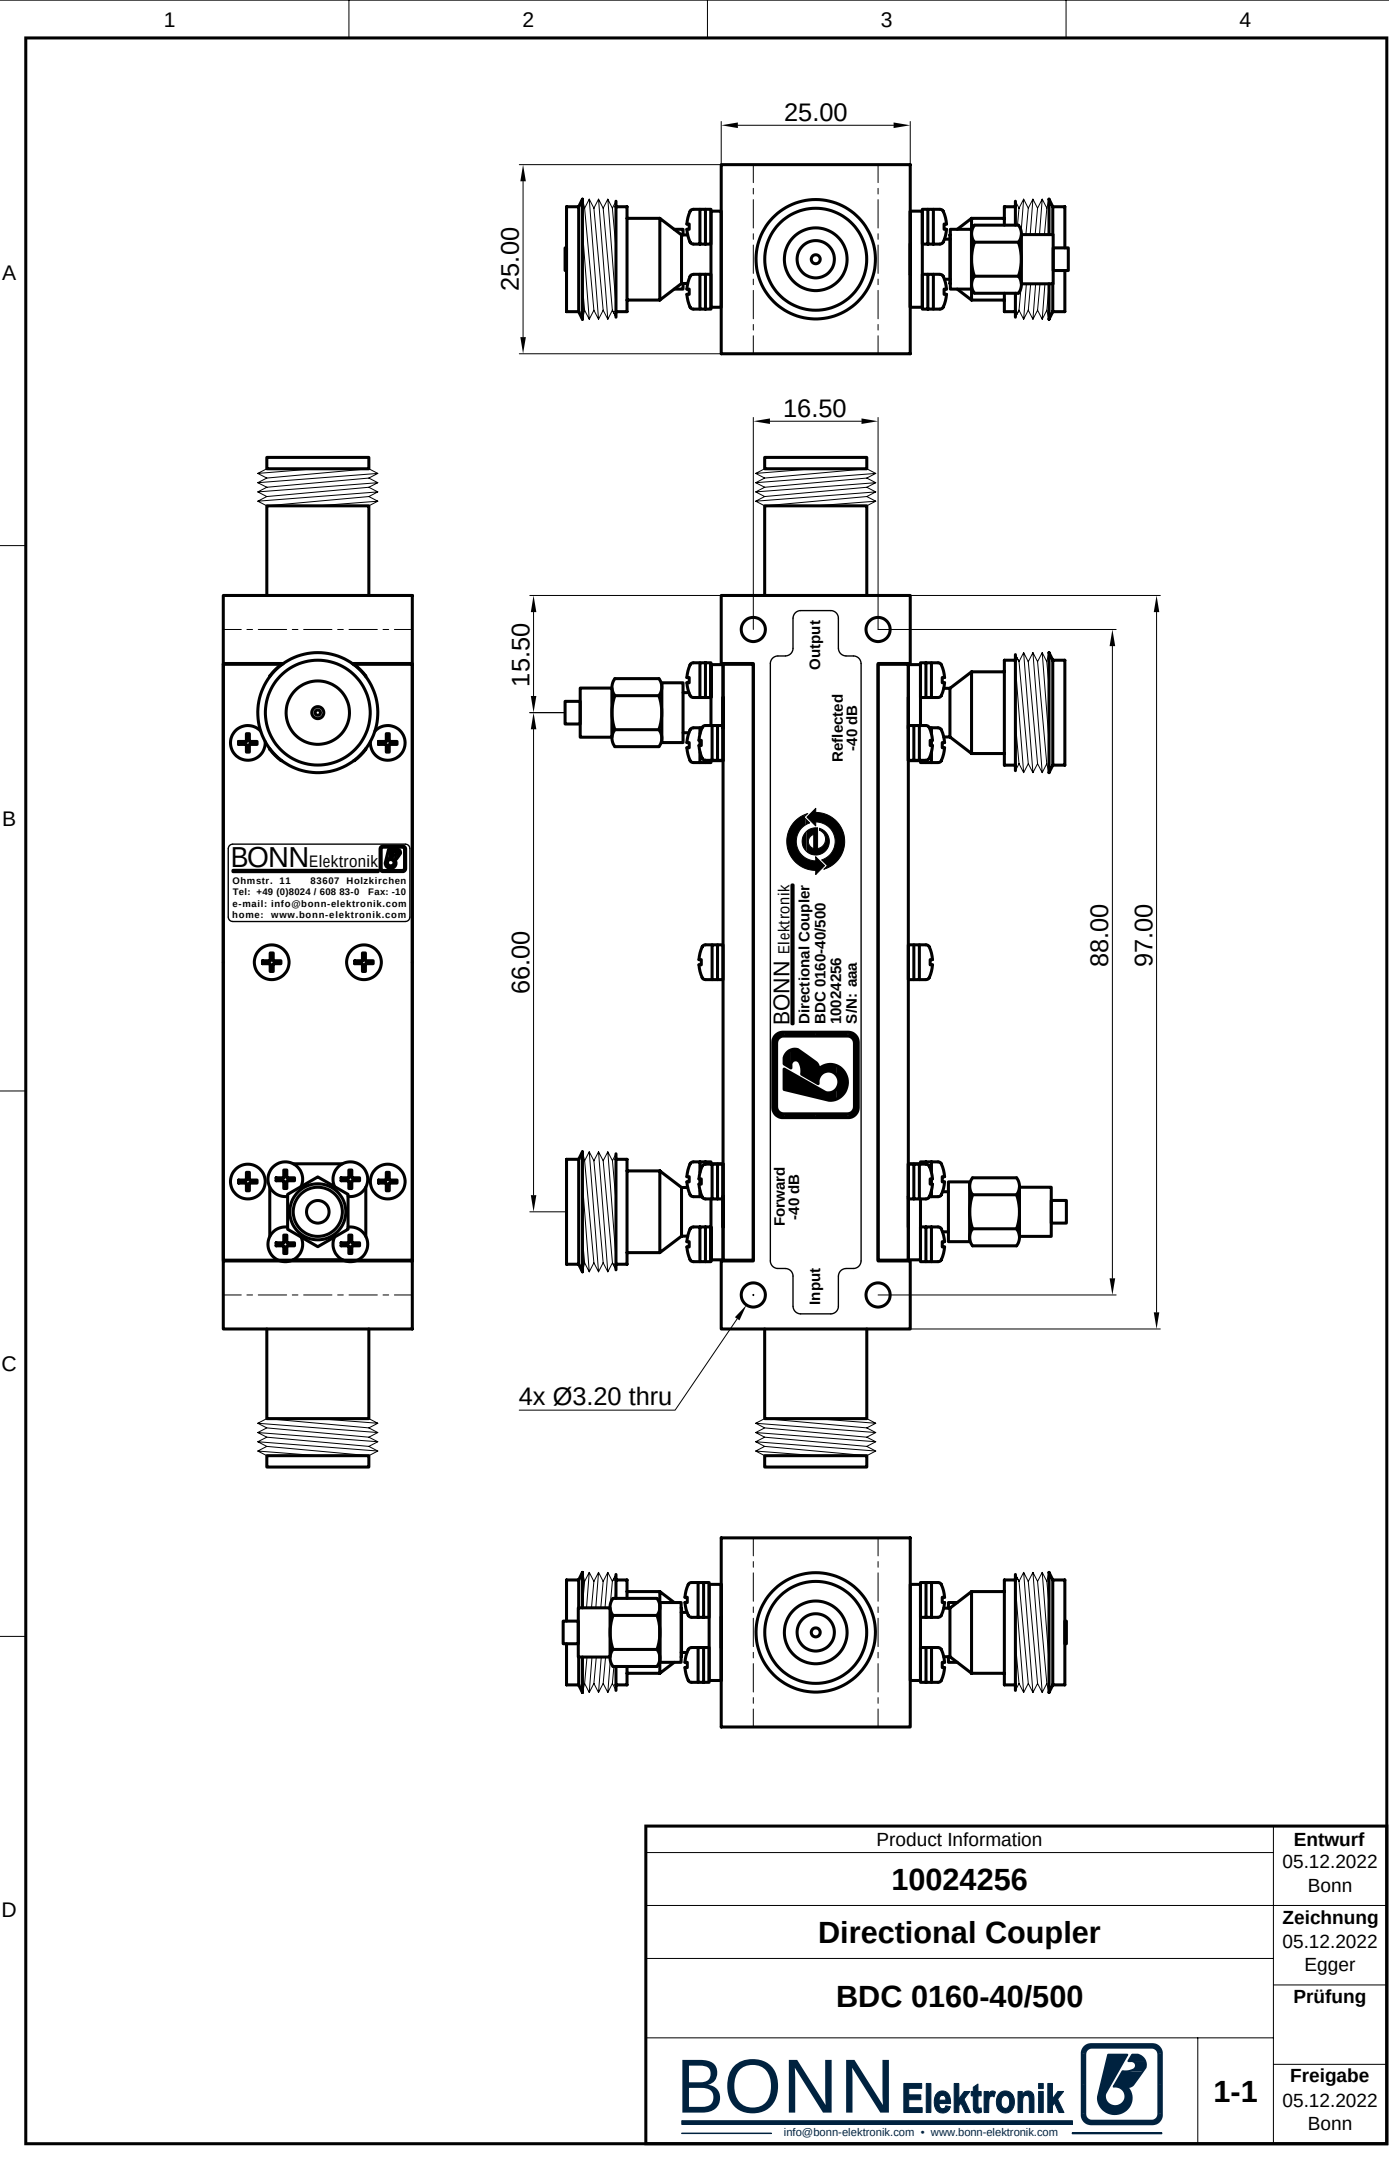

Product Information		Entwurf
10024256		05.12.2022 Bonn
Directional Coupler		Zeichnung 05.12.2022 Egger
BDC 0160-40/500		Prüfung
BONN Elektronik 		Freigabe 05.12.2022 Bonn
1-1		