

BDC 1 ... 18 GHz Directional Coupler

STANDARD MODELS

Model	Frequency Range X)	Power P _{min} W	Coupling X) dB	Insertion Loss max dB	Directivity min dB	VSWR max Main Line	Main Line Connector 1), 2)	Coupling Line Connector 3)
BDC 1018-30/20S	1 ... 18 GHz	20	30 ±1.1	0.8	14	1.4:1	SMA-f	SMA-f

S: Single directional coupler

Dimensions without connectors


OPTIONS


1) male RF input connector

2) alternative main line connectors

3) N-f coupling connectors

X) custom frequency range and custom coupling attenuation upon request

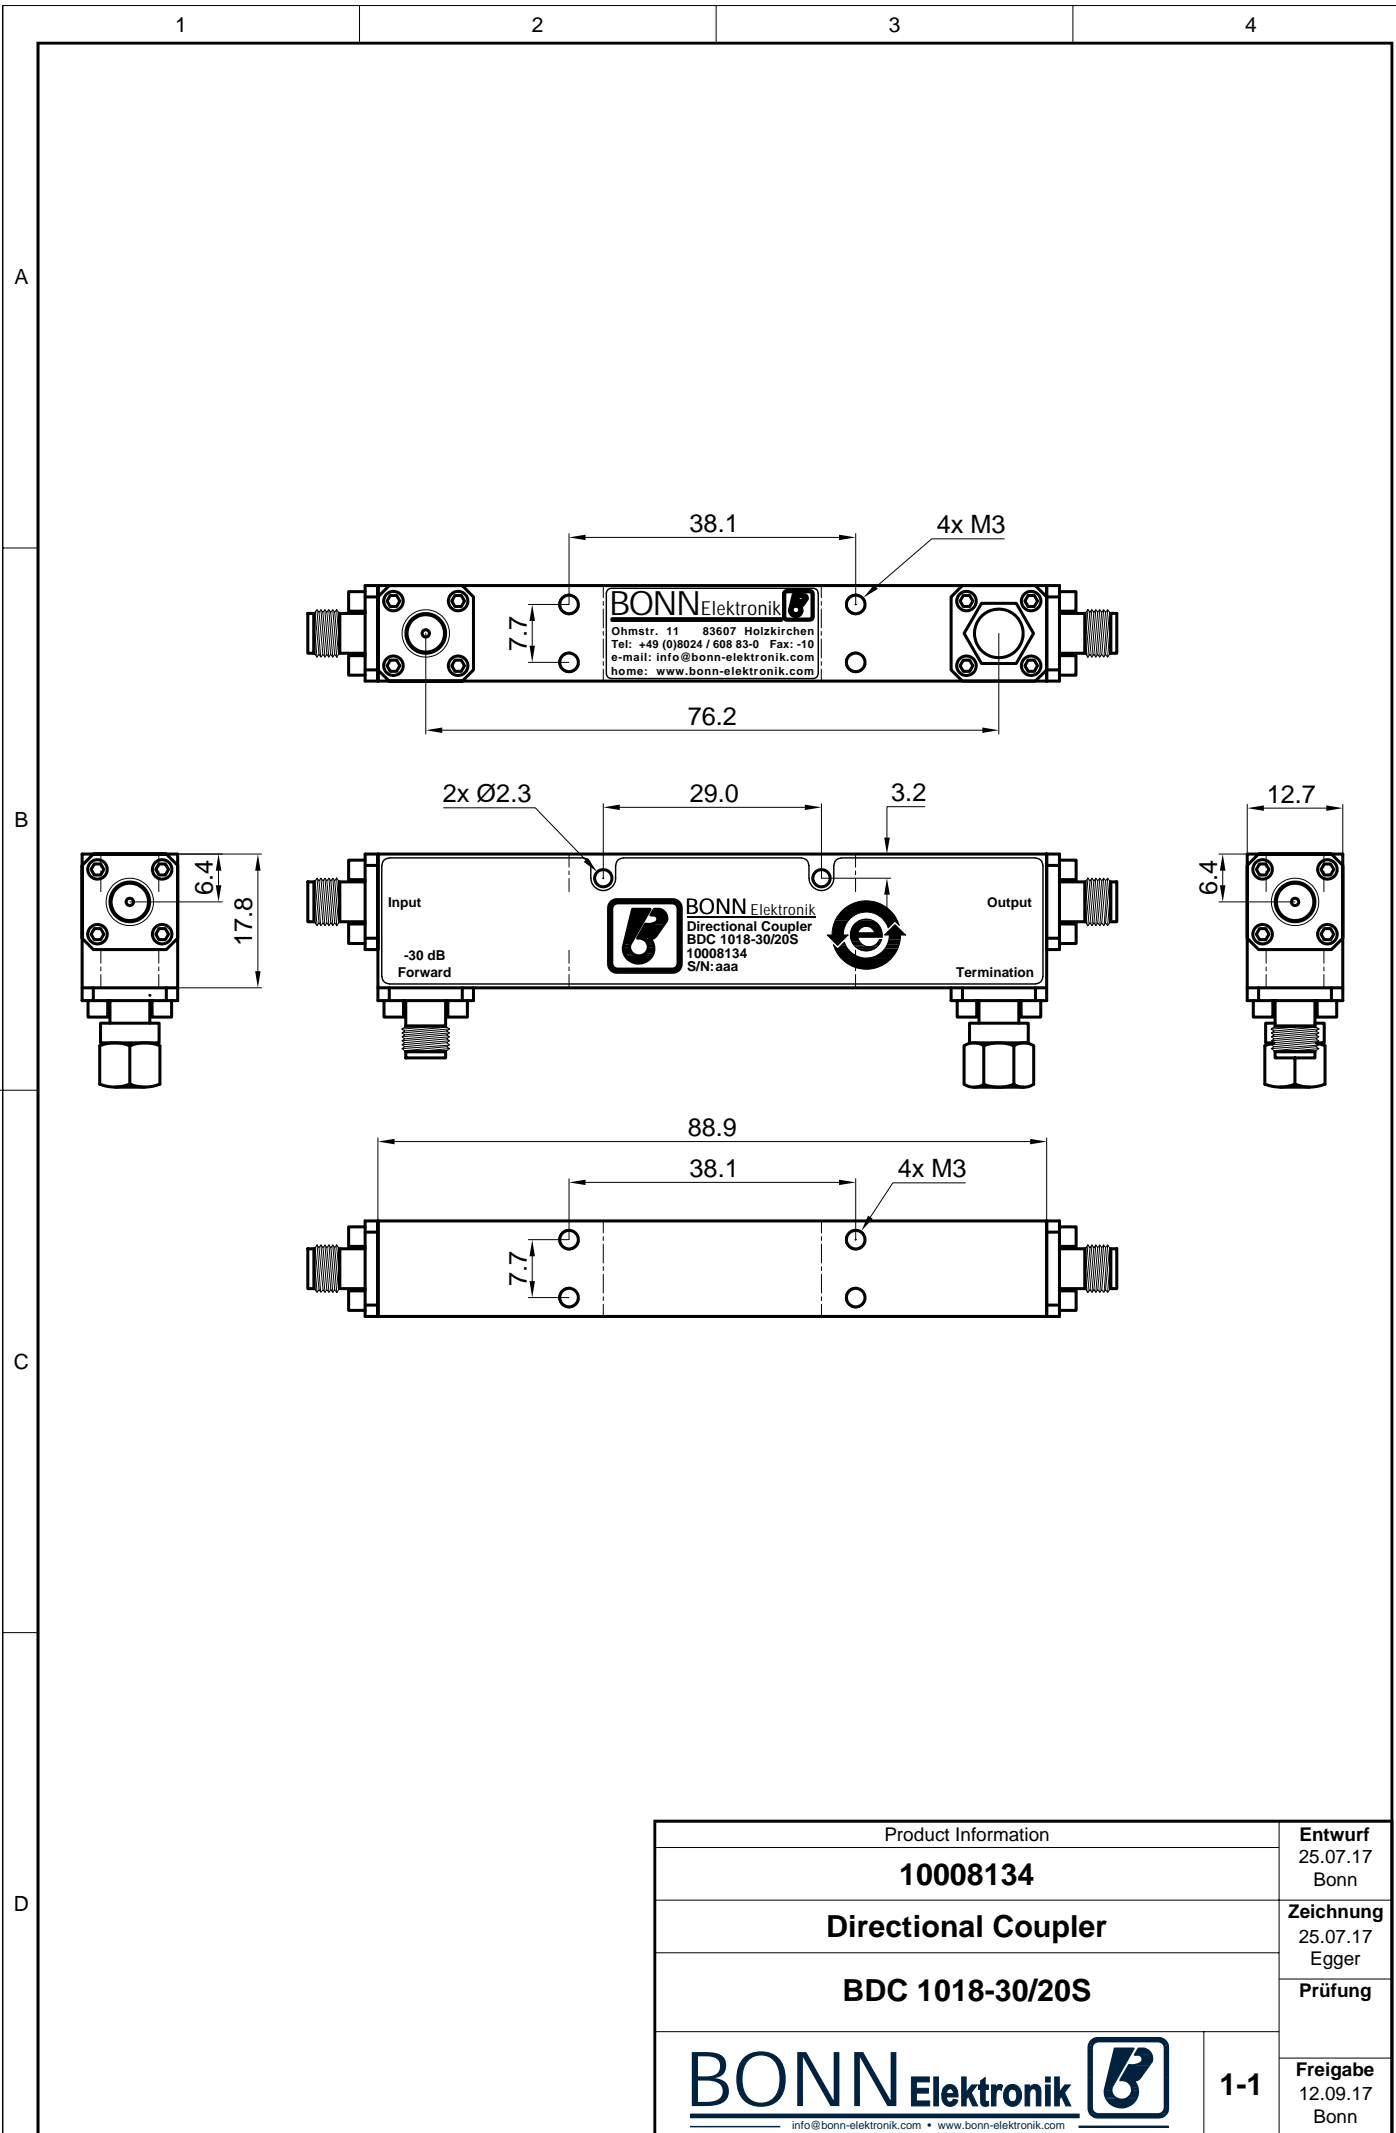

Product Information		Entwurf 25.07.17 Bonn
10008134		Zeichnung 25.07.17 Egger
Directional Coupler		Prüfung
BDC 1018-30/20S		Freigabe 12.09.17 Bonn
		1-1
<small>info@bonn-elektronik.com • www.bonn-elektronik.com</small>		